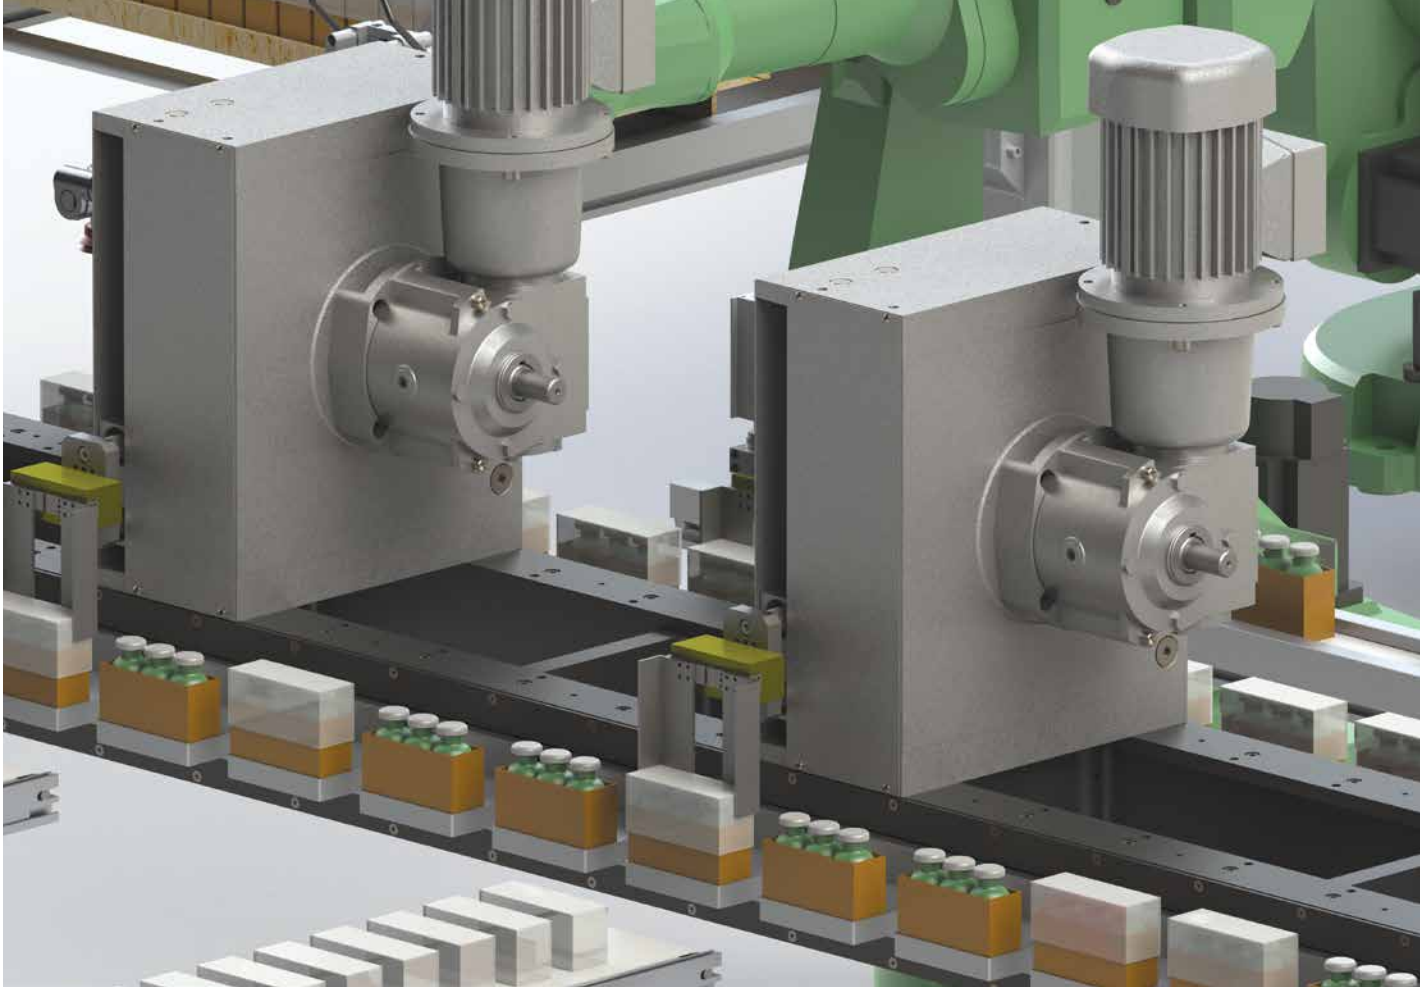


# LINEAR PART HANDLER

## Gripper Mounting Accessory



### Indexer driving a conveyor and Linear Part Handlers

- Operation can be asynchronous (cycle on demand) – a single index followed by a variable dwell time, or the operation can be continuous.
- Index motion time is changed by changing the motion profile of the servo motor.
- Dwell time is variable. Single axis servo or multiple axis servo controllers can be used.
- More than 60 cycles per minute – maximum cycle rate can be determined by your application engineer.

# LINEAR PART HANDLER

Features | Table of Contents



## Features:

---

**CAMCO Cambot® Linear Parts Handlers**, combined with other DESTACO products, offer a low maintenance, cost-effective solution for a complete parts handling package.

Cost effective design for low-cost operation

- Reliable CAMCO mechanical cam design
- Lubed for Life

Easy integration with other DESTACO products for one-stop shopping

- Camco Modular Precision Link Conveyors and Ring Drives
- DESTACO Vacuum products
- Robohand Direct Connect™ Grippers (no adapter plates) and E-Gripper

Customized for your application

- Input shaft available on either side for ease of integration
- Line shaft drive or gear reducer and motor drive package for synchronous or asynchronous operation

Standard or custom strokes and timing designed for your specific requirements

## Applications:

---

Automated production systems with small parts transfer such as consumer products, electronics, and medical device assembly and test.

## Table of Contents

---

How to Order .....	3
M100/M150 .....	5
Gripper Mounting Block .....	6

# LINEAR PART HANDLER

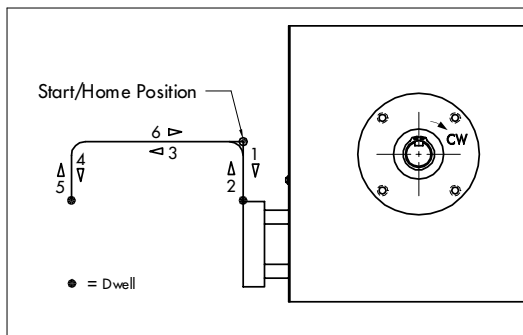
## How To Order

### LPP Ordering Procedure

1. Model
2. Lift (Vertical) Stroke
3. Transfer (Horizontal) Stroke

Standard Strokes: Lift (mm) x Transfer (mm)	
M100	M150
15 x 100	15 x 150
45 x 100	45 x 150
65 x 20	75 x 50
65 x 60	75 x 110
65 x 100	75 x 150

4. Output Sequence (Standard or Custom)









5. Drive Page including Gear Reducer, Motor, and AC Drive

















Model	Gear Reducer	AC Motor	1 hp AC Drive Input Voltage (select 1)		
M100	R180	1/3 hp	120 VAC	240 VAC	480 VAC
M150	R225	3/4 hp	120 VAC	240 VAC	480 VAC

# LINEAR PART HANDLER

## Mounting Position


OHUI (output horizontal, under input)	OHOI (output horizontal, over input)	OHID (output horizontal, input down)	OHIU (output horizontal, input up)	VU (output vertical up)	VD (output vertical down)
 <b>1</b>	 <b>2</b>	 <b>3</b>	 <b>4</b>	 <b>5</b>	 <b>6</b>

## Gear Reducer Mounting Positions

		Mounting "A"		Mounting "B"	
		RH	LH	RH	LH
SIDE 1	 <b>A</b>	 <b>B</b>	 <b>C</b>	 <b>D</b>	
	SIDE 2	 <b>E</b>	 <b>F</b>	 <b>G</b>	 <b>H</b>
		Mounting "C"		Mounting "D"	
		RH	LH	RH	LH
SIDE 1	 <b>J</b>	 <b>K</b>	 <b>L</b>	 <b>M</b>	
	SIDE 2	 <b>N</b>	 <b>P</b>	 <b>R</b>	 <b>S</b>

# M100/M150 SERIES
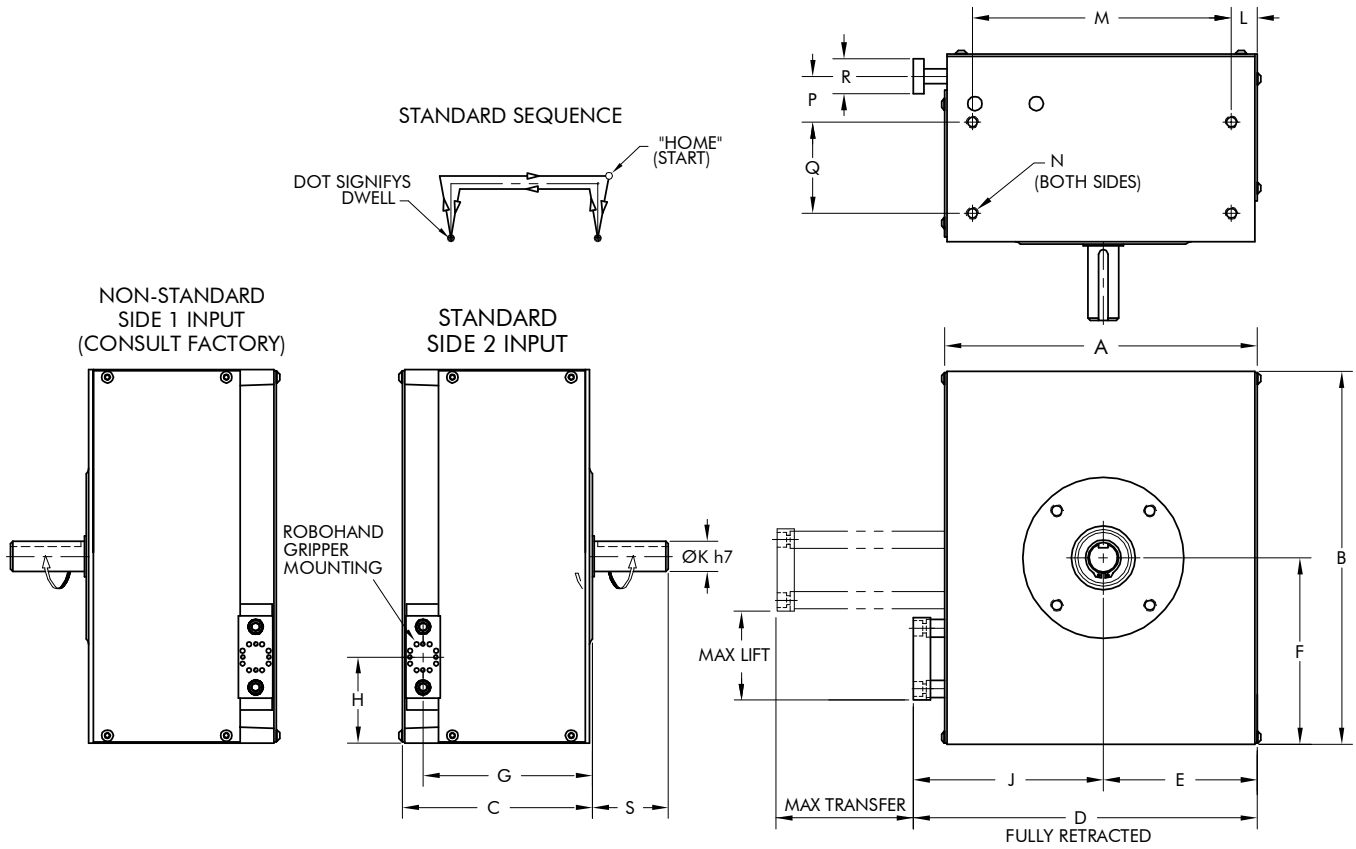
## Linear Part Handler | Dimensions and Technical Information



Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S
M100	251	290	145	279.7	123	145	130	65	157	25	12	225	4 x M8	40	65	25.4	50
M150	332	400	170	366	160	200	148	90	206	30	15	300	4 x M10	40	80	51	55

### Technical Specifications

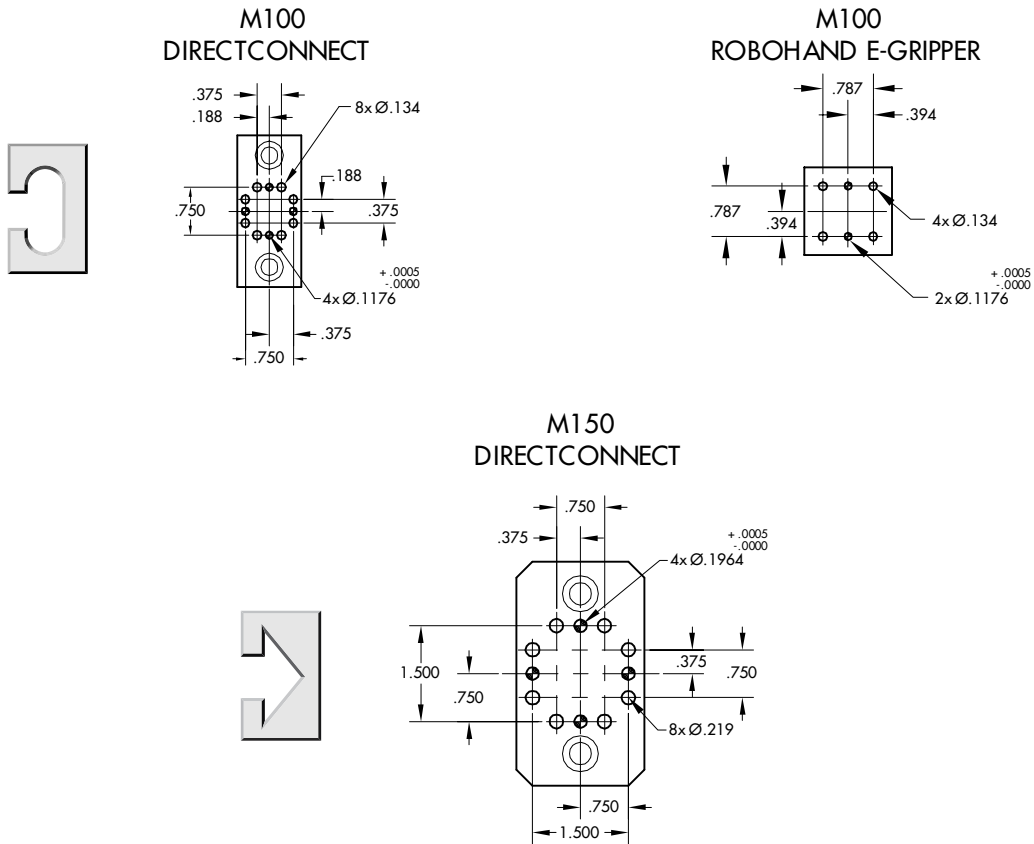
Model	Maximum Lift	Maximum Transfer	Capacity at 30 rpm	Capacity at 60 rpm
M100	65 mm	100 mm	8 kg (18 lbs)	3.6 kg (8 lbs)
M150	75 mm	150 mm	18 kg (40 lbs)	9 kg (20 lbs)

Model	Lift		Transfer	
	Accuracy	Repeatability	Accuracy	Repeatability
M100	±.13 mm (±.005")	±.03 mm (±.001")	±.08 mm (±.003")	±.03 mm (±.001")
M150	±.20 mm (±.008")	±.08 mm (±.003")	±.08 mm (±.003")	±.03 mm (±.001")

# M100/M150 SERIES

Linear Part Handler | Accessories

## Gripper Mounting Block



### RoboHand DirectConnect Grippers & Rotaries

Consult the DESTACO Automation Catalog or your local sales representative for information about these items.

Model	E-Gripper	DPDS/DPDL	DPG	DPP	DPW	DCT	DRF
M100	RPE-100M RPE-101M	DPDS-047M DPDS-056M DPDL-047M DPDL-056M	N/A	DPP-10M-06 DPP-10M-12 DPP-14M-15 DPP-14M-25	DPW-250M-1 DPW-250M-2	DCT-12M DCT-16M DCT-20M	N/A
M150	N/A	DPDS-088M DPDS-125M DPDL-088M DPDL-125M	DPG-10M-1 DPG-10M-2 DPG-10M-3 DPG-10M-4	DPP-20M-25 DPP-20M-28 DPP-28M-31 DPP-28M-50	DPW-375M-1 DPW-375M-2 DPW-500M-1 DPW-500M-2	DCT-25M	DRF/DRG-075M DRF/DRG-094M DRF/DRG-106M