

ORBITAL WELDING

Orbital welding systems and accessories for high-purity process piping





New products



ORBIWELD 17 | Micro weld head

Active-cooled orbital weld head for tubes in semi-conductor production: With its removable clamping cartridge, integrated control elements and active cooling, the ORBIWELD 17 - or OW 17, for short - clearly stands out in comparison to conventional systems from the competition. This makes it possible to weld thin tubes like those used in semi-conductor production easily, quickly, reliably and - above all - with high quality.

- Compatibility with market standards enables trouble-free transitioning to the latest Orbitalum technology
- An extremely slim design for use in confined spaces, such as in the semi-conductor industry
- Removable clamping cartridges specifically for inline assembly or prefab production of modules
- For small tube diameters 3.0 mm to 17.2 mm (0.118" - 0.677")
- COAX tube systems can be welded with wall thicknesses up to 1.62 mm (0.064")
- Highly resilient thanks to their integrated active liquid cooling
- Integrated control panel for operation of the power supply

...more on page 25




ORBIMAT 180 SW | Orbital welding power supply

More quality, safety and flexibility in orbital welding by Industry 4.0 technology: This intelligent power supply connects the orbital welding process with state-of-the-art information and communication technology, and makes for the best welding results, high efficiency and sustainable quality management.

- Future-oriented connectivity by IoT/Industry 4.0 technology
- Sustainable quality management through web-based productivity monitoring
- 100% data recording - data available anywhere at anytime
- Cost saving by precise and digital "PERMANENT GAS" control
- Short welding cycles through unique gas "FLOW FORCE" function
- Increased safety and extended product lifetime through rotor torque control
- Intuitive and simple operation via 12.4" color touch display or rotary actuator
- Automatic programming by entering the tube diameter, wall thickness, material and welding gas
- Integrated liquid cooling system for constant low weld head temperatures

...more on page 7

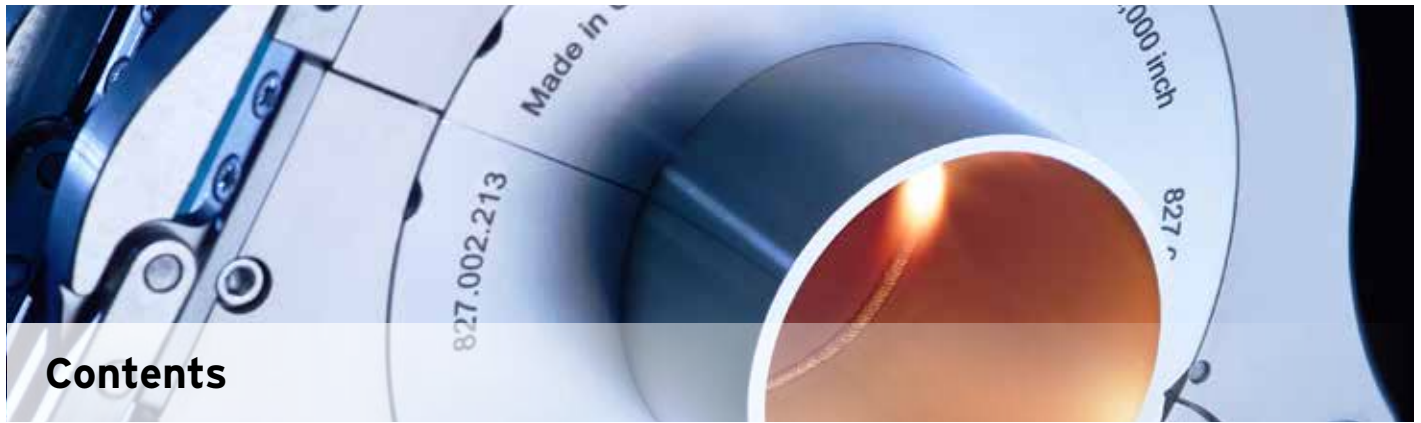

Contents

Markets and Applications.....	4	ORBIWELD 19		P16, P16 AVC	
ORBITAL WELDING POWER SUPPLIES & ACCESSORIES.....	5	Micro weld head.....	29	Tube-to-tube-sheet orbital weld heads.....	67
Compatibility matrix for power sources and weld heads	6	Clamping inserts for OW 19.....	32	Accessories for P16, P16 AVC.....	70
ORBIMAT 180 SW		ORBIWELD 38S, 76S, 115S		Special torches.....	70
Orbital welding power supply.....	7	Enclosed orbital weld heads.....	33	Quick-change adapter torch equipment.....	70
Connectivity package		ORBIWELD 170		Cold wire feed unit "KD" (retrofit kit).....	70
for ORBIMAT 180 SW power supplies	9	Enclosed orbital weld head.....	37	Spring balancer	71
ORBIMAT CA		Accessories for ORBIWELD S and ORBIWELD ...	40	Closed gas cover	71
Orbital welding power supplies	11	Clamping inserts.....	40	Front cage.....	71
Cooling systems for ORBIMAT.....	14	Clamping insert blanks.....	43	Centering tools and retaining arbors.....	72
ORBICAR W trolley with integrated liquid cooling.....	14	Plastic covers for clamping inserts	43	WELDING TURNABLES.....	73
ORBICOOL Active	14	Cavity inserts for moldings.....	43	DVR	
Other accessories for ORBIMAT	15	T-piece clamping inserts.....	44	Welding turntables	75
Power connector adapter set	15	Inserts for elbow welding	44	Accessories for DVR	76
ORBITWIN SW switching device.....	15	Electrode adapters.....	45	Three-jaw lathe chuck	76
ORBICAR S trolley.....	15	Table mounts.....	46	Control cable.....	76
Storage and shipping case	15	HX 12P, HX 25P		Earth cable	76
Soft-/Hardware package "CA".....	16	Enclosed orbital weld heads.....	47	Remote control OWH BASIC.....	77
Storage media.....	16	HX 16P	49	Cold wire feed units DVR	77
Remote control with cable.....	16	Enclosed orbital weld head	49	ACCESSORIES & CONSUMABLES FOR ORBITAL WELDING.....	78
Bar code/QR code scanner SW	16	Accessories for HX.....	52	ESG Plus, ESG Plus²	
Consumables for ORBIMAT	17	Clamping inserts.....	52	Tungsten Grinders.....	79
Paper rolls and ribbon cartridges	17	Bar pressure regulator "Argon"	52	Diamond grinding wheels.....	81
OCL-30 coolant.....	17	OPEN ORBITAL WELD HEADS	53	Cutting device.....	81
Hose connection set ORBIMAT	17	Overview open orbital weld heads	54	Electrode holder	82
ENCLOSED ORBITAL WELD HEADS	19	ORBIWELD TP		Wall-/table-/vice-mounting plate.....	82
Overview enclosed orbital weld heads	19	Open orbital weld heads.....	55	Protective cover.....	82
Electrode lengths/diameter for enclosed weld heads.....	20	Accessories for ORBIWELD TP.....	58	Double-Decker Kit.....	82
ORBIWELD 12		Cold wire feed units "KD" (retrofit kits).....	58	ORBmax	
Micro weld head.....	21	KD retrofit kits.....	58	Residual oxygen meter	83
Clamping cartridges for OW 12, type "A" (narrow).....	23	Clamping units "V2" (retrofit kits)	58	Interface cable ORBmax/ORBIMAT SW.....	84
Clamping cartridge for OW 12, type "B" (wide).....	23	Extension kits for clamping jaws.....	59	Consumables for ORBmax	84
Clamping inserts for OW 12, type "B" (wide).....	24	Control cable.....	59	OTHER ACCESSORIES FOR ORBITAL WELDING	86
ORBIWELD 17		TUBE-TO-TUBE-SHEET ORBITAL WELD HEADS	61	ORBIPURGE forming set.....	86
Micro weld head.....	25	TX 38P		Earth cable	86
Clamping cartridge for OW 17.....	27	Tube-to-tube-sheet orbital weld head.....	63	Hose package extensions	86
Clamping inserts for OW 17.....	28	Accessories for TX 38P.....	66	Pressure regulator	87
		Arbors.....	66	Bar pressure regulator "Argon".....	87
		Spring sleeves	66	WS2 tungsten electrodes.....	87
		Clamping segments.....	66	Power connector adapter set	87
		Tungsten support.....	66	TIG manual welding torch for ORBIMAT.....	88
				Torch and cold wire consumables.....	89



Markets and Applications

Orbitalum manufactures the world's most complete line of portable, powered tube and pipe cutting, facing and beveling weld preparation machine tools. In addition we build a complete line of advanced orbital welding systems used in high purity, process piping and specialized heat exchanger applications. Orbitalum products are widely used in the following industries:

APPLICATIONS	E.G.	PRODUCTS
Heat Exchanger	<ul style="list-style-type: none"> • Shell & tube • Box header • HVAC • Seal weld (autogenous) • Strength weld (wire) • Gas cabinets • Component manufacturing 	<ul style="list-style-type: none"> • RPG Tube squaring machines • BRB Boiler pipe preparation machines • ORBIMAT Orbital welding power supplies • ORBIWELD Orbital weld heads • P16 Tube-to-tube-sheet orbital weld heads • HX Orbital weld heads • TX Orbital weld heads • ORBmax Residual oxygen meter
Pharmacy and Chemistry	<ul style="list-style-type: none"> • UHP water lines • Process lines • Mixing valves • CIP clean in place lines 	<ul style="list-style-type: none"> • GF, PS, RA & GFX Pipe cutting & beveling machines • RPG Tube squaring machines • ORBIMAT Orbital welding power supplies • ORBIWELD Orbital weld heads • ORBmax Residual oxygen meter
Semicon	<ul style="list-style-type: none"> • UHP water lines • Vacuum lines • Wafer processing lines • CFOS lines • Jacketed product • Gas cabinets • Component manufacturing 	<ul style="list-style-type: none"> • RPG Tube squaring machines • ORBIMAT Orbital welding power supplies • ORBIWELD Orbital weld heads • ORBmax Residual oxygen meter
Aerospace	<ul style="list-style-type: none"> • Airframe hydraulic lines • Engine fuel lines • Engine specific components • Onboard HVAC 	<ul style="list-style-type: none"> • GF, PS, RA & GFX Pipe cutting & beveling machines • RPG Tube squaring machines • ORBIMAT Orbital welding power supplies • ORBIWELD Orbital weld heads • ORBmax Residual oxygen meter
Food & Dairy	<ul style="list-style-type: none"> • Product water lines • Jacketed product • Mixing valves • CIP clean in place lines 	<ul style="list-style-type: none"> • GF, PS, RA & GFX Pipe cutting & beveling machines • RPG Tube squaring machines • ORBIMAT Orbital welding power supplies • ORBIWELD Orbital weld heads • ORBmax Residual oxygen meter

Orbital welding power supplies & accessories



Compatibility matrix for power sources and weld heads

The following overview shows the different combination possibilities of our orbital power sources and weld heads to help you to configure the correct orbital welding system.

Would you like a personal consultation? Then simply contact us by phone +49 (0) 77 31 792-0 or by e-mail to tools@orbitalum.com. Our team will gladly help you finding the suitable solution for your individual application.

	ORBIMAT 180 SW 850 000 001	ORBIMAT 300 CA 872 000 010	ORBIMAT 300 CA AC/DC 877 000 001	ORBIMAT 300 CA AVC/OSC 872 000 020	ORBITWIN SW 853 000 001
ORBIWELD 12 821 000 010	●	●	☉*	●	●
ORBIWELD 17 817 000 001	●	●	☉*	●	●
ORBIWELD 19 822 000 010	●	●	☉*	●	●
ORBIWELD 38S 826 000 001	●	●	☉*	●	●
ORBIWELD 76S 827 000 001	●	●	☉*	●	●
ORBIWELD 115S 828 000 001	●	●	●	●	●
ORBIWELD 170 825 000 001	●	●	●	●	●
HX 12P 847 000 010	●	●	☉*	●	○
HX 16P 848 000 010	●	●	☉*	●	○
HX 25P 845 000 010	●	●	☉*	●	○
TP 250 (KD) 811 000 001 811 000 005	●	●	●	●	●
TP 400 (KD) 812 000 011	●	●	●	●	●
TP 600 (KD) 813 000 001 813 000 005	●	●	●	●	●
TP 1000 (KD) 814 000 001 814 000 005	●	●	●	●	●
TP 400 AVC/OSC 812 000 012	○	○	○	●	○
TP 600 AVC/OSC 813 000 002	○	○	○	●	○
TP 1000 AVC/OSC 814 000 002	○	○	○	●	○
TX 38P 830 000 005	●	●	●	●	●
P16 (KD) 831 000 001 831 000 003	●	●	●	●	●
P16 AVC 831 000 002	○	○	○	●	○
DVR Welding turntables	●	●	●	●	●
Manual torch 890 013 010	●	●	●	●	●

● = compatible

○ = not compatible

☉ = partly compatible

* = DC welding only

KD = Cold wire feed

ORBIMAT 180 SW

Orbital welding power supply

World premiere:

Intelligent
welding power supply

More quality, safety and flexibility in orbital welding by Industry 4.0 technology: This intelligent power supply connects the orbital welding process with state-of-the-art information and communication technology, and makes for the best welding results, high efficiency and sustainable quality management.

The ORBIMAT 180 SW (shown here with the ORBIWELD 76S weld head) – an innovative welding power supply which sets new standards in welding results, operability and communication



Future-oriented connectivity

by IoT/Industry 4.0 technology
(Connectivity IoT/4.0 Package 1 required)



Longer-term **welding data documentation** thanks to centralized data storage



100% data recording – data available anywhere at anytime



Cost saving by precise and digital "PERMANENT GAS" control



Short welding cycles through unique gas "FLOW FORCE" function



Increased safety and extended product lifetime through rotor torque control



Intuitive and simple operation via 12.4" color touch display or rotary actuator



Automatic programming by entering the tube diameter, wall thickness, material and welding gas



Integrated liquid cooling system for constant low weld head temperatures



This new generation of orbital welding power supplies combines the well-known and successful characteristics of the predecessors with the latest technical innovations:

Centralized access to projects and parameters

Thanks to the integrated LAN interface, the ORBIMAT 180 SW can be integrated into the customer's network: All welding data and programs for each individual welding process can be called up and documented in full, analyzed, used and optimized for future welding processes. This way, production sequences can be planned better and are also safer and less time-consuming.

Intuitive operation and a multilingual menu interface

The ORBIMAT 180 SW is operated using the 12.4" color touch display screen, or alternatively with the multifunctional control dial, as is familiar from premium automobiles and the ORBIMAT

CA series. The multilingual menu interface with graphic support makes operation and parametrization of the welding power supply simple and intuitive. Soft keys provide direct access to important commands.

More quality and safety

The ORBIMAT 180 SW achieves more quality thanks to digital and precise welding gas control "PERMANENT GAS". It makes it possible to perform welding processes with the highest level of purity and a low gas requirement, reducing the costs for each welding process. The gas quantity values saved with the welding program therefore make easily reproducible welding results.

The automatic rotor stop function provides improved safety. The ORBIMAT 180 SW also features motor torque control: If the welding head rotor is prevented from rotating by sluggishness or an obstruction during automatic rotation, the power supply stops the rotor movement of the

welding head immediately. Man and machine are provided with better protection, and costly production downtimes, caused by rejected goods and repairs, are prevented. At the same time, the service life of the welding head is extended.

Shorter welding cycles and more productivity

In order to minimize the gas pre-flow and post-flow times, ORBITALUM has incorporated the unique Flow-Force function. It shortens the welding process considerably when using closed welding heads: The digital gas control supplies inert gas at a very high volumetric flow rate directly from the pressure regulator to the welding head – the unwanted residual oxygen is flushed out abruptly in the process. The resultant reduced pre-flow and post-flow times make for much shorter processing times and thus a higher level of productivity and an increased duty cycle. The high volumetric flow rate in the post-flow time and the optionally activatable cooling circuit delay reduce the temperature of



FEATURES	ORBIMAT 180 SW
Simple and convenient operation thanks to multifunctional rotary actuator	●
Touchscreen operation	●
DC welding possible	●
WIDE RANGE input voltages for safe operation of power sets or voltage networks with extreme fluctuations in voltage	●
"Flow Force" function to reduce the gas pre-flow and post-flow time	●
"Permanent gas" function	●
Digital controlled welding gas	●
Coolant liquid and welding gas are monitored	●
Control option for cold wire feed	●
Possibility of connecting an external remote control	●
Constant or pulsed wire feed motion and rotation	●
Optimal visibility and operating conditions thanks to clearly laid-out 12.4" swivel monitor	●
Graphically-supported operating interface and multilingual menu navigation via color display	●
Metric and imperial units	●
Process-oriented, stable and real-time operating system without power-down sequence	●
Automatic weld head recognition and resulting parameter adaptation	●
Motor current monitoring	●
Capacity to store over 5.000 welding programs, providing systematic and clear program management thanks to the creation of folder structures	●
Welding data logging and printout of actual values	●
Integrated system printer	●
Possibility of connecting a monitor or printer (through HDMI/USB/LAN)	●
Integrated carrying grips	●
Option to program up to 99 sectors	●
Power and motor slope adjustment between the individual sectors	●
Integrated liquid cooling system for cooling the connected weld heads	●
Can be used in combination with separately available liquid cooling system	●

● = feature included ● = feature limited included

TECHNICAL DATA	
ORBIMAT 180 SW	Code 850 000 001
Connectivity IOT/4.0 Package 1	Code 850 080 001
Connection voltage	110 - 230 V, 50/60 Hz, 1 phase
Control range (Connection voltage > 160 V)	5 - 180 A
Power-on time	60% at 180 A 100% at 160 A
Dimensions	600 x 400 x 310 mm 23.6" x 15.7" x 12.2"
SCOPE OF DELIVERY	
Orbital welding power supply ORBIMAT 180 SW	1 Pc.
Hose connection set ORBIMAT (Code 875 030 018)	1 Pc.
Dummy plug for remote control socket (Code 850 050 004)	1 Pc.
OCL-30 coolant, 3.5 liters (Code 850 030 010)	1 can
Operating instructions with calibration certificate	1 Set
QuickStart guide	1 Pc.
SUITABLE ACCESSORIES	
<ul style="list-style-type: none"> • ORBICAR W trolley with integrated liquid cooling • ORBICOOL Active compressor cooling device • ORBICAR S trolley • Storage and shipping case • ORBITWIN SW switching device • Remote control with cable • Bar code/QR code scanner SW • ORBmax residual oxygen meter • Pressure regulator • TIG manual welding torch for ORBIMAT 	

The technical data are not binding. They are not warranted characteristics and are subject to change.

the welding head - ideal for a high duty cycle. The benefits include a longer service life for the welding electrode. The optionally activatable permanent gas function prevents the penetration of oxygen in the welding head, even during secondary processing times. As a result, the ORBIMAT system achieves almost completely oxidation-free seams with simultaneously short processing times.

Elegant housing for good handling

The ORBIMAT 180 SW features an elegant and practical housing with carrier handles integrated at the side. The ports on the front of the device are set back for protection from mechanical damage. The hinged lid with display screen, when closed, protects the operating controls, the system printer and the control dial if the device is offline or is being transported.

The ORBIMAT 180 SW operates with a wide input voltage range of 110 V to 230 V AC 50/60 Hz, and offsets mains fluctuations of 90 V to 260 V AC. At 180 A, the output welding current is suitable for most applications. The ORBIMAT power supply automatically detects and includes the connected system components. The integrated liquid cooling system keeps connected welding heads constantly at the right temperature.

Expandable with "Connectivity Package"

The optionally available "Connectivity Package 1" allows the saving and calling up of welding programs via a central network location. To increase the process control of the documentation all log files can be stored centrally. Detailed information on "Connectivity Package 1" starting on page 9.


Connectivity package

for ORBIMAT 180 SW power supplies

Backing up and further processing

welding parameters
in local network environments

The optionally available "Connectivity Package 1" enables integration of the ORBIMAT 180 SW into a local network environment (LAN). Welding programs can thus be saved to centralized network storage locations and managed & backed up for the long term there. Power supplies integrated into the network can access the centrally saved programs and their folder structure at the same time. This ensures that all power supplies always have access to the latest version of the data, even if subsequent adjustments are made to programs.

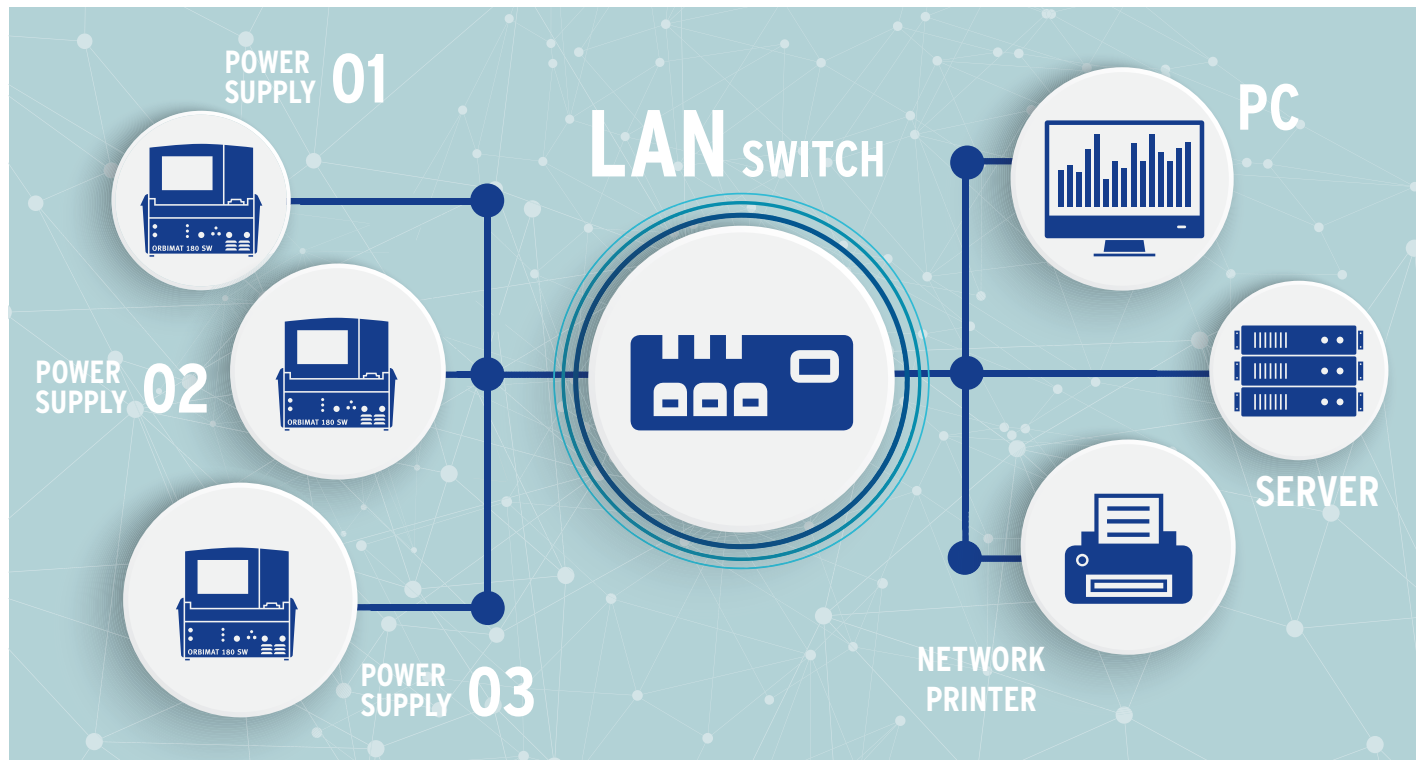

The ORBIMAT 180 SW features an extensive, user-supporting documentation solution for digitally recording documentation parameters ahead of the welding process, e.g. the material and gas batch number, isometric number, weld seam position and the welder ID.

The documentation parameters to be entered are queried before the respective start of the welding process. Whether a parameter value can or must be entered once or for each weld can be individually defined.

This entry can be made either using the virtual keyboard, an external USB keyboard or efficiently using the separately available bar code/QR code scanner.

The option of documentation of the general conditions applicable for the welding programs, e.g. forming and welding gas types and volumes, electrode geometries, weld head alignment and operator comments round out the documentation process.

All recorded parameters can be recorded together with the generated welding data in a welding data log and saved digitally. These welding data logs can then be saved at the network storage location automatically, backed up for the long term and edited from there.

This makes it possible to considerably reduce and simplify the documentation effort for users.

In addition to network storage locations, other network resources like network printers can

also be accessed. In this way, welding logs and programs can be directly output locally via a printer over the network upon request.

Using the Industry 4.0/IoT data protocol "MQTT", the ORBIMAT 180 SW can be integrated into industrial environments 4.0 and "Machine-to-Machine" (M2M) communication can be established between devices and controllers. In this way, subscribers can exchange various different telemetry data, measurement values and parameters with one another and receive control commands for automation solutions.

The connectivity package is activated using a license key which can be entered directly into the power supply software. In this way, all relevant functions and interfaces can be immediately activated.



ORBIMAT 180 SW

Orbital welding power supplies

ORBIMAT 180 SW (SmartWelder)

Features, application range, technical data and scope of delivery, see from page 7.

ARTICLE	VERSION	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
ORBIMAT 180 SW	110 - 230 V, 50/60 Hz, 1 phase	850 000 001		24.600	27.000
Connectivity IoT/4.0 Package 1		850 080 001		0.002	

Suitable accessories (available option):


- ORBICAR W trolley with integrated liquid cooling, see page 14
- ORBICOOL Active compressor cooling device, see page 14
- ORBICAR S trolley, see page 15
- Storage and shipping case, see page 15
- ORBITWIN SW switching device, see page 15
- Remote control with cable, see page 16
- Bar code/QR code scanner SW, see page 16
- ORBmax residual oxygen meter, see page 83
- TIG manual welding torch, see page 88
- Pressure regulator, see page 87

ORBIMAT CA

Orbital welding power supplies

Compact power supplies for mechanized TIG orbital welding with a currently unique operating concept and a whole series of other special technical features.

In connection with an ORBITALUM orbital weld head, the user is being offered an extremely innovative and economical welding system.

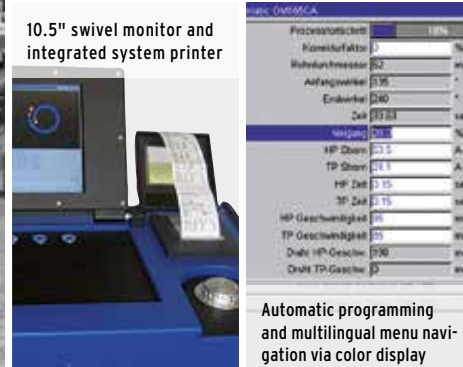

In addition to the reliable automatic programming which generates welding parameters by entering the tube diameter, wall thickness, material and welding gas all ORBIMAT CA models also include a FLOW FORCE function to reduce the pre-flow gas time when the weld heads are closed in the standard model.

The operating concept for the power supply is quite different from the standard operating variants available on the market: The operator guidance with a display and single-knob operation originates from the automotive manufacturing sector and has become tried and tested worldwide in the "information entertainment systems" in modern luxury vehicles. The main advantage of this is that the gaze of the operator remains focused on the screen.

Other technical refinements of the ORBIMAT CA include softkeys for essential, high-level and quick-action commands such as "Start/Stop". Compared to WINDOWS systems, the operating system in use - RTOS (Real Time Operating System) - has the advantage that not even a direct, abrupt shutdown of the system will lead to any problems. This is particularly important for the operation of susceptible power supplies, such as on building sites. Compare to Windows - where the graphic presentation of the current screen window is important - RTOS always focuses on the steering and control of the welding process, which is ultimately crucial for the quality of the welding result.

Moreover, the Flow Force function, which decisively shortens the work process through the use of closed weld heads, is also unique on the

market. Before the start of the welding process, inert gas is fed from the pressure reducer through a second duct for inert gas into the chamber of the weld head - and the undesired oxygen is rinsed out abruptly; the ORBIMAT power supply automatically detects and takes into account for the course of the process any connected system components, from the sealed or open weld head with automatic control of the arc clearance* (AVC = Arc Voltage Control) and/or the integrated oscillation of the torch* (OSC = Oscillation) through to the oxygen analysis unit. In contrast to conventional orbital welding power controllers, the setting and controlling of the torch clearance with regard to the weld seam is carried out directly via the arc clearance.

* ORBIMAT 300 AVC/OSC only




FEATURES ORBITAT ORBITAL WELDING POWER SUPPLIES:		300 CA	300 CA AC/DC	300 CA AVC/OSC
Simple and convenient operation thanks to multifunctional rotary actuator		●	●	●
DC welding possible		●	●	●
AC power source for welding of aluminum materials		○	●	○
"Flow Force" function to reduce the gas pre-flow and post-flow time		●	●	●
"Permanent gas" function		●	●	●
Coolant liquid and welding gas are monitored		●	●	●
Control option for cold wire feed		●	●	●
Possibility of connecting an external remote control		●	●	●
Constant or pulsed wire feed motion and rotation		●	●	●
Optimal visibility and operating conditions thanks to clearly laid-out 10.5" swivel monitor		●	●	●
Graphically-supported operating interface and multilingual menu navigation via color display		●	●	●
Metric and imperial units		●	●	●
Process-oriented, stable and real-time operating system without power-down sequence		●	●	●
Automatic weld head recognition and resulting parameter adaptation		●	●	●
Capacity to store over 5.000 welding programs, providing systematic and clear program management thanks to the creation of folder structures		●	●	●
Welding data logging and printout of actual values		●	●*	●
Integrated system printer		●	●	●
Possibility of connecting a monitor or printer (through VGA/LPT)		●	●	●
Built-in multi-in-one card reader to transfer log files and welding programs via CompactFlash Card (CF), SD, MMC, SM, Sony Memory Stick		●	●	●
Optional PC software (OrbiProg CA) for welding program management and logging		●	●	●
Integrated, folding carrying grips		●	●	●
PSS (Pro Service System) for external function check of the device as well as for easy maintenance and quick exchange of the components by systematical modular design		●	●	●
Option to program up to 99 sectors		●	●	●
Power and motor slope adjustment between the individual sectors		●	●	●
Can only be used in combination with separately available liquid cooling system		●	●	●
AC option to set a positive and negative half-cycle in the ratio 20 - 80%		○	●	○
AC frequency setting 50 - 200 Hz		○	●	○
AVC arc voltage control: Calculates and programs the length of the arc automatically in "mm" or in "V"; With the OSC (oscillation) function, the center of the seam can be accessed manually and be determined using an automatic scanner. The electrode accesses each of side of the seam and then calculates the center of the path automatically.		○	○	●
SCOPE OF DELIVERY		300 CA	300 CA AC/DC	300 CA AVC/OSC
Orbital welding power supply of the ORBITAT CA series	Pc.	1	1	1
Hose connection set ORBITAT (Code 875 030 018)	Pc.	1	1	1
Dummy plug for remote control socket (Code 875 050 006)	Pc.	1	1	1
Power connector adapter	Pc.	1	1	1
External keyboard (Code 875 012 057)	Pc.	1	1	1
External remote control (Code 875 050 001)	Pc.	–	–	1
Key for the key switch (for reordering 1 key: Code 875 012 058)	Pc.	2	2	2
Operating instructions with calibration certificate	Set	1	1	1
QuickStart guide	Pc.	1	1	1

● = feature included

○ = feature not included

◐ = feature limited included

* = DC welding only

SUITABLE ACCESSORIES (available option):	TECHNICAL DATA	300 CA	300 CA AC/DC	300 CA AVC/OSC
<ul style="list-style-type: none"> • ORBICAR W trolley with integrated liquid cooling • ORBICOL Active compressor cooling device • ORBICAR S trolley • Storage and shipping case • ORBITWIN SW switching device • Remote control with cable • Soft-/Hardware package "CA" • ORBmax residual oxygen meter • Pressure regulator • TIG manual welding torch for ORBITAT 	Code	872 000 010	877 000 001	872 000 020
	Connection voltage	400 - 480 V +/- 10%, 50/60 Hz, 3 phase	400 V +/- 15%, 50/60 Hz, 3 phase	400 - 480 V +/- 10%, 50/60 Hz, 3 phase
	Control range (Connection voltage > 160 V)	5 - 300 A	5 - 300 A	5 - 300 A
	Power-on time	40% at 300 A 60% at 260 A 100% at 220 A	40% at 300 A 60% at 260 A 100% at 220 A	40% at 300 A 60% at 260 A 100% at 220 A
	Dimensions	540 x 420 x 440 mm 21.3" x 16.5" x 17.3"	540 x 420 x 440 mm 21.3" x 16.5" x 17.3"	540 x 420 x 440 mm 21.3" x 16.5" x 17.3"
				

The technical data are not binding. They are not warranted characteristics and are subject to change.

Orbital welding power supplies

ORBIMAT CA

Features, application range, technical data and scope of delivery, see from page 11.

ARTICLE	VERSION	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
ORBIMAT 300 CA	400 - 480 V +/- 10%, 50/60 Hz, 3 phase	872 000 010		33.000	48.000
ORBIMAT 300 CA AC/DC	400 V +/- 15%, 50/60 Hz, 3 phase	877 000 001		41.400	57.000
ORBIMAT 300 CA AVC/OSC	400 - 480 V +/- 10%, 50/60 Hz, 3 phase	872 000 020		37.300	53.000

Suitable accessories (available option):

- ORBICAR W trolley with integrated liquid cooling, see page 14
- ORBICOOL Active compressor cooling device, see page 14
- ORBICAR S trolley, see page 15
- Storage and shipping case, see page 15
- ORBITWIN SW switching device, see page 15
- Remote control with cable, see page 16
- Soft-/Hardware package "CA", see page 16
- ORBmax residual oxygen meter, see page 83
- TIG manual welding torch, see page 88
- Pressure regulator, see page 87
- Power connector adapter set, see page 87



ORBIMAT 300 CA



ORBIMAT 300 CA AC/DC



ORBIMAT 300 CA AVC/OSC



ORBICAR W trolley with integrated liquid cooling

Cooling systems for ORBIMAT

ORBICAR W trolley with integrated liquid cooling

The ORBICAR W trolley is the perfect accessory for the Orbitalum power supplies* due to the integrated liquid cooling. Beside the liquid coolant, the trolley is equipped with a practical holder for gas bottles.

The tank already contains 8 liters (2.11 gal) of the OCL-30 coolant at delivery (see page 17).

TECHNICAL DATA	ORBICAR W TROLLEY
Input voltage	400 V, 50 Hz, 3 phase
Rated power	450 VA
Cooling type	Convection cooling
Liquid tank contents	8 l / 2.11 gal
Water pressure max.	3.1 bar / 45 PSI
Dimensions (lxwxh)	96 x 54 x 113 cm / 37.8" x 21.3" x 44.5"
Dimensions working top (lxwxh)	65 x 38 x 65 cm / 26.6" x 15" x 26.6"

ARTICLE	SUITABLE FOR ORBIMAT	CODE	KG
ORBICAR W 300 trolley	300 CA, 300 CA AC/DC, 300 CB, 300 CA AVC/OSC	884 000 002	58.200
ORBICAR W 165 trolley*	165 CA*, 165 CB*	884 000 004	58.200
ORBICAR W 180 trolley	180 SW	884 000 005	58.200

* ORBIMAT 165 power sources must be retrofitted at the factory

ORBICOOL Active

Very efficient compressor cooling device. Particularly suitable for welding units in series production.

Including:

- Stainless steel housing
- Adjustable digital thermostat with temperature hysteresis
- Low-noise
- Metal filter cell
- Water level indicator
- Pump protection
- Flow rate monitoring in combination with ORBIMAT current sources

The device includes 2 cans, each with 3.5 liters (0.92 gal) of the OCL-30 coolant (see page 17). Suitable for all* ORBIMAT orbital welding power supplies). Not suitable for use in combination with the ORBICAR S trolley.



ORBICOOL Active (front view)



ORBICOOL Active (rear view)

TECHNICAL DATA	ORBICOOL ACTIVE
Coolant capacity (at ambient temp. +32 °C / water +20 °C)	1.025 kW / 1.37 hp
Setting range inlet temperature	18 - 25 °C
Input voltage	230 V, 50 Hz
Connected load (at ambient temp. +42 °C / water +20 °C)	900 W / 1.21 hp
Maximum power consumption (depending on the version)	4.6 A
Tank contents	6 l / 1.59 gal
Water pressure max.	2.2 bar
Pump output	2.3 l/min
Air output	800 m³/h
Sound pressure	65 dB(A)
Cooling type	Compressor cooling
Dimensions (lxwxh)	560 x 475 x 355 mm / 22.0" x 18.7" x 14.0"

ARTICLE	VERSION	CODE	KG
ORBICOOL Active for ORBIMAT 165 CA*	230 V, 50 Hz	889 000 011	42.000
ORBICOOL Active for ORBIMAT 300 CA	230 V, 50 Hz	889 000 012	42.000
ORBICOOL Active for ORBIMAT 180 SW	230 V, 50 Hz	889 000 015	42.000

* ORBIMAT 165 power sources must be retrofitted at the factory

ORBITAL WELDING POWER SUPPLIES & ACCESSORIES

Other accessories for ORBIMAT

Power connector adapter set

See page 87.



Power connector adapter set

ORBITWIN SW switching device

To increase productivity, the switching unit ORBITWIN is available which allows the alternately operation with 2 weld heads on the ORBIMAT.

The previously assigned program is recalled automatically when the start key of the weld head is actuated. The weld head that is not being used is locked and can be prepared for the next welding operation.

Including all connecting cables and hoses.



ORBITWIN SW switching device

ARTICLE	SUITABLE FOR ORBIMAT	CODE		KG
ORBITWIN SW switching device	180 SW, 165 CA*, 300 CA*, 300 CA AC/DC*	853 000 001		
Connector set ORBITWIN SW to ORBIMAT CA	165 CA, 300 CA, 300 CA AC/DC	853 050 010		
Connection extension set 1.1 m (3.6 ft)	180 SW	853 050 011		

* ORBITWIN SW only applicable with ORBIMAT 165 CA, 300 CA and 300 CA AC/DC in combination with the "Connector set ORBITWIN SW to ORBIMAT CA" (sold separately, see table above).

ORBICAR S trolley

The ORBICAR S is a practical trolley with storage shelf and an option of securing a gas cylinder and is the perfect addition to the Orbitalum 165 A and 180 SW orbital welding power sources.

Not suitable for use in combination with the compressor cooling device ORBICOOL Active.



ORBICAR S trolley

TECHNICAL DATA	ORBICAR S TROLLEY
Dimensions (lxwxh)	96 x 54 x 113 cm / 37.8" x 21.3" x 44.5"
Dimensions working top (lxwxh)	65 x 38 x 65 cm / 26.6" x 15" x 26.6"

ARTICLE	CODE		KG
ORBICAR S trolley	884 000 001		19.100

Storage and shipping case

With castors. Protects the power supply during transport. Perfect for the use on construction sites.

ARTICLE	SUITABLE FOR ORBIMAT	CODE		KG
Storage and shipping case 165	165 CA, 165 CB	875 050 002		17.500
Storage and shipping case 300	300 CA, 300 CA AC/DC, 300 CB	874 050 001		20.800
Storage and shipping case 180 SW	180 SW	850 030 020		18.700



Storage and shipping case
165/300



Storage and shipping case
180 SW



Soft-/Hardware package "CA"



CompactFlash Card ORBIMAT CA/CB



Remote control with cable



Bar code/QR code scanner SW

Soft-/Hardware package "CA"

Suitable for all ORBIMAT CA orbital welding power supplies.
For external programming and data documentation, consisting of:

- 1 CompactFlash card for transferring data between the machine and PC.
For storing weld data protocols or for extending the program memory.
Capacity to store over 5.000 welding programs.
- 1 USB card reader for exporting the CompactFlash card on the PC.
- Software ORBIPROG CA. ORBIPROG_CA software allows programs and protocols to be stored on the PC. The parameters of the CA programs can be edited using the software and can be transferred back to CA models and used there after processing. Additionally, programs from C-series machines (e.g. OM 160 C) can be converted to CA format with the help of software. The parameters of the CA programs can be edited using the software and can be transferred back to CA models and used there after processing.

ARTICLE	CODE		KG
Soft-/Hardware package "CA"	875 050 003		0.488

Storage media

For storing weld data protocols or for extending the program memory.
Capacity to store over 5.000 welding programs.

When the software/hardware package "CA" is purchased, **1 CompactFlash Card ORBIMAT CA/CB** is already included in the scope of delivery.

ARTICLE	CODE		KG
CompactFlash Card ORBIMAT CA/CB	875 012 056		0.010
USB stick ORBIMAT SW	850 030 001		

Remote control with cable

Suitable for all ORBIMAT orbital welding power supplies. 1 remote control with cable is already included in the scope of delivery of the ORBIMAT 300 CA AVC/OSC.
The remote control is not required when working with enclosed orbital weld heads.

Remote control including "**Remote control adapter OM CA/CB to OM 180 SW**" (code 850 040 030). This adapter can be retrofitted at any time and allows the connection of older remote control units to the new power supply generation ORBIMAT 180 SW.

ARTICLE	CABLE LENGTH [M]	CABLE LENGTH [INCH]	CODE		KG
Remote control with cable	7.5	24.6	875 050 001		1.350
Remote control adapter OM CA/CB to OM 180 SW (retrofitting)	-	-	850 040 030		0.118

Bar code/QR code scanner SW

Compatible with the ORBIMAT 180 SW.
For welding data documentation or recording.
Rapid scanning in of the parameters stored in the bar code/QR code (e.g. weld seam number, isometry number, welder ID, etc.) into the power supply.

ARTICLE	CODE		KG
Bar code/QR code scanner SW	850 030 005		0.250

ORBITAL WELDING POWER SUPPLIES & ACCESSORIES

Consumables for ORBIMAT

Paper rolls and ribbon cartridges

For integrated system printer. Suitable for all ORBIMAT orbital welding power supplies.

1 paper roll and 1 ribbon cartridge are already included in the scope of delivery of the ORBIMAT orbital welding power supplies.

ARTICLE	CODE		KG
Paper rolls for integrated printer, pack of 3	875 050 017		0.150
Ribbon cartridge for integrated printer CA/SW	875 030 004		0.010
Ribbon cartridge for integrated printer CB	875 030 002		0.020



Paper rolls and ribbon cartridges for integrated printer

OCL-30 coolant

Anti-freeze pre-mix for ORBIMAT power supplies and cooling units to avoid freezing of the cooling liquid. Applicable up to -30 °C (-22 F) outside temperature. Increased service life of components of the cooling system through very high corrosion protection and high pH-value. For even better ignition characteristics due to low conductivity. Clear coolant liquid.

Applicable with ORBICAR W, ORBICOOL Active, ORBIMAT 165 CB, 165 CA and 180 SW.

1 can is already included in the scope of delivery of the ORBIMAT 165 CA and 180 SW orbital welding power supply.

ARTICLE	VERSION	CODE		KG
OCL-30 coolant	Canister with 3.5 l (0.92 fl oz)	850 030 010		3.715



OCL-30 coolant

Hose connection set ORBIMAT

1 hose connection set is already included in the scope of delivery of the ORBIMAT orbital welding power supplies.

Set, consisting of:

- Teflon gas hose
- Ear clamps with insert
- Hose clips 3/8"
- Liquid hose for tank ventilation
- Gas input connector
- Swivel nuts 3/8"
- Hose clips 1/4"
- Swivel nuts 1/4"
- Funnel

ARTICLE	CODE		KG
Hose connection set ORBIMAT	875 030 018		0.445



Hose connection set ORBIMAT

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- Pressure regulator, see page 87
- WS2 tungsten electrodes, see page 87
- TIG manual welding torch for ORBIMAT, see page 88
- Power connector adapter set, see page 87

ORBITAL WELDING POWER SUPPLIES & ACCESSORIES



We care not only about your concerns prior to purchase. Even after the sale has been made you can fully rely on us.

Our products are extremely robust and reliable.

In order to maintain their performance in the long term, you should have the servicing and maintenance work carried out regularly at the recommended intervals.

All servicing and maintenance work is carried out by qualified and motivated employees with the utmost care. They analyze the situation in order to find the optimal solution for the long term.

Competent service is provided through our subsidiaries as well as our worldwide network of authorized partners. These have been selected with great care and trained at regular intervals by our experts so that they always remain up-to-date with regard to our products and technologies.

Why maintenance?

"Prevention is better than cure"

Don't wait until your machine breaks down sooner or later due to a lack of servicing or maintenance work!

Small causes can often engender large effects - and downtimes or malfunctions could have been avoided through timely checking and maintenance.

When did you last have your machinery maintained?
Arrange an appointment with us straight away:



+49 (0) 77 31 792-786



customerservice@itw-ocw.com

Don't forget to fill out the Service Form which can be downloaded at: www.orbitalum.de/en/service.html


Our services:

- Repairs, replacements
- Cost estimates
- Proactive maintenance
- Service training for customers
- Rental machines for bridging repair periods at special terms
- Collection service for machines
- Visual and functional inspection
- Determination and measuring of technical parameters
- Information to customer about maintenance result
- Functional test of the system components
- Cleaning and care work
- Replacement of defined wear parts as well as of defective components
- Implementation of modifications in as far as these serve to technically improve the equipment
- Required adjustment and setting work including calibration and re-acceptance


Your advantages:

- Service directly from the manufacturer or authorized partner
- Reduction of downtimes
- Long-term functioning of your machinery and plants
- Ensuring the availability
- Early recognition of wear avoids unnecessary and costly repairs
- Reduction of the susceptibility to failure
- Value retention of your machinery and plants
- Regular maintenance work ensures reliable and safe machine operation - even after many years
- Higher availability of own service employees

Enclosed orbital weld heads

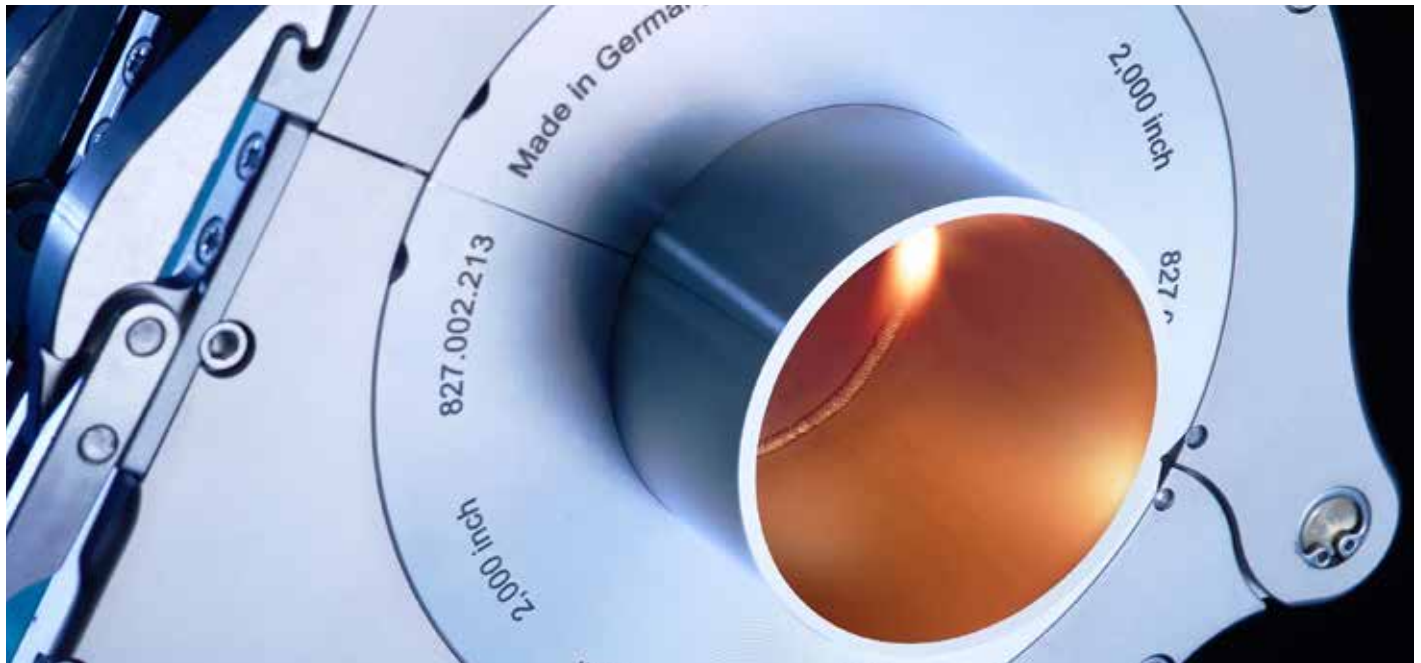

Overview enclosed orbital weld heads

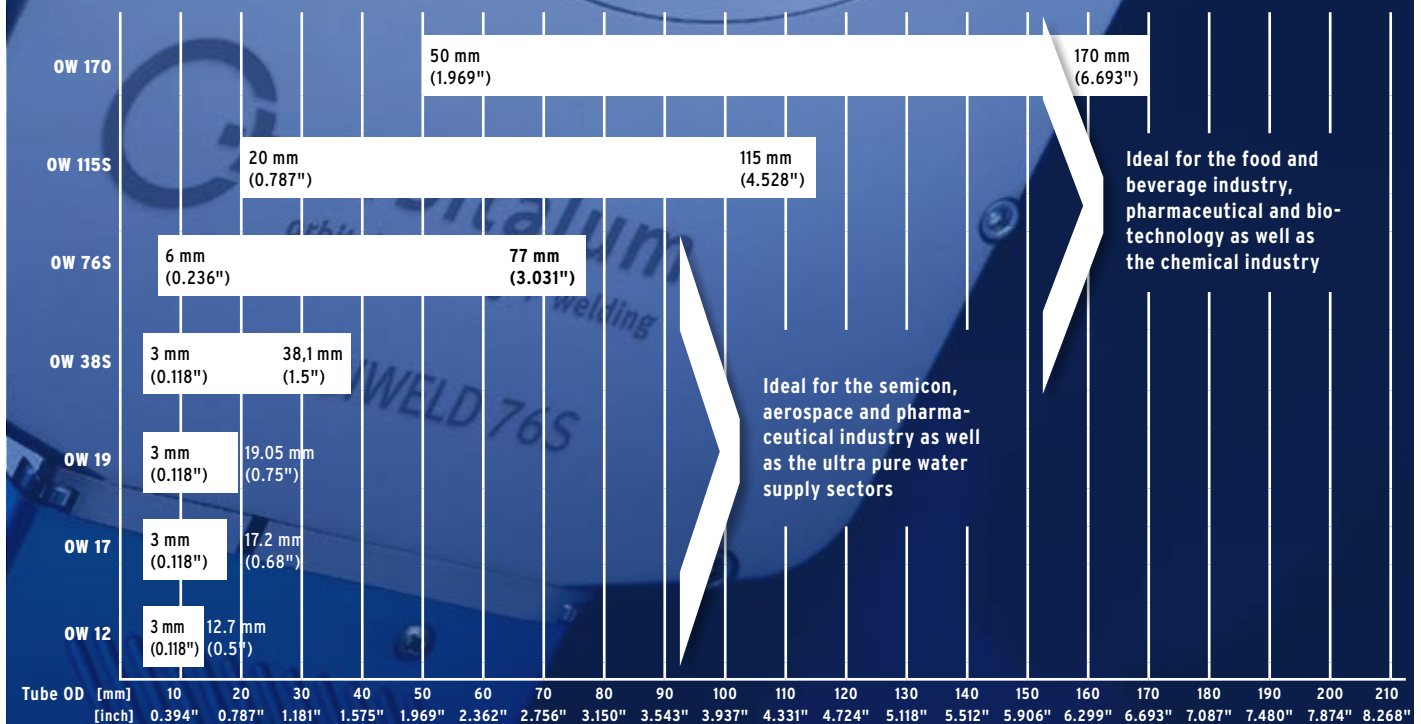

Electrode lengths/diameter for enclosed weld heads

WELD HEAD ►		OW 12		OW 17		OW 19		OW 38S		OW 76S		OW 115S		OW 170	
ROTOR Ø ►		40.0 MM / 1.575"		51.2 MM / 2.016"		55.0 MM / 2.165"		79.0 MM / 3.110"		116.4 MM / 4.583"		180.2 MM / 7.094"		245.6 MM / 9.669"	
TUBE Ø ▼															
[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]	[mm]	[inch]
3.17	0.125	13.90	0.547	19.52	0.768	21.40	0.843	33.40	1.315						
6.00	0.236	12.50	0.492	18.10	0.713	20.00	0.787	32.00	1.260	50.70	1.996				
6.35	0.250	12.30	0.484	17.93	0.706	19.80	0.780	31.80	1.252	50.50	1.988				
8.00	0.315	11.50	0.453	17.10	0.673	19.00	0.748	31.00	1.220	49.70	1.957				
9.53	0.375	10.70	0.421	16.34	0.643	18.20	0.717	30.20	1.189	48.90	1.925				
10.00	0.394	10.50	0.413	16.10	0.634	18.00	0.709	30.00	1.181	48.70	1.917				
10.20	0.402	10.40	0.409	16.00	0.630	17.90	0.705	29.90	1.177	48.60	1.913				
12.00	0.472	9.50	0.374	15.10	0.594	17.00	0.669	29.00	1.142	47.70	1.878				
12.70	0.500	9.20	0.362	14.75	0.581	16.70	0.657	28.60	1.126	47.30	1.862				
13.00	0.512			14.60	0.575	16.50	0.650	28.50	1.122	47.20	1.858				
13.50	0.531			14.35	0.565	16.30	0.642	28.20	1.110	46.90	1.846				
15.88	0.625			13.16	0.518	15.10	0.594	27.00	1.063	45.70	1.799				
16.00	0.630			13.10	0.516	15.00	0.591	27.00	1.063	45.70	1.799				
17.20	0.677			12.50	0.492	14.40	0.567	26.40	1.039	45.10	1.776				
18.00	0.709					14.00	0.551	26.00	1.024	44.70	1.760				
19.00	0.748					13.50	0.531	25.50	1.004	44.20	1.740				
19.05	0.750					13.50	0.531	25.40	1.000	44.20	1.740				
20.00	0.787							25.00	0.984	43.70	1.720	75.60	2.976		
21.30	0.839							24.30	0.957	43.00	1.693	75.00	2.953		
22.00	0.866							24.00	0.945	42.70	1.681	74.60	2.937		
23.00	0.906							23.50	0.925	42.20	1.661	74.10	2.917		
25.40	1.000							22.30	0.878	41.00	1.614	72.90	2.870		
26.90	1.059							21.50	0.846	40.20	1.583	72.20	2.843		
28.00	1.102							21.00	0.827	39.70	1.563	71.60	2.819		
29.00	1.142							20.50	0.807	39.20	1.543	71.10	2.799		
30.00	1.181							20.00	0.787	38.70	1.524	70.60	2.780		
31.75	1.250							19.10	0.752	37.80	1.488	69.70	2.744		
33.70	1.327							18.10	0.713	36.80	1.449	68.80	2.709		
35.00	1.378							17.50	0.689	36.20	1.425	68.10	2.681		
38.10	1.500							15.90	0.626	34.60	1.362	66.60	2.622		
40.00	1.575									33.70	1.327	65.60	2.583		
41.00	1.614									33.20	1.307	65.10	2.563		
42.40	1.669									32.50	1.280	64.40	2.535		
44.50	1.752									31.40	1.236	63.40	2.496		
48.30	1.902									29.50	1.161	61.50	2.421		
50.80	2.000									28.30	1.114	60.20	2.370	92.90	3.657
51.00	2.008									28.20	1.110	60.10	2.366	92.80	3.654
52.00	2.047									27.70	1.091	59.60	2.346	92.30	3.634
53.00	2.087									27.20	1.071	59.10	2.327	91.80	3.614
54.00	2.126									26.70	1.051	58.60	2.307	91.30	3.594
60.30	2.374									23.50	0.925	55.50	2.185	88.20	3.472
63.50	2.500									21.90	0.862	53.90	2.122	86.60	3.409
70.00	2.756									18.70	0.736	50.60	1.992	83.30	3.280
76.10	2.996									15.60	0.614	47.60	1.874	80.30	3.161
76.20	3.000									15.60	0.614	47.50	1.870	80.20	3.157
85.00	3.346											43.10	1.697	75.80	2.984
88.90	3.500											41.20	1.622	73.90	2.909
101.60	4.000											34.80	1.370	67.50	2.657
104.00	4.094											33.60	1.323	66.30	2.610
108.00	4.252											31.60	1.244	64.30	2.531
114.30	4.500											28.50	1.122	61.20	2.409
127.00	5.000													54.80	2.157
129.00	5.079													53.80	2.118
139.70	5.500													48.50	1.909
152.40	6.000													42.10	1.657
154.00	6.063													41.30	1.626
163.00	6.417													36.80	1.449
165.10	6.500													35.80	1.409
168.30	6.626													34.20	1.346

FORMULA:

Electrode length =

$$\frac{\text{Rotor } \varnothing - \text{Tube } \varnothing}{2} - \text{Electrode interval (generally 1.5 mm)} - 3$$

ORBIWELD 12

Compact TIG weld head
- ideal for tight spaces

Micro weld head

It doesn't get any smaller or more effective than this: Thanks to its extremely narrow construction the OW 12 offers a unique diversity of functions as well as a high duty cycle previously unknown in weld heads of this size through its liquid cooling. This micro weld head is a compact space-saving marvel and guarantees continually reproducible, high-quality weld seams, even with high currents. Particularly suitable for welding all common microfittings!

Small-sized modules – base machine, clamping cartridges and clamping inserts – specially for applications in very tight spaces



Extremely narrow design and yet highly durable thanks to intensive liquid cooling system



Removable clamping cartridges for exact aligning of the parts to be welded



The OW 12 with its small-sized modules – basic machine, clamping cartridges and clamping inserts – is the ideal tool for work under tight spaces such as the semiconductor industry, aerospace, pharmaceutical industry as well as the ultra pure water supply sectors.

All the important commands for welding can be transmitted to the power supply via a control panel built into the robust and durable aluminum handle, so that no additional remote control is required.

The removable clamping cartridge enables accurate alignment with the parts to be welded, even where there is very little space.

ADDITIONAL FEATURES:

- Toolless quick change system for clamping cartridges and clamping inserts
- Wide clamping cartridge (Type "B") with exchangeable clamping shells for standard applications
- Extremely narrow clamping cartridges (Type "A") for welding microfittings and for other applications with very limited clamping lengths
- The head is 5.7 kg (12.6 lbs) light. All connections for electricity, gas and cooling water are firmly integrated in the OW 12
- To increase productivity, the optional ORBITWIN switching unit allows working with up to two heads in an alternating fashion, thus reducing conversion times and downtimes considerably
- Including highly flexible hose package (length: 7.5 m/24.6 ft) with strain relief to the power source – optionally extendable to up to 20.0 m (64 ft)

The success model OW 12 has been optimized even further!

The result: A well-engineered weld head with unequalled robustness, high ease of use and even higher performance, for example through:

- ✓ Higher temperature stability
- ✓ Improved ignition characteristics
- ✓ Optimized rotor guidance
- ✓ Optimized weld gas control
- ✓ Liquid-cooled
- ✓ Integrated control panel
- ✓ 7.5 m (24.6 ft) hose package



Robust and stable aluminum handle with integrated control panel



Quick change system for clamping shells



Particularly suitable for welding all common microfittings



Diameter-specific clamping cartridges - available separately



Aluminum clamping inserts for OW 12, type "B" (wide) - available separately



Comprehensive range of accessories, e.g. ORBmax residual oxygen meter

POSSIBLE APPLICATIONS OW 12:	MICROFITTING-TO-MICROFITTING	MICROFITTING-TO-TUBE	TUBE-TO-TUBE	ADVANTAGES
Clamping cartridges, type "A" (narrow)	x	x	x	High flexibility thanks to narrow design
Clamping cartridges, type "B" (wide)			x	Low cost due to exchangeable clamping inserts

APPLICATION RANGE	ORBIWELD 12
Code	821 000 010
Tube OD, min. - max.	3.0 - 12.7 mm 0.118" - 0.500"
Electrode Ø	1.0 mm 0.039"
Machine weight including hose package	4.8 kg 10.6 lbs
Hose package length	7.5 m 24.6 ft
SCOPE OF DELIVERY	
Including:	<ul style="list-style-type: none"> • 1 Micro weld head ORBIWELD 12 • 1 Durable storage and shipping case • 1 Tool set • 1 Power connector adapter • 1 Feeler gauge • 1 Operating instructions and spare parts list
Suitable accessories (available option):	<ul style="list-style-type: none"> • Clamping cartridges for OW 12, type "A" (narrow) • Clamping cartridge for OW 12, type "B" (wide) • Clamping inserts for OW 12, type "B" (wide) • ESG tungsten grinders • ORBmax residual oxygen meter • ORBIPURGE forming set • Hose package extensions • WS2 tungsten electrodes


DIMENSIONS ORBIWELD 12	DIMENSION		ELECTRODE INTERVAL			
			CARTRIDGE TYPE "A"		CARTRIDGE TYPE "B"	
	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]
Dimension "A1"	4.25	0.167	6.35	0.250	15.60	0.614
Dimension "A2"	3.75	0.148	5.85	0.230	15.10	0.594
Dimension "B"	8.00	0.315	12.20	0.480	30.70	1.209
Dimension "C"	245.70	9.673				
Dimension "D"	90.00	3.543				
Dimension "E"	53.00	2.087				
Dimension "F"	25.50	1.004				
Dimension "G"	27.50	1.083				
Dimension "H"	20.00	0.787				
Dimension "I"	22.00	0.866				
Dimension "J"	73.00	2.874				
Dimension "K"	60.00	2.362				



ORBIWELD 12
with narrow clamping cartridge
(type "A")



ORBIWELD 12
with wide clamping cartridge
(type "B")

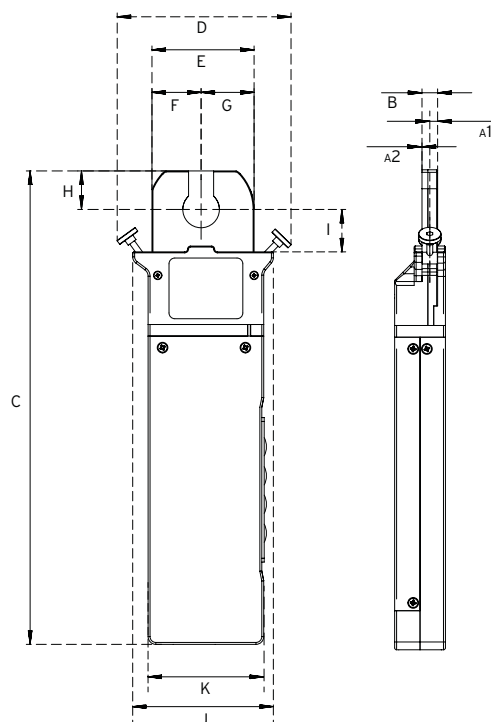

The technical data are not binding. They are not warranted characteristics and are subject to change.

Micro weld head OW

ORBIWELD 12

Features, application range, technical data and scope of delivery, see page 21.

Clamping cartridges and clamping inserts are not included in the scope of delivery (see from page 23).

ARTICLE	CODE		WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Micro weld head OW 12	821 000 010		4.800	11.000

* Machine weight including hose package

Suitable accessories (available option):

- Clamping cartridges for OW 12, type "A" (narrow), see page 23
- Clamping cartridge for OW 12, type "B" (wide), see page 23
- Clamping inserts for OW 12, type "B" (wide), see page 24
- Power connector adapter set, see page 87

Clamping cartridges for OW 12, type "A" (narrow)

Made from stainless steel with flip-up weld head cover "FlipCover" which enables to test and/or to readjust the electrode position before the welding procedure. Clamping cartridges with a total width of only 12.2 mm (0.48") can be supplied for welding of microfittings and other applications with very limited clamping lengths (Type "A").

For type "A" a separate clamping cartridge is required for each tube diameter.

ARTICLE	TUBE OD [MM]	TUBE OD [INCH]	CODE		KG
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	2.00	0.079	821 050 200		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	3.00	0.118	821 050 201		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	3.18	0.125	821 050 202		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	6.00	0.236	821 050 203		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	6.35	0.250	821 050 204		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	8.00	0.315	821 050 205		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	9.53	0.375	821 050 206		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	10.00	0.394	821 050 207		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	12.00	0.472	821 050 208		0.100
Clamping cartridge VA for OW 12, Type "A" (narrow), V3	12.70	0.500	821 050 209		0.100

Clamping cartridge for OW 12, type "B" (wide)

When using the clamping cartridges, type "B", one set of clamping inserts is required in addition for each tube diameter.

ARTICLE	CODE		KG
Clamping cartridge for OW 12, type "B" (wide)	821 050 002		0.095

ENCLOSED ORBITAL WELD HEADS



ORBIWELD 12 with narrow clamping cartridge (type "A")



ORBIWELD 12 with wide clamping cartridge (type "B")



Clamping cartridges for OW 12, type "A" (narrow)



Clamping cartridge for OW 12, type "B" (wide)



Clamping inserts for OW 12, type "B" (wide), 4 pcs.

Clamping inserts for OW 12, type "B" (wide)

Made of aluminum.

Can only be used in connection with the clamping cartridges, type "B".

One set of clamping inserts consists of 4 individual parts (2 inserts each side).

ARTICLE	TUBE OD [MM]	TUBE OD [INCH]	CODE		KG
Clamping insert for OW 12, type "B" (wide), 4 pcs.	3.00	0.118	821 002 220		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	3.18	0.125	821 002 222		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	4.00	0.157	821 002 224		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	6.00	0.236	821 002 228		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	6.35	0.250	821 002 229		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	7.00	0.276	821 002 230		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	7.94	0.313	821 002 232		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	8.00	0.315	821 002 233		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	9.00	0.354	821 002 234		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	9.53	0.375	821 002 235		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	10.00	0.394	821 002 237		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	12.00	0.472	821 002 243		0.050
Clamping insert for OW 12, type "B" (wide), 4 pcs.	12.70	0.500	821 002 245		0.050

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- Hose package extensions, see page 86
- WS2 tungsten electrodes, see page 87
- Power connector adapter set, see page 87

ORBIWELD 17

Extremely short production cycles

thanks to integrated control elements
and active cooling

Micro weld head

Active-cooled orbital weld head for tubes in semi-conductor production:

With its removable clamping cartridge, integrated control elements and active cooling, the ORBIWELD 17 - or OW 17, for short - clearly stands out in comparison to conventional systems from the competition. This makes it possible to weld thin tubes like those used in semi-conductor production easily, quickly, reliably and - above all - with high quality.



Compatibility with market standards enables trouble-free transitioning to the latest Orbitalum technology



An extremely slim design for use in confined spaces, such as in the semi-conductor industry



Removable clamping cartridges specifically for inline assembly or prefab production of modules



For small tube diameters
3.0 mm to 17.2 mm
(0.118" - 0.677")



COAX tube systems can be welded
with wall thicknesses up to
1.62 mm (0.064")



Highly resilient thanks to their
integrated active liquid cooling



Integrated control panel for
operation of the power source



Following intensive research, this orbital weld head was improved in comparison to commonly available weld heads in crucial areas so as to optimize handling, welding results and production times.

As the OW 17 is compatible with the current market standard, users can easily switch over to the new technology.

The orbital weld head is specially designed for small tube diameters from 3.0 mm to 17.2 mm (0.118" - 0.677") and wall thicknesses up to 1.62 mm (0.064") like those used in production systems from the semi-conductor industry.

The OW 17 features a removable clamping cartridge which can be very easily positioned around the tubes to be welded in inline assembly at the construction site or prefab production of modules in the workshop.

Thanks to its compact, handy design, it can be neatly positioned and perfectly aligned to the weld point, thus enabling use in confined spaces.

When the cartridge is in place, the weld head is inserted and secured in the cartridge and welding can begin. The operating elements required for starting, stopping, gas flow and electrode changes are integrated in the handle of the head. An LED informs the welder of the operating conditions, like readiness to weld and the active process. During installation work, a second operator is not required at the welding power supply, which may not be located nearby.

Integrated active liquid cooling protects the OW 17 head from overheating and enables a long operating duration and therefore shorter work cycles.

The head of the OW 17 is designed for 1.0 mm (0.039") and 1.6 mm (0.063") electrodes and thus ensures a consistently high electrode service life when welding thicker walls. This orbital weld head can also be used with COAX tube systems, for example. This saves the user a second orbital weld head.

The included adjustable electrode distance gage makes it easier for the operator to set up the electrode; an insertion gage which is permanently attached to the cartridge and thus cannot be lost ensures precise positioning to the tube joint to be welded.



Rugged, compact and handy design.



Integrated control panel enables all commands crucial for welding to be sent to the power source, making any other remote control unnecessary.




An insertion gage which is permanently attached to the clamping cartridge and thus cannot be lost ensures precise positioning of the tube joint to be welded.



Compatibility with market standards enables trouble-free transitioning to the latest Orbitalum technology.



Removable clamping cartridge, which is ideal for inline assembly at the construction site or prefabrication of modules in the workshop.




An extremely slim design for use in confined spaces, such as in the semiconductor industry.

APPLICATION RANGE	ORBIWELD 17
Code	817 000 001
Tube OD, min. - max.	3.0 - 17.2 mm 0.118" - 0.677"
Electrode Ø	1.0 / 1.6 mm 0.039" / 0.063"
Machine weight including hose package	5.5 kg 12.1 lbs
Hose package length	7.5 m 24.6 ft
SCOPE OF DELIVERY	
Including:	<ul style="list-style-type: none"> • 1 Micro weld head ORBIWELD 17 • 1 Durable storage and shipping case • 1 Tool set • 1 Safety clamp hose assembly • 1 Power connector adapter • 1 Electrode distance gage • 1 Operating instructions and spare parts list
Suitable accessories (available option):	<ul style="list-style-type: none"> • Clamping cartridge for OW 17 • Clamping inserts for OW 17 • ESG tungsten grinders • ORBmax residual oxygen meter • ORBIPURGE forming set • Hose package extensions • WS2 tungsten electrodes



DIMENSIONS	ORBIWELD 17	
	DIMENSION	
	[MM]	[INCH]
Dimension "A"	70.00	2.756
Dimension "B"	61.00	2.402
Dimension "C"	144.50	5.689
Dimension "D"	130.00	5.118
Dimension "E"	162.00	6.378
Dimension "F"	53.00	2.087
Dimension "G"	12.40	0.488
Dimension "H"	60.25	2.372
Dimension "I"	5.00	0.120
Dimension "J"	26.80	1.055
Dimension "K"	75.20	2.961

The technical data are not binding. They are not warranted characteristics and are subject to change.

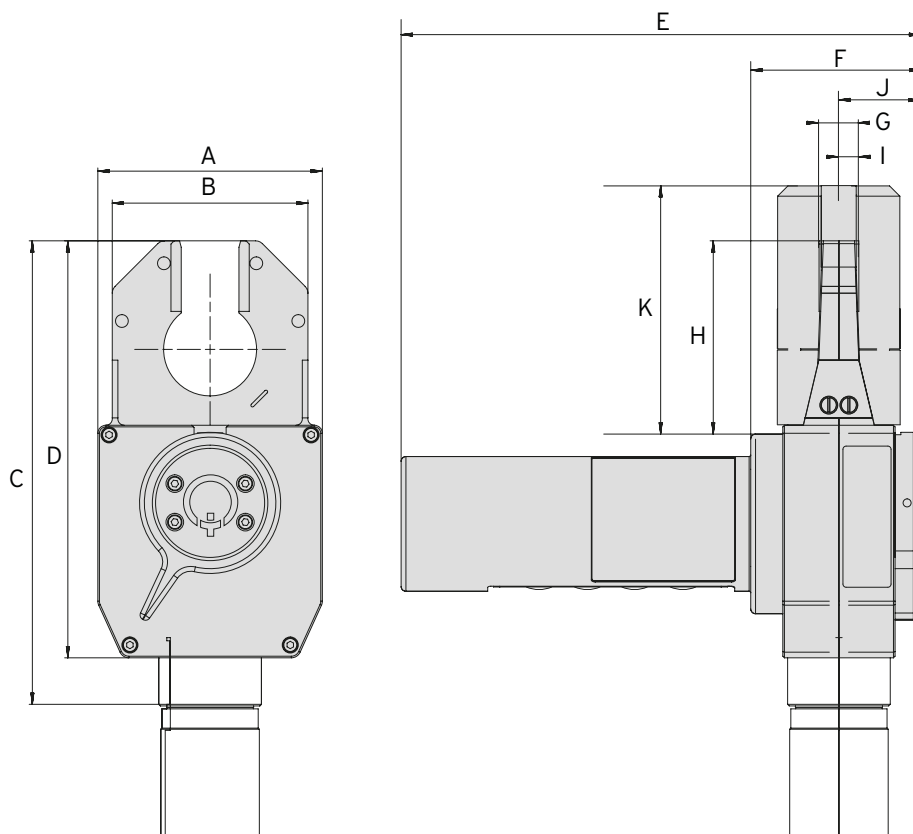

Micro weld head OW

ORBIWELD 17

Features, application range, technical data and scope of delivery, see page 25.

Clamping cartridge and clamping inserts are not included in the scope of delivery.

ARTICLE	CODE	WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Micro weld head OW 17	817 000 001	5.500	13.900

* Machine weight including hose package



ORBIWELD 17

Clamping cartridge for OW 17

Stainless steel. Removable clamping cartridge specifically for inline assembly or prefab production of modules. For the mounting of clamping inserts. An insertion gage which is permanently attached to the cartridge and thus cannot be lost ensures precise positioning to the tube joint to be welded. The clamping cartridges are supplied in a rugged, lockable plastic box.

Scope of delivery:


- 1 x insertion gage for standard applications
- 1 x insertion gage for COAX applications
- 1 x 3/32" hexagon wrench
- 1 x 1/16" hexagon wrench
- 1 x plastic box

Suitable clamping inserts for different tube diameters must be ordered separately.



Clamping cartridge for OW 17
(clamping inserts are not included in the scope of delivery)

DIMENSIONS	[MM]	[INCH]
Dimension "A"	63.00	2.480
Dimension "B"	57.20	2.252
Dimension "C"	90.00	3.543
Dimension "D"	74.60	2.937
Dimension "E"	50.90	2.004
Dimension "F"	53.60	2.110
Dimension "G"	38.10	1.500
Dimension "H"	72.60	2.858
Dimension "I"	70.00	2.756
Dimension "J"	19.05	0.750

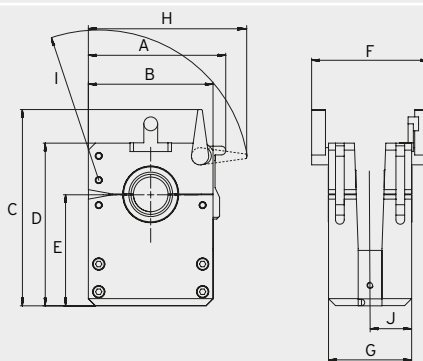

ARTICLE	CODE	KG
Clamping cartridge for OW 17	817 050 010	

ENCLOSED ORBITAL WELD HEADS



Clamping inserts for OW 17

Clamping inserts for OW 17

Stainless steel. Can only be used if the OW 17 clamping cartridge is used.

1 clamping insert is comprised of 2 half shells.

1 clamping insert (= 2 half shells) is required for each clamping side of the clamping cartridge.

This means that 2 clamping inserts (= 4 half shells) must be used for each clamping cartridge.

In the case of COAX connections, 2 tubes with different tube diameters are usually welded together, e.g. a tube with a 12.7 mm (1/2") dia. and a tube with a 15.88 mm (5/8") dia. In applications like this, 2 clamping inserts with correspondingly different tube diameters must be used.

Other dimensions available on request.

VERSION	TUBE OD [MM]	TUBE OD [INCH]	CODE		KG
Inch sizes	3.18	0.125	817 002 201		
Inch sizes	4.76	0.188	817 002 202		
Inch sizes	6.35	0.250	817 002 203		
Inch sizes	7.94	0.313	817 002 204		
Inch sizes	9.53	0.375	817 002 205		
Inch sizes	12.70	0.500	817 002 206		
Inch sizes	14.29	0.563	817 002 207		
Inch sizes	15.88	0.625	817 002 208		
Metric sizes	3.00	0.118	817 002 209		
Metric sizes	4.00	0.157	817 002 210		
Metric sizes	5.00	0.196	817 002 211		
Metric sizes	6.00	0.236	817 002 212		
Metric sizes	8.00	0.314	817 002 213		
Metric sizes	9.00	0.354	817 002 214		
Metric sizes	10.00	0.393	817 002 215		
Metric sizes	11.00	0.433	817 002 216		
Metric sizes	12.00	0.472	817 002 217		
Metric sizes	14.00	0.551	817 002 218		
Metric sizes	15.00	0.590	817 002 219		
Metric sizes	16.00	0.629	817 002 220		
Metric sizes	17.20	0.677	817 002 221		

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- Hose package extensions, see page 86
- WS2 tungsten electrodes, see page 87
- Power connector adapter set, see page 87

ENCLOSED ORBITAL WELD HEADS

ORBIWELD 19

Micro weld head
with additional advantages

Micro weld head

Small, robust and efficient: The OW 19 is the perfect tool when the task involves connections of ultra-high-purity tubes and high-performance tubes, such as are used for example in the semiconductor industry or applications in branches in which high purity and maximum performance are imperative. Even under extremely difficult conditions and in tight spaces the OW 19 produces excellent and reliable quality!


Can be used in all positions, irrespective of whether the tubes to be connected are positioned horizontally, vertically or inclined



Three-part clamping mechanism - no parts project beyond the head outline even in the opened position



Outstanding range of applications - particularly in the semiconductor industry, aerospace technology, pharmaceuticals and supply of high-purity water

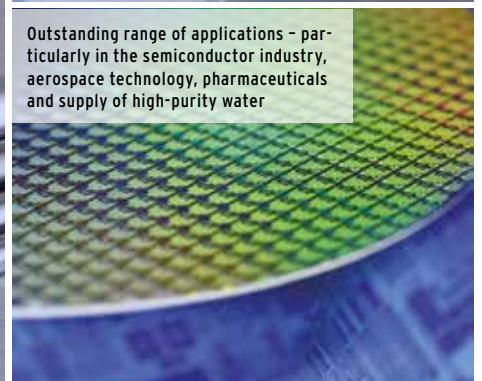

Its extremely high endurance thanks to the intensive liquid cooling as well as its high-quality robust construction are characteristics which distinguish this micro weld head.

The 3-part clamping mechanism ensures that the head can be clamped in the most confined spaces, as even when open no parts protrude beyond the contour of the head. Equally, an exact alignment, with no misalignment is guaranteed with the parts to be welded.

All the important commands for welding can be transmitted to the power supply via a control panel built into the robust and durable aluminum handle, so that no additional remote control is required.

All orbital welding power sources from Orbitalum automatically detect the head and its properties so that the operator only has to call up his or her specified jointing program and start the joining process before beginning to weld.

The matching clamping inserts are available in narrow and broad versions and can be inserted into the weld head with just a few simple steps.

The head is 7.5 kg (16.5 lbs) light. All connections for electricity, gas, cooling water are firmly integrated in the OW 19.

To increase productivity, the optional ORBITWIN switching unit allows working with up to two heads in an alternating fashion, thus reducing conversion times and downtimes considerably.

Including highly flexible hose package (length: 7.5 m/24.6 ft) with strain relief to the power source - optionally extendable to up to 20.0 m (64 ft).

The OW 19 - with many additional advantages:


- ✓ Optimized scissors clamping system
- ✓ Flip-up weld head cover "FlipCover"
- ✓ Optimized weld gas control
- ✓ One-hand operation
- ✓ Completely liquid-cooled
- ✓ Integrated control panel
- ✓ 7.5 m (24.6 ft) hose package



Robust and stable aluminum handle with integrated control panel



Practical clamping locks allowing single-hand operation



Simpler inserting of the electrodes by markings for Ø 1.0/1.6 mm (0.039"/0.063")



Flip-up weld head cover "FlipCover"




Diameter-specific clamping inserts (each 6-parts, wide and narrow) available separately



Comprehensive range of accessories, e.g. ORBIPURGE forming set

APPLICATION RANGE		ORBIWELD 19
Code		822 000 010
Tube OD, min. - max.		3.0 - 19.05 mm 0.118" - 0.750"
Electrode Ø		1.0 / 1.6 mm 0.039" / 0.063"
Machine weight including hose package		6.5 kg 14.3 lbs
Hose package length		7.5 m 24.6 ft
SCOPE OF DELIVERY		
Including:	<ul style="list-style-type: none"> • 1 Micro weld head ORBIWELD 19 • 1 Durable storage and shipping case • 1 Tool set • 1 Power connector adapter • 1 Feeler gauge • 1 Operating instructions and spare parts list 	
Suitable accessories (available option):	<ul style="list-style-type: none"> • Clamping inserts for OW 19 • ESG tungsten grinders • ORBmax residual oxygen meter • ORBIPURGE forming set • Hose package extensions • WS2 tungsten electrodes 	

DIMENSIONS			ELECTRODE INTERVAL			
ORBIWELD 19	DIMENSION		CLAMPING INSERT TYPE "S"		CLAMPING INSERT TYPE "W"	
	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]
Dimension "A1"	12.00	0.472	12.00	0.472		
Dimension "A2"	17.00	0.669			17.00	0.669
Dimension "B1"	24.00	0.945	24.00	0.945		
Dimension "B2"	34.00	1.339			34.00	1.339
Dimension "C"	66.50	2.618				
Dimension "D"	33.25	1.309				
Dimension "E"	35.20	1.386				
Dimension "F"	44.50	1.752				
Dimension "G"	313.50	12.343				
Dimension "H"	76.00	2.992				
Dimension "I"	34.00	1.339				
Dimension "J"	35.00	1.378				
Dimension "K"	71.00	2.795				

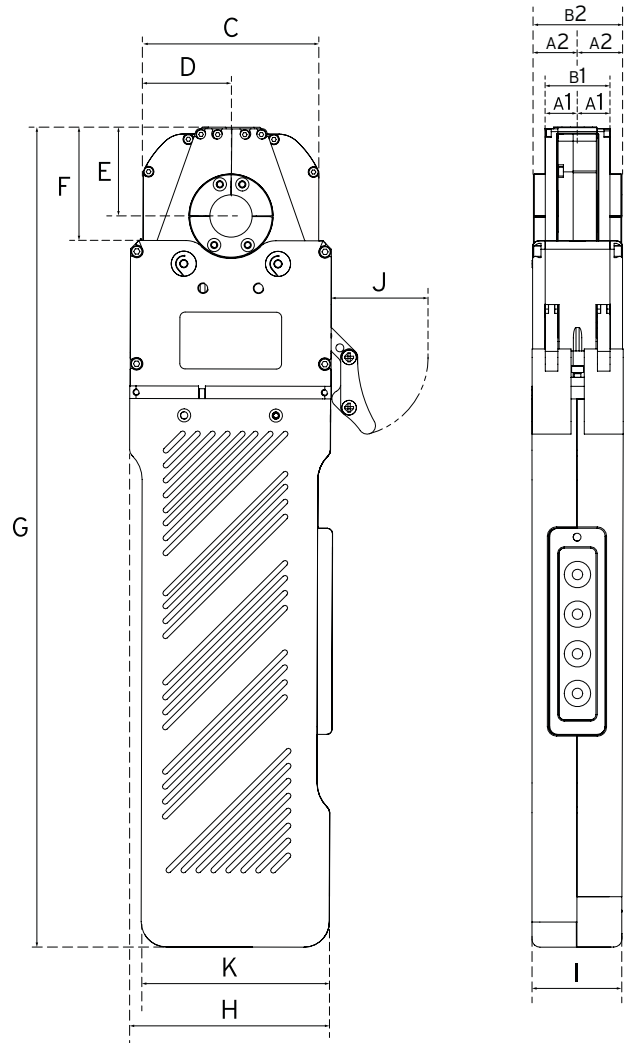

The technical data are not binding. They are not warranted characteristics and are subject to change.



Micro weld head OW

ORBIWELD 19

Features, application range, technical data and scope of delivery, see page 29.

Clamping cartridges and clamping inserts are not included in the scope of delivery (see from page 23).



ORBIWELD 19

ARTICLE	CODE		WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Micro weld head OW 19	822 000 010		6.500	14.800

* Machine weight including hose package

Suitable accessories (available option):

- Clamping inserts for OW 19, see page 32
- Power connector adapter set, see page 87

ENCLOSED ORBITAL WELD HEADS



Clamping insert for OW 19 "W" (wide) 6 pcs.



Clamping insert for OW 19 "S" (small) 6 pcs.

Clamping inserts for OW 19

One set of clamping inserts consists of 6 individual parts (3 inserts each side).

Type "W" (wide) for standard applications.

Type "S" (small) for applications in extremely conditions with low clearances.

ARTICLE	TUBE OD [MM]	TUBE OD [INCH]	TYPE "W" (WIDE)		TYPE "S" (SMALL)	
			CODE	KG	CODE	KG
Clamping insert for OW 19, 6 pcs.	3.00	0.118	822 002 120	0.100	822 002 320	0.044
Clamping insert for OW 19, 6 pcs.	3.18	0.125	822 002 122	0.100	822 002 322	0.044
Clamping insert for OW 19, 6 pcs.	3.95	0.156	822 002 123	0.099	822 002 323	0.044
Clamping insert for OW 19, 6 pcs.	4.00	0.157	822 002 124	0.099	822 002 324	0.044
Clamping insert for OW 19, 6 pcs.	4.78	0.188	822 002 126	0.099	822 002 326	0.043
Clamping insert for OW 19, 6 pcs.	5.95	0.234	822 002 127	0.097	-	-
Clamping insert for OW 19, 6 pcs.	6.00	0.236	822 002 128	0.097	822 002 328	0.043
Clamping insert for OW 19, 6 pcs.	6.35	0.250	822 002 129	0.097	822 002 329	0.043
Clamping insert for OW 19, 6 pcs.	7.00	0.276	822 002 130	0.096	-	-
Clamping insert for OW 19, 6 pcs.	7.94	0.313	822 002 132	0.094	-	-
Clamping insert for OW 19, 6 pcs.	8.00	0.315	822 002 133	0.094	822 002 333	0.042
Clamping insert for OW 19, 6 pcs.	9.00	0.354	822 002 134	0.092	822 002 334	0.041
Clamping insert for OW 19, 6 pcs.	9.53	0.375	822 002 135	0.091	822 002 335	0.040
Clamping insert for OW 19, 6 pcs.	9.95	0.392	822 002 136	0.090	822 002 336	0.040
Clamping insert for OW 19, 6 pcs.	10.00	0.394	822 002 137	0.090	822 002 337	0.040
Clamping insert for OW 19, 6 pcs.	12.00	0.472	822 002 143	0.083	822 002 343	0.038
Clamping insert for OW 19, 6 pcs.	12.10	0.476	-	-	822 002 344	0.038
Clamping insert for OW 19, 6 pcs.	12.70	0.500	822 002 145	0.081	822 002 345	0.037
Clamping insert for OW 19, 6 pcs.	13.00	0.512	822 002 146	0.080	-	-
Clamping insert for OW 19, 6 pcs.	13.50	0.531	822 002 148	0.078	822 002 348	0.036
Clamping insert for OW 19, 6 pcs.	14.00	0.551	822 002 150	0.076	822 002 350	0.035
Clamping insert for OW 19, 6 pcs.	15.00	0.591	822 002 153	0.071	822 002 353	0.034
Clamping insert for OW 19, 6 pcs.	15.30	0.602	-	-	822 002 354	0.033
Clamping insert for OW 19, 6 pcs.	15.88	0.625	822 002 157	0.066	822 002 357	0.032
Clamping insert for OW 19, 6 pcs.	16.00	0.630	822 002 158	0.066	822 002 358	0.032
Clamping insert for OW 19, 6 pcs.	17.20	0.677	822 002 162	0.058	-	-
Clamping insert for OW 19, 6 pcs.	17.30	0.681	822 002 163	0.058	822 002 363	0.030
Clamping insert for OW 19, 6 pcs.	18.00	0.709	822 002 164	0.053	822 002 364	0.029
Clamping insert for OW 19, 6 pcs.	19.00	0.748	822 002 165	0.044	822 002 365	0.027
Clamping insert for OW 19, 6 pcs.	19.05	0.750	822 002 166	0.044	822 002 366	0.027


Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- Hose package extensions, see page 86
- WS2 tungsten electrodes, see page 87
- Power connector adapter set, see page 87

ORBIWELD 38S, 76S, 115S

Enclosed orbital weld heads

Easier to handle, more economical, more effective - enclosed TIG orbital welding heads with outstanding characteristics: The ORBIWELD "S" series from Orbitalum convinces by its extremely narrow design and high durability by its efficient integrated liquid cooling system.

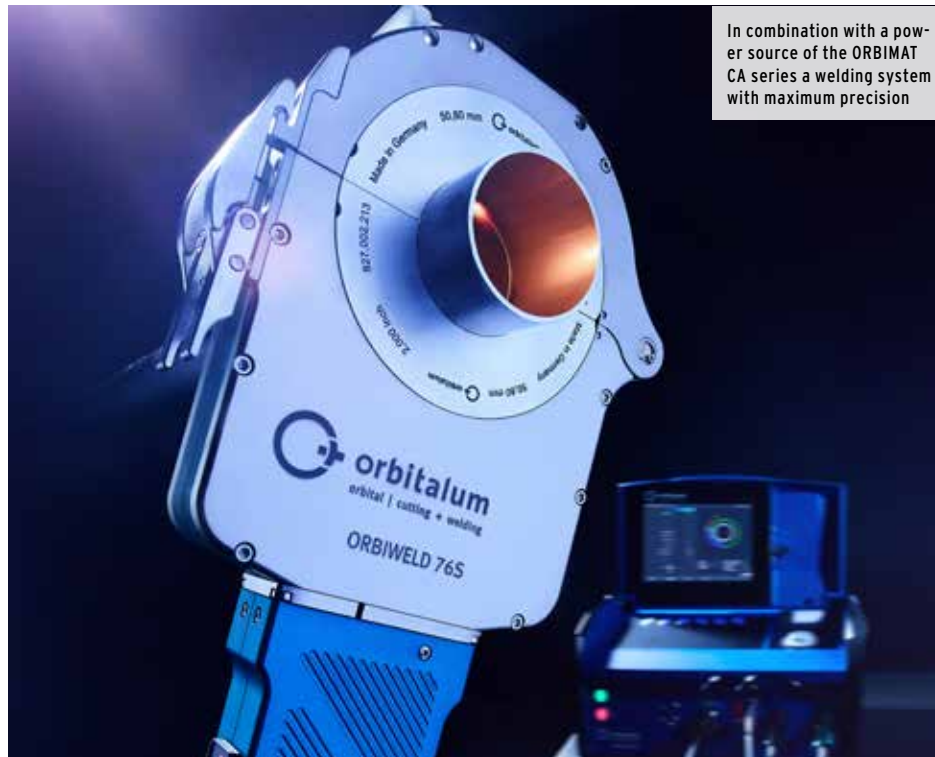

The small dimensions of the ORBIWELD "S" series make it ideal for applications where space is very restricted, such as the pharmaceutical and chemical industry, the semiconductor, food and beverage industry as well as aerospace.

All enclosed orbital weld heads of the ORBIWELD series are made from strong, durable materials of the finest quality and are characterised by their unique liquid cooling system.

The appropriate high-grade, functional and long-lasting clamping inserts are lasting longer than the inserts of many competitors. The inserts are available in small and wide design and easily and quickly insertable into the weld heads.

ADDITIONAL FEATURES:

- Thanks to the extremely narrow design, parts with short straight welding lengths can also be processed
- High-quality, rugged housing and handle parts
- High durability due to completely liquid-cooled weld head housing
- Highly flexible hose package (Length: 7.5 m / 24.6 ft) with strain relief to the power supply
- All the important commands for welding can be transmitted to the power supply via a control panel built into the robust and durable aluminum handle, so that no additional remote control is required
- Quick change system for clamping inserts that engages and releases smoothly without any tools

- Cost-effective clamping inserts
- Durable clamping connections in combination with clamping inserts available for all tube dimensions guarantee that the parts to be welded are clamped securely without misalignment
- Comprehensive and customer-specific range of accessories
- A folding cover at the weld head enables to test and/or to readjust the electrode position before the welding procedure




Robust and stable aluminum handle with integrated control panel



Simpler inserting of the electrodes by markings for Ø 1.6/2.4 mm (0.063"/0.094")



Flip-up weld head cover "FlipCover"



Durable clamping connections



Diameter-specific clamping inserts (each of 2 half-shells) aluminum available separately




Comprehensive range of accessories, e.g. table mounts

DIMENSIONS	ORBIWELD 38S				ORBIWELD 76S				ORBIWELD 115S					
	DIMENSION		ELECTRODE INTERVAL CLAMPING INSERT*		DIMENSION		ELECTRODE INTERVAL CLAMPING INSERT*		DIMENSION		ELECTRODE INTERVAL			
	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]	CLAMPING INSERT* TYPE "S"	CLAMPING INSERT* TYPE "W"		
Dimension "A1"	17.00	0.669	17.50	0.689	19.00	0.748	19.00	0.748	22.75	0.896	25.00	0.984	45.75	1.801
Dimension "A2"	17.00	0.669	17.50	0.689	19.00	0.748	19.00	0.748	21.25	0.837	25.00	0.984	44.25	1.742
Dimension "B"	34.00	1.339	35.00	1.378	38.00	1.496	38.00	1.496	44.00	1.732	50.00	1.969	90.00	3.543
Dimension "C"	112.00	4.409			159.00	6.260			220.00	8.661				
Dimension "D"	47.50	1.870			67.50	2.657			104.00	4.094				
Dimension "E"	47.00	1.850			66.00	2.598			102.00	4.016				
Dimension "F"	144.00	5.669			187.00	7.362			244.00	9.606				
Dimension "G"	357.00	14.055			400.00	15.748			480.00	18.898				
Dimension "H"	95.00	3.740			135.00	5.315			208.00	8.189				
Dimension "I"	34.00	1.339			34.00	1.339			44.00	1.732				
Dimension "J"	55.00	2.165			55.00	2.165			55.00	2.165				
Dimension "K"	71.00	2.795			71.00	2.795			102.00	4.016				
Dimension "L"	110.00	4.331			153.00	6.024			216.00	8.504				

* 2 pairs

APPLICATION RANGE	ORBIWELD 38S	ORBIWELD 76S	ORBIWELD 115S
Code	826 000 001	827 000 001	828 000 001
Tube OD, min. - max.	3 - 38.1 mm 1/8" - 1.5"	6 - 77 mm 1/4" - 3.0"	20 - 115 mm 3/4" - 4.5"
Electrode Ø	1.6/2.4 mm .063"/.094"	1.6/2.4 mm .063"/.094"	1.6/2.4 mm .063"/.094"
Machine weight including hose package	6.9 kg 15.2 lbs	7.5 kg 16.5 lbs	9.7 kg 21.4 lbs
Hose package length	7.5 m / 24.6 ft	7.5 m / 24.6 ft	7.5 m / 24.6 ft
SCOPE OF DELIVERY			
Including:	<ul style="list-style-type: none"> • 1 Enclosed orbital weld head OW 38S, OW 76S or OW 115S • 1 Durable storage and shipping case • 1 Tool set • 1 Power connector adapter • 1 Feeler gauge • 1 Operating instructions and spare parts list 		
Suitable accessories (available option):	<ul style="list-style-type: none"> • Clamping inserts, small and wide • Cavity inserts for moldings • Inserts for elbow welding • T-piece clamping inserts • Electrode adapters • Table mounts • ESG tungsten grinders • ORBmax residual oxygen meter • ORBIPURGE forming set • Hose package extensions • WS2 tungsten electrodes 		


The technical data are not binding. They are not warranted characteristics and are subject to change.

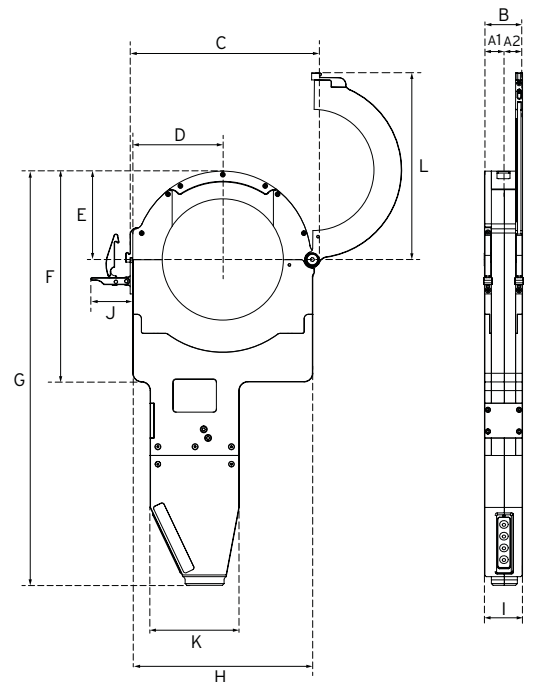

ORBIWELD 38S



ORBIWELD 76S

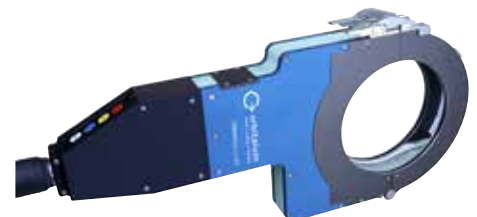

ORBIWELD 115S

Enclosed orbital weld heads OW S

ORBIWELD 38S, ORBIWELD 76S, ORBIWELD 115S

Features, application range, technical data and scope of delivery, see page 33.

Clamping inserts are not included in the scope of delivery (see from page 40).

ARTICLE	CODE		WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Enclosed orbital weld head OW 38S	826 000 001		6.900	16.500
Enclosed orbital weld head OW 76S	827 000 001		7.500	16.900
Enclosed orbital weld head OW 115S	828 000 001		9.700	18.600

* Machine weight including hose package

Suitable accessories (available option):


- Clamping inserts for ORBIWELD S and ORBIWELD, see page 40
- Cavity inserts for moldings, see page 43
- Inserts for elbow welding, see page 44
- T-piece clamping inserts, see page 44
- Electrode adapters, see page 45
- Table mounts, see page 46
- Power connector adapter set, see page 87



ORBIWELD 38S



ORBIWELD 76S

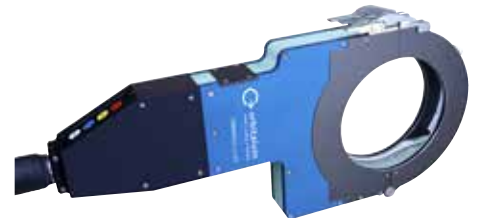

ORBIWELD 115S

ENCLOSED ORBITAL WELD HEADS

Simply rent and stay flexible.

We supply equipment over a short and long term rental condition - a cost effective alternative to purchasing.

We take care of our rental equipment so it is in top condition for you and we can help you to match the right rental equipment to your specific projects.

Renting from Orbitalum is the ideal opportunity to try out a model you're thinking of purchasing.

Your benefits of renting:

- Reducing need for storage
- Eliminating repair costs
- Conserving your capital
- Having the most up-to-date technology
- Minimizing down-time

Our rental and used machine service includes:

- Weekly rental charges
- Hire purchase
- Long-term rental

Please ask us for our favorable rental and rent-to-buy conditions:

Tel. +49 (0) 77 31 792-0


or per e-mail to

tools@orbitalum.com

ORBIWELD 170

Enclosed orbital weld head

The ORBIWELD 170 is characterized by very high thermal resistance. It is therefore particularly suitable for applications in the chemical, pharmaceutical, food and beverage industry, where ever greater demands are made on the closed weld heads by ever greater tube diameters and wall thicknesses.

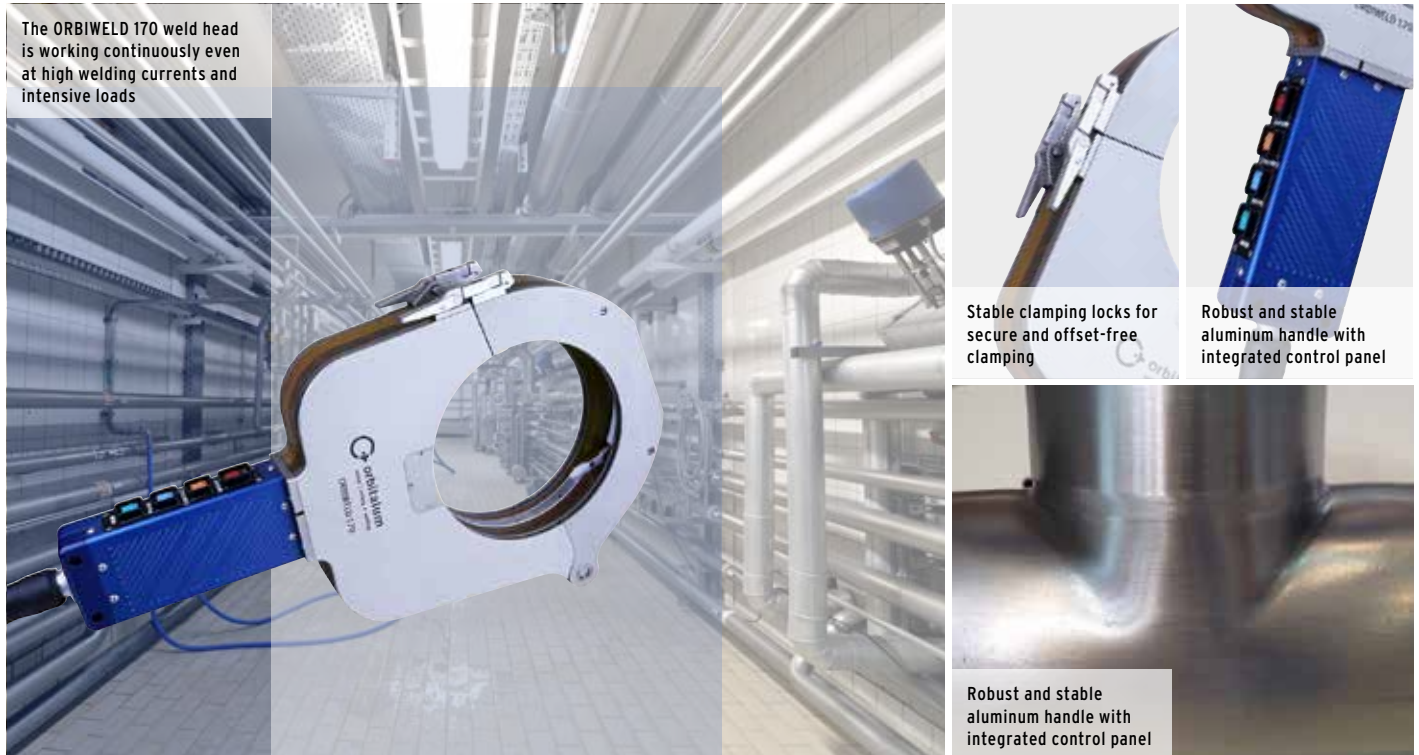

Coolant channels running through the entire weld head body ensure an excellent heat dissipation that enable the ORBIWELD weld head to work continuously even at high welding currents and intensive loads.

The closed design of the ORBIWELD 170 and the gas management system of the head ensure a permanent infiltration of the weld seam during welding with inert gas, guaranteeing seams that are very low in welding colors.

FEATURES:

- Quick change system for clamping inserts that engages and releases smoothly without any tools
- High durability due to completely liquid-cooled weld head housing
- Durable clamping connections in combination with clamping inserts available for all tube dimensions guarantee that the parts to be welded are clamped securely without misalignment

- All the important commands for welding can be transmitted to the power supply via a control panel built into the robust and durable aluminum handle, so that no additional remote control is required
- High-quality, rugged housing and handle parts
- Highly flexible hose package (Length: 7.5 m/ 24.6 ft) with strain relief to the power supply
- Cost-effective clamping inserts
- Comprehensive and customer-specific range of accessories

Comprehensive and customer-specific range of accessories (available option):



Hose package length extensions up to max. of 20 m (64 ft)



Cost-effective clamping inserts



Cavity inserts for moldings for welding of shaped pieces



T-piece clamping inserts with the ability to clamp the hollowed tube and the tube to be welded




Electrode adapters for transverse alignment of the tungsten electrode



Practical and sturdy (anodized) aluminum table mounts

APPLICATION RANGE		ORBIWELD 170
Code		825 000 001
Tube OD, min. - max.		50 - 170 mm 2" - 6"
Electrode Ø		1.6/2.4 mm 0.063"/0.094"
Machine weight including hose package		18.9 kg 41.7 lbs
Hose package length		7.5 m 24.6 ft
SCOPE OF DELIVERY		
Including:		<ul style="list-style-type: none"> • 1 Enclosed orbital weld head OW 170 • 1 Durable storage and shipping case (Code 821 030 001) • 1 Tool set • 1 Power connector adapter • 1 Feeler gauge • 1 Operating instructions and spare parts list
Suitable accessories (available option):		<ul style="list-style-type: none"> • Clamping inserts, small and wide • Cavity inserts for moldings • Inserts for elbow welding • T-piece clamping inserts • Electrode adapters • Table mounts • ESG tungsten grinders • ORBmax residual oxygen meter • ORBIPURGE forming set • Hose package extensions • Pressure regulator • WS2 tungsten electrodes

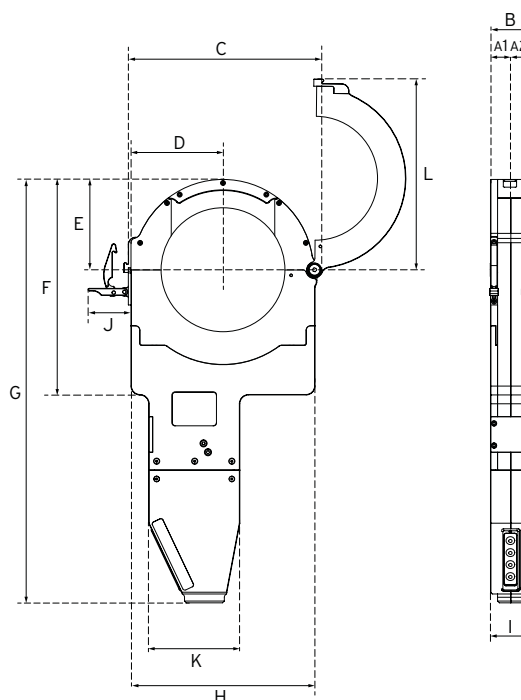

ORBIWELD 170	DIMENSION		ELECTRODE INTERVAL			
			CLAMPING INSERT TYPE "S" [2 PAIRS]		CLAMPING INSERT TYPE "W" [2 PAIRS]	
	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]
Dimension "A1"	30.00	1.181	32.00	1.260	50.00	1.969
Dimension "A2"	41.00	1.614	43.00	1.693	61.00	2.402
Dimension "B"	70.00	2.756	72.00	2.835	110.00	4.331
Dimension "C"	345.00	13.583				
Dimension "D"	160.00	6.299				
Dimension "E"	140.00	5.512				
Dimension "F"	365.00	14.370				
Dimension "G"	585.00	23.031				
Dimension "H"	285.00	11.220				
Dimension "I"	50.00	1.969				
Dimension "J"	67.00	2.638				
Dimension "K"	88.00	3.465				
Dimension "L"	332.00	13.071				

The technical data are not binding. They are not warranted characteristics and are subject to change.



ORBIWELD 170

Enclosed orbital weld head OW

ORBIWELD 170

Features, application range, technical data and scope of delivery, see page 37.

Clamping inserts are not included in the scope of delivery (see from page 40).

ARTICLE	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
Enclosed orbital weld head OW 170	825 000 001		18.900	36.200

* Machine weight including hose package



ORBIWELD 170

Suitable accessories (available option):

- Clamping inserts for ORBIWELD S and ORBIWELD, see page 40
- Cavity inserts for moldings, see page 43
- Inserts for elbow welding, see page 44
- T-piece clamping inserts, see page 44
- Electrode adapters, see page 45
- Table mounts, see page 46
- Power connector adapter set, see page 87

ENCLOSED ORBITAL WELD HEADS

Accessories for ORBIWELD S and ORBIWELD


Clamping inserts

Made of aluminum. 1 set of clamping inserts consists of 2 parts for 1 clamping side.

2 clamping inserts (= 4 parts) are required for each tube dimension.

For the ORBIWELD 115, 115S and 170 you can choose between wide "W" and small "S" clamping inserts which can be combined with one another as desired.


For clamping insert blanks which can be drilled by customer to specific diameters, see page 43.




Clamping insert
for OW 38S, 2 pcs.
for one clamping side




Clamping insert
for OW 76S, 2 pcs.
for one clamping side




Clamping insert "S" (small)
for OW 115/115S, 2 pcs.
for one clamping side



Clamping insert "W" (wide)
for OW 115/115S, 2 pcs.
for one clamping side



Clamping insert "S" (small)
for OW 170, 2 pcs.
for one clamping side



Clamping insert "W" (wide)
for OW 170, 2 pcs.
for one clamping side

TUBE OD		OW 38S		OW 76S		OW 65		OW 115/115S "S" (SMALL)		OW 115/115S "W" (WIDE)		OW 170 "S" (SMALL)		OW 170 "W" (WIDE)	
[MM]	[INCH]	CODE		CODE		CODE		CODE		CODE		CODE		CODE	
3.00	0.118	826 002 120		-		-		-		-		-		-	
3.18	0.125	826 002 122		-		-		-		-		-		-	
4.00	0.157	826 002 124		-		-		-		-		-		-	
4.76	0.187	826 002 125		-		-		-		-		-		-	
4.78	0.188	826 002 126		-		-		-		-		-		-	
5.95	0.234	826 002 127		-		-		-		-		-		-	
6.00	0.236	826 002 128		827 002 120		823 002 120		-		-		-		-	
6.35	0.250	826 002 129		827 002 121		823 002 121		-		-		-		-	
7.00	0.276	826 002 130		-		823 002 122		-		-		-		-	
7.50	0.295	826 002 131		-		-		-		-		-		-	
7.94	0.313	826 002 132		827 002 124		-		-		-		-		-	
8.00	0.315	826 002 133		827 002 125		823 002 125		-		-		-		-	
9.00	0.354	-		827 002 126		823 002 126		-		-		-		-	
9.53	0.375	826 002 135		827 002 127		823 002 127		-		-		-		-	
9.95	0.392	826 002 136		-		-		-		-		-		-	
10.00	0.394	826 002 137		827 002 129		823 002 129		-		-		-		-	
10.10	0.398	826 002 138		827 002 130		823 002 130		-		-		-		-	
10.20	0.402	826 002 139		827 002 131		-		-		-		-		-	
11.00	0.433	826 002 140		827 002 132		823 002 132		-		-		-		-	
11.95	0.470	826 002 142		827 002 134		-		-		-		-		-	
12.00	0.472	826 002 143		827 002 135		823 002 135		-		-		-		-	
12.10	0.476	826 002 144		827 002 136		-		-		-		-		-	
12.70	0.500	826 002 145		827 002 137		823 002 137		-		-		-		-	
13.00	0.512	826 002 146		827 002 138		823 002 138		-		-		-		-	
13.20	0.520	-		827 002 139		-		-		-		-		-	
13.50	0.531	826 002 148		827 002 140		-		-		-		-		-	
13.70	0.539	826 002 149		827 002 141		823 002 141		-		-		-		-	
14.00	0.551	826 002 150		827 002 142		823 002 142		-		-		-		-	
14.30	0.563	826 002 151		-		-		-		-		-		-	
14.70	0.579	826 002 152		-		-		-		-		-		-	
15.00	0.591	826 002 153		827 002 145		823 002 145		-		-		-		-	
15.30	0.602	826 002 154		827 002 146		-		-		-		-		-	
15.60	0.614	826 002 155		827 002 147		-		-		-		-		-	
15.70	0.618	826 002 156		827 002 148		-		-		-		-		-	
15.88	0.625	826 002 157		827 002 149		-		-		-		-		-	
16.00	0.630	826 002 158		827 002 150		823 002 150		-		-		-		-	
16.70	0.657	826 002 159		-		-		-		-		-		-	
17.00	0.669	-		827 002 152		-		-		-		-		-	
17.20	0.677	826 002 162		827 002 154		823 002 154		-		-		-		-	
17.30	0.681	826 002 163		827 002 155		823 002 155		-		-		-		-	
18.00	0.709	826 002 164		827 002 156		823 002 156		-		-		-		-	
19.00	0.748	826 002 165		827 002 157		823 002 157		-		-		-		-	

ENCLOSED ORBITAL WELD HEADS

TUBE OD		OW 38S	OW 76S	OW 65	OW 115/115S "S" (SMALL)	OW 115/115S "W" (WIDE)	OW 170 "S" (SMALL)	OW 170 "W" (WIDE)
[MM]	[INCH]	CODE	CODE	CODE	CODE	CODE	CODE	CODE
19.05	0.750	826 002 166	827 002 158	823 002 158	-	-	-	-
19.50	0.768	826 002 167	827 002 159	-	-	-	-	-
20.00	0.787	826 002 168	827 002 160	823 002 160	824 002 120	-	-	-
21.00	0.827	-	827 002 161	-	-	-	-	-
21.30	0.839	826 002 170	827 002 162	823 002 162	824 002 122	824 002 322	-	-
21.70	0.854	826 002 171	827 002 163	823 002 163	824 002 123	-	-	-
22.00	0.866	826 002 172	827 002 164	823 002 164	824 002 124	-	-	-
22.22	0.875	826 002 173	827 002 165	-	-	-	-	-
22.23	0.875	826 002 174	827 002 166	-	-	-	-	-
22.55	0.888	826 002 175	-	-	-	-	-	-
23.00	0.906	826 002 176	827 002 168	823 002 168	824 002 128	824 002 328	-	-
24.00	0.945	826 002 177	827 002 169	-	-	-	-	-
25.00	0.984	826 002 179	827 002 171	823 002 171	824 002 131	824 002 331	-	-
25.25	0.994	-	827 002 172	-	-	-	-	-
25.40	1.000	826 002 181	827 002 173	823 002 173	824 002 133	824 002 333	-	-
26.00	1.024	826 002 182	827 002 174	-	-	-	-	-
26.70	1.051	826 002 183	827 002 175	823 002 175	824 002 135	-	-	-
26.90	1.059	826 002 184	827 002 176	823 002 176	824 002 136	824 002 336	-	-
27.00	1.063	826 002 185	827 002 177	-	-	-	-	-
27.20	1.071	826 002 186	827 002 178	823 002 178	824 002 138	-	-	-
28.00	1.102	826 002 187	827 002 179	823 002 179	824 002 139	-	-	-
29.00	1.142	826 002 188	827 002 180	823 002 180	824 002 140	824 002 340	-	-
30.00	1.181	826 002 189	827 002 181	823 002 181	824 002 141	-	-	-
30.53	1.202	826 002 190	-	-	-	-	-	-
31.75	1.250	826 002 191	827 002 183	823 002 183	824 002 143	824 002 343	-	-
31.80	1.252	826 002 192	827 002 184	-	824 002 144	-	-	-
32.00	1.260	826 002 193	827 002 185	823 002 185	824 002 145	824 002 345	-	-
33.00	1.299	-	827 002 186	-	-	-	-	-
33.40	1.315	826 002 195	827 002 187	823 002 187	824 002 147	-	-	-
33.70	1.327	826 002 196	827 002 188	823 002 188	824 002 148	824 002 348	-	-
34.00	1.339	826 002 197	827 002 189	823 002 189	824 002 149	-	-	-
35.00	1.378	826 002 198	827 002 190	823 002 190	824 002 150	824 002 350	-	-
36.00	1.417	826 002 199	-	823 002 191	-	-	-	-
38.00	1.496	826 002 200	827 002 192	823 002 192	824 002 152	824 002 352	-	-
38.10	1.500	826 002 201	827 002 193	823 002 193	824 002 153	824 002 353	-	-
40.00	1.575	-	827 002 194	823 002 194	824 002 154	-	-	-
41.00	1.614	-	827 002 195	823 002 195	824 002 155	824 002 355	-	-
42.00	1.654	-	827 002 196	823 002 196	824 002 156	-	-	-
42.16	1.660	-	827 002 197	-	824 002 157	-	-	-
42.30	1.665	-	827 002 198	-	-	-	-	-
42.40	1.669	-	827 002 199	823 002 199	824 002 159	824 002 359	-	-
42.70	1.681	-	827 002 200	-	824 002 160	-	-	-
43.00	1.693	-	827 002 201	-	824 002 161	824 002 361	-	-
44.00	1.732	-	827 002 203	-	-	-	-	-
44.45	1.750	-	827 002 204	-	824 002 164	824 002 364	-	-
44.50	1.752	-	827 002 205	823 002 205	824 002 165	-	-	-
45.00	1.772	-	827 002 206	823 002 206	-	-	-	-
48.00	1.890	-	827 002 208	823 002 208	-	-	-	-
48.26	1.900	-	827 002 209	-	824 002 169	-	-	-
48.30	1.902	-	827 002 210	823 002 210	824 002 170	824 002 370	-	-
48.60	1.913	-	827 002 211	823 002 211	824 002 171	-	-	-
50.00	1.969	-	827 002 212	823 002 212	824 002 172	824 002 372	825 002 120	-
50.80	2.000	-	827 002 213	823 002 213	824 002 173	824 002 373	825 002 121	825 002 321
51.00	2.008	-	827 002 214	-	824 002 174	824 002 374	-	-
52.00	2.047	-	827 002 215	823 002 215	824 002 175	824 002 375	-	-
53.00	2.087	-	827 002 216	823 002 216	824 002 176	824 002 376	825 002 124	-
54.00	2.126	-	827 002 217	-	824 002 177	824 002 377	-	-
57.00	2.244	-	827 002 218	823 002 218	824 002 178	-	-	-
60.00	2.363	-	827 002 219	823 002 219	824 002 179	-	-	-
60.10	2.366	-	827 002 220	-	-	-	-	-
60.30	2.374	-	827 002 221	823 002 221	824 002 181	824 002 381	825 002 129	825 002 329
60.45	2.380	-	827 002 222	-	824 002 182	-	-	-
60.50	2.382	-	827 002 223	823 002 223	824 002 183	-	-	-
63.00	2.480	-	827 002 224	823 002 224	824 002 184	824 002 384	-	-
63.20	2.488	-	827 002 225	-	-	-	-	-
63.50	2.500	-	827 002 226	823 002 226	824 002 186	824 002 386	825 002 134	825 002 334
65.00	2.559	-	827 002 227	823 002 227	-	-	-	-

ENCLOSED ORBITAL WELD HEADS

TUBE OD		OW 38S		OW 76S		OW 65		OW 115/115S "S" (SMALL)		OW 115/115S "W" (WIDE)		OW 170 "S" (SMALL)		OW 170 "W" (WIDE)	
[MM]	[INCH]	CODE		CODE		CODE		CODE		CODE		CODE		CODE	
70.00	2.756	-		827 002 228		823 002 228		824 002 188		824 002 388		825 002 136		825 002 336	
70.20	2.764	-		-		-		824 002 189		824 002 389		-		-	
73.00	2.874	-		827 002 230		-		824 002 190		-		-		-	
73.03	2.875	-		827 002 231		-		824 002 191		-		-		-	
75.00	2.953	-		827 002 233		-		824 002 193		-		-		-	
76.00	2.992	-		827 002 234		-		824 002 194		-		-		-	
76.10	2.996	-		827 002 235		-		824 002 195		824 002 395		825 002 143		825 002 343	
76.20	3.000	-		827 002 236		-		824 002 196		824 002 396		825 002 144		825 002 344	
76.30	3.004	-		827 002 237		-		824 002 197		824 002 397		-		-	
80.00	3.150	-		-		-		824 002 198		824 002 398		-		825 002 346	
82.00	3.228	-		-		-		824 002 199		-		-		-	
82.30	3.240	-		-		-		824 002 200		-		-		-	
85.00	3.346	-		-		-		824 002 201		824 002 401		-		825 002 349	
88.90	3.500	-		-		-		824 002 203		824 002 403		825 002 151		825 002 351	
89.00	3.504	-		-		-		824 002 204		-		-		-	
89.10	3.508	-		-		-		824 002 205		824 002 405		-		-	
90.00	3.543	-		-		-		824 002 206		-		-		-	
100.00	3.937	-		-		-		824 002 209		-		-		-	
101.60	4.000	-		-		-		824 002 210		824 002 410		825 002 158		825 002 358	
104.00	4.094	-		-		-		824 002 211		824 002 411		825 002 159		825 002 359	
108.00	4.252	-		-		-		824 002 212		-		825 002 160		-	
110.00	4.331	-		-		-		824 002 213		-		-		-	
114.00	4.488	-		-		-		824 002 215		-		-		-	
114.30	4.500	-		-		-		824 002 216		824 002 416		825 002 164		825 002 364	
115.00	4.528	-		-		-		824 002 217		824 002 417		825 002 165		-	
127.00	5.000	-		-		-		-		-		825 002 167		825 002 367	
127.05	5.002	-		-		-		-		-		-		-	
129.00	5.079	-		-		-		-		-		825 002 169		825 002 369	
133.00	5.236	-		-		-		-		-		825 002 170		-	
139.70	5.500	-		-		-		-		-		825 002 171		825 002 371	
152.40	6.000	-		-		-		-		-		825 002 173		825 002 373	
154.00	5.063	-		-		-		-		-		825 002 174		825 002 374	
159.00	6.260	-		-		-		-		-		825 002 175		-	
165.20	6.504	-		-		-		-		-		825 002 177		-	
168.30	6.626	-		-		-		-		-		825 002 178		825 002 378	
170.00	6.693	-		-		-		-		-		825 002 179		825 002 379	

ENCLOSED ORBITAL WELD HEADS

Clamping insert blanks

Ideal for special applications.

Completely enclosed clamping inserts which can be drilled by customer to specific diameters.

ARTICLE	CODE		KG
Clamping insert blank for OW 38S, 2 pcs.	826 002 210		1.000
Clamping insert blank for OW 76S, 2 pcs.	827 002 241		0.280
Clamping insert blank for OW 115/115S "S" (small), 2 pcs.	824 002 220		0.590
Clamping insert blank for OW 115/115S "W" (wide), 2 pcs.	824 002 420		1.445
Clamping insert blank for OW 65, 2 pcs.	823 002 230		0.256
Clamping insert blank for OW 170 "S" (small), 2 pcs.	825 002 185		1.010
Clamping insert blank for OW 170 "W" (wide), 2 pcs.	825 002 385		1.000



Clamping insert blanks

Plastic covers for clamping inserts

All clamping inserts are delivered in pairs only in a plastic cover.

In the event of loss of the original packaging it can be reordered.

ARTICLE	CODE		KG
Plastic cover for clamping inserts OW 38S	826 002 010		0.019
Plastic cover for clamping inserts OW 76S/OW 65	827 002 010		0.065
Plastic cover for clamping inserts OW 115 "S" (small)	824 002 010		0.101
Plastic cover for clamping inserts OW 115 "W" (wide)	824 002 011		0.129



Plastic covers for clamping inserts


Cavity inserts for moldings

Clamping inserts for welding of shaped pieces (e.g. flanges, flanged wheels and screw fittings in the food industry).

1 cavity insert consists of 2 half shells.

Dimensions of the different cavity inserts:

ORBIWELD		DIMENSION "A"(Ø)	DIMENSION "B"
38S	[mm]	85.0	30.0
	[inch]	3.346	1.181
65	[mm]	125.0	30.0
	[inch]	4.921	1.181
76S	[mm]	130.0	35.0
	[inch]	5.118	1.378
115/115S	[mm]	179.0	39.0
	[inch]	7.047	1.535
170	[mm]	214.0	44.0
	[inch]	8.425	1.732



Cavity insert for moldings

ARTICLE	CODE		KG
Cavity insert for moldings for OW 38S	826 050 010		0.146
Cavity insert for moldings for OW 76S	827 050 007		0.266
Cavity insert for moldings for OW 65	823 050 010		0.612
Cavity insert for moldings for OW 115 and OW 115S	824 050 003		0.660
Cavity insert for moldings for OW 170	825 050 002		0.852

ENCLOSED ORBITAL WELD HEADS



T-piece clamping inserts

T-piece clamping inserts

Clamping inserts with the ability to clamp the hollowed tube and the tube to be welded.

For each task and dimension, 1 complete T-piece clamping insert set, 1 electrode adapter set (page 45) as well as 1 standard clamping insert set (from page 40) is required (to be ordered separately).

When ordering, please request from us the respective questionnaire and then submit the completed form together with a drawing.

Special clamping inserts for other orbital weld heads are available on request.
Inner centering with simultaneous forming system are available on request.

ARTICLE	TUBE OD MAX. [MM]	TUBE OD MAX. [INCH]	CODE		KG
T-piece clamping inserts for OW 38S	25.0	0.984	826 050 038		
T-piece clamping inserts for OW 76S	48.0	1.890	827 050 005		0.720
T-piece clamping inserts for OW 115/115S	85.0	3.346	824 050 004		1.825
T-piece clamping inserts for OW 170	144.0	5.669	825 050 003		3.700


Inserts for elbow welding
(Basic retainer/Cover)

Inserts for elbow welding

For welding of standard elbows to tubes without straight side attachment. When using this inserts on a weld head side (left or right) only the gas protection around the elbow is guaranteed; there is no clamping so that the elbow has to be tacked in place before welding.

Inserts, consisting of:

- 2 basic retainers, independent of the tube diameter
- 2 covers, depending on the tube diameter*

Retainer/Cover

The covers are placed into the retainer and can be turned so that the side of the elbow can exit at any angle from the weld head. The tube to be welded on the other side of the weld head must be straight and be clamped with inserts from the particular standard clamping insert set (standard clamping inserts are not included in the scope of delivery).

Elbow cover plate for OW 38S

For the OW 38S the covers (2 halves) are made to customer specifications* and have to be placed without retainers directly into the head. A basic retainer is therefore not required.

When ordering, please indicate and/or submit:

- The required tube OD and the inside radius of the elbow.
- **Drawing of the elbow or sample part – an appropriate drawing template is available in advance on request.** We will then check whether or not an additional electrode adapter is required.

ARTICLE	CODE		KG
Elbow cover plate OW 38S complete*	826 050 031		0.017
Basic retainer for elbow insert for OW 76S	827 002 018		0.150
Cover for elbow insert for OW 76S	827 050 021		0.030
Basic retainer for elbow insert for OW 65	823 050 029		0.089
Cover for elbow insert for OW 65*	823 050 030		0.028
Basic retainer for elbow insert for OW 115 and OW 115S	824 050 006		0.150
Cover for elbow insert for OW 115S*	828 050 016		0.054
Cover for elbow insert for OW 115*	824 050 020		0.050
Basic retainer for elbow insert for OW 170	825 050 005		0.250
Cover for elbow insert for OW 170*	825 050 020		0.045

* When ordering, please submit a drawing of the elbow or the sample part.

ENCLOSED ORBITAL WELD HEADS


Electrode adapters

Robust brass adapter for transverse alignment of the tungsten electrode.
Can be ordered as a set or individually.

Please note that the maximum tube diameter that can be welded is reduced by using an electrode adapter.

The complete electrode adapter set consists of:

- Base part for extension arms
- Extension arms 15°, 30°, 45° and 90°



Electrode adapters for OW 38S, OW 76S



Electrode adapter for OW 170

ELECTRODE ADAPTERS ARE APPLICABLE UP TO MAX. TUBE DIAMETER	[MM]	[INCH]
OW 38S	25.0	0.984
OW 76S	48.0	1.890
OW 65	43.5	1.713
OW 115 / OW 115S	85.0	3.346
OW 170	144.0	5.669

ELECTRODE ADAPTER SETS	CODE	KG
Electrode adapter set OW 38S, Standard	826 050 034	0.033
Electrode adapter set OW 76S, Standard	827 050 027	0.089
Electrode adapter set OW 65, Standard	823 050 028	0.045
Electrode adapter set OW 115 Standard	824 050 025	0.064
Electrode adapter set OW 115S, Standard	828 050 022	0.064
Electrode adapter set OW 170, Standard	825 050 022	0.094

INDIVIDUAL PARTS FOR OW 38S		
Base part extension arms OW 38S	826 004 003	0.013
10 mm/0.394", 15° extension arm for electrode adapters OW 38S	823 004 008	0.003
10 mm/0.394", 30° extension arm for electrode adapters OW 38S	823 004 009	0.003
10 mm/0.394", 45° extension arm for electrode adapters OW 38S	823 004 010	0.003

INDIVIDUAL PARTS FOR OW 76S		
Base part extension arms OW 76S	827 004 003	0.024
15 mm/0.591", 15°/90° extension arm for electrode adapters OW 76S	823 004 002	0.005
15 mm/0.591", 30°/90° extension arm for electrode adapters OW 76S	823 004 003	0.005
15 mm/0.591", 45°/90° extension arm for electrode adapters OW 76S	823 004 004	0.005

INDIVIDUAL PARTS FOR OW 65		
Base part extension arms OW 65	823 004 011	0.018
15 mm/0.591", 15°/90° extension arm for electrode adapters OW 65	823 004 002	0.005
15 mm/0.591", 30°/90° extension arm for electrode adapters OW 65	823 004 003	0.005
15 mm/0.591", 45°/90° extension arm for electrode adapters OW 65	823 004 004	0.005

INDIVIDUAL PARTS FOR OW 115 AND OW 115S		
Base part extension arms OW 115	824 004 002	0.037
Base part extension arms OW 115S	828 004 004	0.037
25 mm/0.984", 15°/90° extension arm for electrode adapters OW 115/115S	823 004 006	0.009
25 mm/0.984", 30°/90° extension arm for electrode adapters OW 115/115S	823 004 005	0.009
25 mm/0.984", 45°/90° extension arm for electrode adapters OW 115/115S	823 004 007	0.009

INDIVIDUAL PARTS FOR OW 170		
Base part extension arms OW 170	825 004 001	0.067
25 mm/0.984", 15°/90° extension arm for electrode adapters OW 170	823 004 006	0.009
25 mm/0.984", 30°/90° extension arm for electrode adapters OW 170	823 004 005	0.009
25 mm/0.984", 45°/90° extension arm for electrode adapters OW 170	823 004 007	0.009

ELECTRODE ADAPTERS FOR HEAD SEAM WELDING*		
Electrode adapter set OW 38S head seam welding	826 050 036	0.045
Electrode adapter set OW 76S head seam welding	827 050 038	0.045
Electrode adapter set OW 65 head seam welding	823 050 034	0.045
Electrode adapter set OW 115 head seam welding	824 050 026	0.070
Electrode adapter set OW 115 S head seam welding	828 050 023	0.070

ELECTRODE ADAPTER FOR INSIDE WELDING*		
Electrode adapter set OW 38S inside welding	826 050 037	0.071
Electrode adapter set OW 76S inside welding	827 050 039	0.071
Electrode adapter set OW 115 inside welding	824 050 027	0.193
Electrode adapter set OW 115 S inside welding	828 050 024	0.193
Electrode adapter set OW 170 inside welding	825 050 026	

* Further electrode adapters for other weld heads upon request.



Head seam adapter (without rotor)



Adapter for inside welding (without rotor)

ENCLOSED ORBITAL WELD HEADS



Table mounts

Table mounts

Practical and sturdy (anodized) aluminum table mounts.
For comfortable and secure storage of the ORBIWELD weld heads.

The mount is quickly and easily clamped to the table top using the integrated screw clamp. Thus, the weld head is firmly fixed in the holder for stationary applications – also ideal for storage or temporary placement of the weld head between individual welding jobs.

TECHNICAL DATA	TABLE MOUNTS		
Dimensions (lxwxh)	180 x 140 x 185 mm 7.1" x 5.5" x 7.3"		
Clamping range (bottom surface of table to maximum extended screw clamp)	max. 65 mm / 2.56"		
ARTICLE	CODE		KG
Table mount for OW 38S, OW 76S	826 030 006		1.250
Table mount for OW 65, OW 115, OW 115S, OW 170	823 030 006		1.070

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- Hose package extensions, see page 86
- WS2 tungsten electrodes, see page 87
- Power connector adapter set, see page 87

NEW

HX 12P, HX 25P

Enclosed orbital weld heads

Welding stainless-steel pipes economically and with high quality using the TIG welding procedure: Unique in the entire world, HX orbital weld heads are the best solution for efficient, high-quality production thanks to their automated welding technology. Pre-mounted pipe elbows (for example in heat exchanger construction), even those in tight pipe bundles, can be joined to small stainless-steel pipes reliably, quickly and safely.



Drastically shortened welding times – under 30 seconds per pipe	✓
Up to 250 welds per head and layer	✓
Compared to manual work, the preparation time is reduced by around 50%	✓
Pipe spacings: HX 12P: under 40 mm (1.57") HX 25P: under 60 mm (2.36")	✓
For pipe diameters: HX 12P: 9.5 ... 13.3 mm (0.37" ... 0.52") HX 25P: 18.0 ... 25.4 (0.71" ... 1.00")	✓
Highly durable thanks to liquid-cooled rotor housing	✓
Horizontal, vertical and tilted welding positions are possible	✓
Very robust and ergonomic design	✓
Top-quality welding results, even with semiskilled personnel	✓

In addition to the HX 12P and HX 25P, this series also includes the HX 16P.

When done by hand, the welding of pipe elbows for heat exchanger construction is an exhausting task. In addition, consistently high quality (and thus the proper sealing of all pipe elbows) on a continual basis by the welder can't be guaranteed. This results in expensive correction work and lots of waste.

While conventional heads and tongs require lots of space between the pipes for positioning, slim HX heads make it possible to build very compact heat exchangers with a high pipe density and thus a high degree of efficiency. Pipe spacings under 40 mm (1.57") are possible with the HX 12P and under 60 mm (2.36") with the HX 25P.

Handling is easy, too. HX heads are opened up, placed around a pipe and clamp themselves pneumatically at the push of a button. A stop with coarse and fine adjustment aids secure

positioning on the pipe. Following the startup procedure, the water-cooled head floods with argon gas and welding is carried out automatically with consistently high quality. The Orbitalum system ensures clean weld penetration with no recesses, gaps or burrs in the pipe whatsoever. Clamping and starting are activated by pressing buttons on the weld head.

Top-quality welding results, even with semi-skilled personnel

Orbitalum welding power supplies automatically detect the connected HX head and its specified parameters in such a way that the operator need only call up the corresponding welding procedure and initiate the process prior to the start of welding. Working with the Orbitalum system is so easy and reliable that even semi-skilled operators can achieve optimum welding results.

Practice has shown that waste can be reduced from 4% to under 0.7% with the Orbitalum

system. Another advantage of the system is that an operator can work with multiple weld heads at the same time, which increases production efficiency considerably. The closed welding chamber and consistent process also prevent annealing coloration from occurring, so expensive reworking such as pickling and passivation can usually be dispensed with.

Compact design makes handling easy

In contrast to open welding tongs, all connections for power, gas and cooling water are integrated into the HX head. To facilitate handling, Orbitalum heads are connected to the welding power source with a flexible 7.5 m hose. The HX 12P and HX 25P also scores with its straight design, which enables easy turning of the head at the heat exchanger. The entire unit can be suspended from a balancer to take the strain off the operator.



Extremely narrow design
- ideal for the welding of
pre-mounted elbows in tight
pipe bundles



Pneumatic box included in
the scope of delivery



Available option:
Diameter-specific clamping
inserts





Available option:
Earth cable



Available option:
Adjustable bar pressure
regulator for Argon



The perfect complement:
Orbital welding power
supplies ORBIMAT

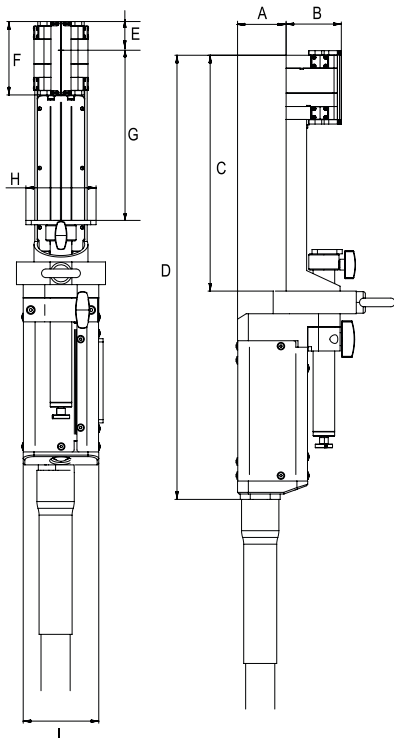

APPLICATION RANGE	HX 12P	HX 25P		
Code	847 000 010	845 000 010		
Tube OD, min. - max.*	9.5 - 13.3 mm / 0.374" - 0.524"	18.0 - 25.4 mm / 0.708" - 1.000"		
Wall thickness, min. - max.	0.5 - 0.8 mm / 0.02" - 0.03"	0.5 - 1.0 mm / 0.016" - 0.039"		
TECHNICAL DATA	HX 12P	HX 25P		
Electrode Ø	1.6 mm / 0.063"	1.6 mm / 0.063"		
Machine weight including hose package	6.4 kg / 14.1 lbs	18.5 kg / 40.8 lbs		
Hose package length	7.5 m / 24.6 ft	7.5 m / 24.6 ft		
TECHNICAL DATA	PNEUMATIC BOX	PNEUMATIC BOX		
Input	Argon	Argon		
Recommended input pressure	6 bar / 87 PSI	6 bar / 87 PSI		
DIMENSIONS	HX 12P	HX 25P		
	[mm]	[inch]	[mm]	[inch]
Dimension "A"	45.0	1.772	62.0	2.441
Dimension "B"	52.0	2.047	68.0	2.677
Dimension "C"	219.0	8.622	278.0	10.945
Dimension "D"	412.0	16.220	496.0	19.528
Dimension "E" (Electrode), min.	30.0	1.181	35.0	1.378
Dimension "F"	70.0	2.756	80.0	3.150
Dimension "G" up to max.	155.0	7.283	210.0	8.268
Dimension "H"	65.0	2.559	80.0	3.150
Dimension "I"	70.0	2.756	100.0	3.937
Dimension "J" (Ø)	33.0	1.299	43.0	1.693
Dimension "K"	50.0	1.969	72.0	2.835
SCOPE OF DELIVERY	HX 12P	HX 25P		
Enclosed orbital weld head of the HX series	Pc. 1	1		
Durable storage and shipping case	Pc. 1	1		
Pneumatic box	Pc. 1	1		
Supply hose (2 m/6.56 ft) for pneumatic box	Pc. 1	1		
Pivoting arm	Pair 1	1		
Elbow stop	Pc. 1	1		
Tool set	Set 1	1		
Power connector adapter	Pc. 1	1		
Operating instructions and spare parts list	Set 1	1		
SUITABLE ACCESSORIES				
Available option:		<ul style="list-style-type: none">• Clamping inserts• Bar pressure regulator Argon• Earth cable• WS2 tungsten electrodes• ESG tungsten grinders		

The technical data are not binding. They are not warranted characteristics and are subject to change.

* Other dimensions on request




HX 16P

Enclosed orbital weld head

The orbital weld heads HX for compact cooling systems are setting new standards!

"HX" stands for "heat exchanger" and for the welding of pre-mounted elbows in tight pipe bundles of heat exchangers into a pipe coil.

There is no other solution as effective as this one in the world!

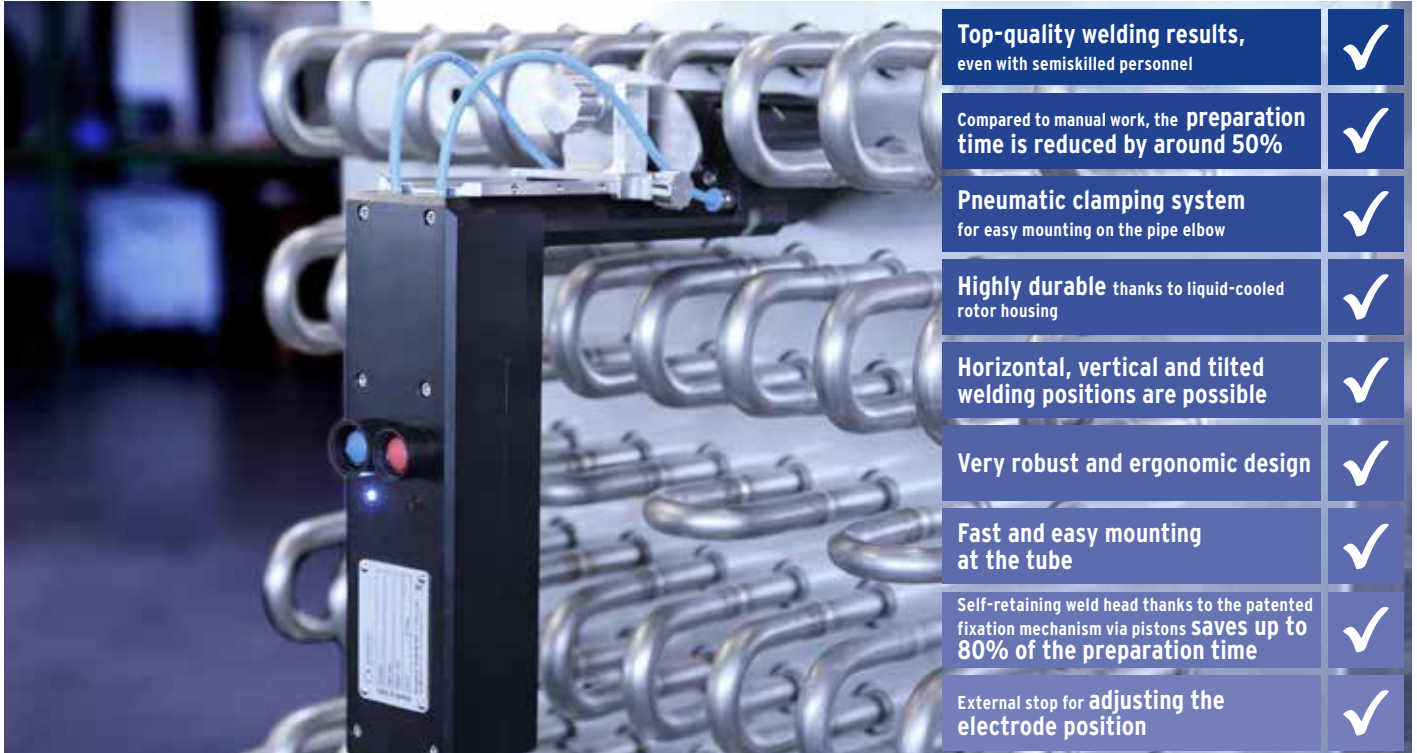

Due to their compact size, all fully closed or open orbital weld heads commonly available on the market are not suitable for being positioned between the individual pipes of finned heat exchangers.

The HX series scores points in the areas of economy and efficiency when compared to conventional weld heads: The pipe ends of a heat exchanger can be fully fitted with elbows before joining and then welded in any order. For conventional orbital weld heads, the principle of fit elbow, weld, fit elbow, weld etc. applies, always starting from the center of the pipe sheet and working outward. If quality testing reveals a faulty weld later on, all elbows must be disconnected and new ones must be welded on in the worst case scenario (fault in the middle of the bundle) due to the accessibility factor. With the HX head, only the affected elbow would have to be replaced.

This design-based advantage also makes the Orbitalum system the ideal tool for unbeatably cost-effective repairs.

In contrast to open weld heads with a cumbersome hose assembly, all connections for power, gas and cooling liquid are permanently integrated in the HX.

All orbital welding power sources from Orbitalum automatically detect the head and its properties so that the operator only has to call up his or her specified jointing program and start the joining process before beginning to weld.

Traditionally, complex heat exchangers for cooling systems were made of copper and soldered with the pipe elbows. The high price of copper prompted manufacturers to switch over to stainless steel for production. Stainless


steel can only be joined economically, reliably and in high quality with tungsten inert gas (TIG) welding in conjunction with mechanized orbital welding.




Extremely narrow design
- ideal for the welding of
pre-mounted elbows in tight
pipe bundles



All connections for
electricity, gas and cooling
water are firmly integrated



Pneumatic box included in the
scope of delivery



Available option:
Diameter-specific clamping
inserts and earth cable





Available option:
Adjustable bar pressure
regulator for Argon



The perfect complement:
Orbital welding power
supplies ORBIMAT



HX 16P

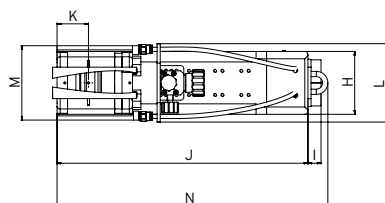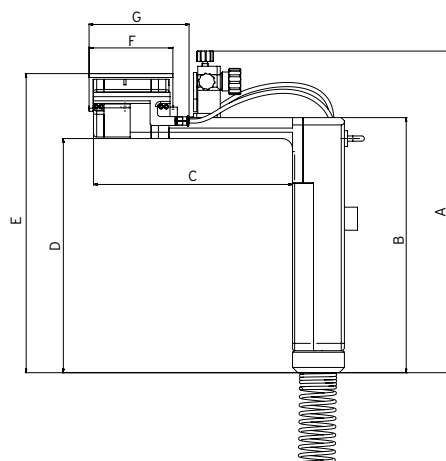

APPLICATION RANGE		HX 16P	
Code		848 000 010	
Tube OD, min. - max.*	[mm]	15.0 - 16.8	
	[inch]	0.591 - 0.661	
TECHNICAL DATA		HX 16P	
Electrode Ø	[mm]	1.6	
	[inch]	0.063	
Machine weight including hose package	[kg]	5.9	
	[lbs]	13.0	
Hose package length	[m]	7.5	
	[ft]	24.6	
TECHNICAL DATA		PNEUMATIC BOX	
Input		Argon	
Recommended input pressure	[bar]	8	
	[PSI]	116	
DIMENSIONS		HX 16P	
		[mm]	[inch]
Dimension "A"		307.00	12.087
Dimension "B"		243.50	9.587
Dimension "C"		190.00	7.480
Dimension "D"		223.50	8.799
Dimension "E"		285.50	11.240
Dimension "F"		80.00	3.150
Dimension "G"		95.45	3.758
Dimension "H"		60.00	2.362
Dimension "I"		12.50	0.492
Dimension "J"		239.50	9.429
Dimension "K" (Electrode)		30.00	1.181
Dimension "L"		74.85	2.947
Dimension "M"		71.00	2.795
Dimension "N"		258.50	10.177
SCOPE OF DELIVERY		HX 16P	
Enclosed orbital weld head of the HX series	Pc.	1	
Durable storage and shipping case	Pc.	1	
Pneumatic box	Pc.	1	
Supply hose (2 m/6.56 ft) for pneumatic box	Pc.	1	
Pivoting arm	Pair	1	
Elbow stop	Pc.	1	
Sheet stop alignment kit	Pc.	1	
Tool set	Set	1	
Power connector adapter	Pc.	1	
Operating instructions and spare parts list	Set	1	
SUITABLE ACCESSORIES			
Available option:		<ul style="list-style-type: none">• Clamping inserts• Bar pressure regulator Argon• Earth cable• WS2 tungsten electrodes• ESG tungsten grinders	

* Other dimensions on request

The technical data are not binding. They are not warranted characteristics and are subject to change.

Enclosed orbital weld heads

HX 12P, HX 16P, HX 25P

Features, application range, technical data and scope of delivery, see page 47 and page 49.

The following accessories are essentially required for operating the HX enclosed orbital weld heads and must be ordered separately:

- Clamping inserts, see page 52
- Earth cable, see page 86
- Bar pressure regulator "Argon", see page 52.



HX 12P / HX 25P



HX 16P

ARTICLE	CODE		WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Enclosed orbital weld head HX 12P	847 000 010		6.400	14.100
Enclosed orbital weld head HX 16P	848 000 010		5.900	16.600
Enclosed orbital weld head HX 25P	845 000 010		18,500	40.800

* Machine weight including hose package

Suitable accessories (available option):

- Clamping inserts, see page 52
- Bar pressure regulator "Argon", see page 52.
- Earth cable, see page 86
- WS2 tungsten electrodes, see page 87
- ESG tungsten grinders, see page 79
- Power connector adapter set, see page 87



Pneumatic box
(included in the scope of delivery of the HX heads)

ENCLOSED ORBITAL WELD HEADS



Clamping inserts

Accessories for HX

Clamping inserts

Made of stainless steel.

2 clamping inserts for each dimension are required.

Further dimensions available on request.

ARTICLE	PIPE OD		FOR HX 12P		FOR HX 16P		FOR HX 25P	
	[MM]	[INCH]	CODE	KG	CODE	KG	CODE	KG
Clamping insert	9.50	0.374	847 002 020	0.018	-	-	-	-
Clamping insert	11.00	0.433	847 002 027	0.003	-	-	-	-
Clamping insert	12.00	0.472	847 002 021	0.018	-	-	-	-
Clamping insert	12.40	0.488	847 002 026	0.002	-	-	-	-
Clamping insert	12.43	0.489	847 002 024	-	-	-	-	-
Clamping insert	12.70	0.500	847 002 023	0.018	848 002 301	0.006	-	-
Clamping insert	13.30	0.524	847 002 025	0.002	848 002 302	0.006	-	-
Clamping insert	15.00	0.591	-	-	848 002 303	0.005	-	-
Clamping insert	15.75	0.620	-	-	848 002 305	0.004	-	-
Clamping insert	15.88	0.625	-	-	848 002 306	0.002	-	-
Clamping insert	16.00	0.630	-	-	848 002 307	0.002	-	-
Clamping insert	16.20	0.638	-	-	848 002 308	0.002	-	-
Clamping insert	16.30	0.642	-	-	848 002 309	0.002	-	-
Clamping insert	16.50	0.650	-	-	848 002 310	0.002	-	-
Clamping insert	16.60	0.654	-	-	848 002 311	0.002	-	-
Clamping insert	18.00	0.709	-	-	-	-	-	-
Clamping insert	19.05	0.750	-	-	-	-	-	-
Clamping insert	20.00	0.787	-	-	-	-	845 002 210	-
Clamping insert	22.00	0.866	-	-	-	-	845 002 208	-
Clamping insert	22.22	0.875	-	-	-	-	-	-
Clamping insert	23.00	0.906	-	-	-	-	845 002 211	-
Clamping insert	25.00	0.984	-	-	-	-	845 002 209	-
Clamping insert	25.40	1.000	-	-	-	-	845 002 212	-



Bar pressure regulator "Argon"

Bar pressure regulator "Argon"

Adjustable bar pressure regulator for Argon for pneumatic clamping of the HX.

TECHNICAL DATA	BAR PRESSURE REGULATOR "ARGON"
Inlet pressure (max.)	230 bar
Outlet pressure	0 - 10 bar
Gas cylinder connection	W21.8x1/14"
Hose connection	G 1/4"

ARTICLE	CODE	KG
Bar pressure regulator "Argon"	888 000 006	1.428

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- WS2 tungsten electrodes, see page 87
- Power connector adapter set, see page 87

ENCLOSED ORBITAL WELD HEADS


Open orbital weld heads



Overview open orbital weld heads

MODEL		TP 250	TP 250	TP 400	TP 400	TP 400	TP 600	TP 600	TP 600	TP 1000	TP 1000	TP 1000
WITH COLD WIRE UNIT (KD):			KD4		KD3-100	KD3-100		KD3-100	KD3-100		KD3-100	KD3-100
WITH ARC VOLTAGE CONTROL (AVC) AND OSCILLATION (OSC):						AVC/OSC			AVC/OSC			AVC/OSC
CODE		811 000 001	811 000 005	812 000 010	812 000 011	812 000 012	813 000 001	813 000 005	813 000 002	814 000 001	814 000 005	814 000 002
APPLICATION RANGE	[mm]	8 - 28 28 - 76.2		(15)** 30 - 115			70 - 170			120 - 275		
	[inch]	0.315 - 1.102 1.102 - 3.000		(0.591)** 1.181 - 4.528			2.756 - 6.693			4.724 - 10.827		
ELECTRODE LENGTHS	[mm]	18 - 32		30 - 55			30 - 55			30 - 55		
	[inch]	0.709 - 1.260		1.181 - 2.165			1.181 - 2.165			1.181 - 2.165		
WIRE DIAMETER*	[mm]	0.8*		0.8*			0.8*			0.8*		
	[inch]	0.031*		0.031*			0.031*			0.031*		

* Wire diameter 1.0 mm (0.039") is separately available.

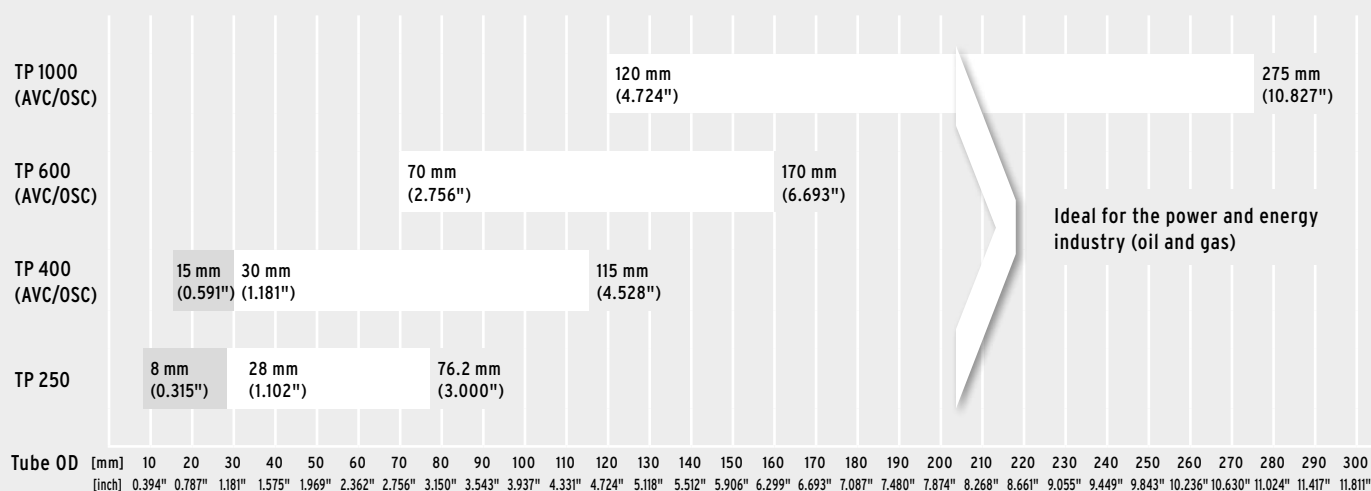


ORBIWELD TP

Open orbital weld heads

The ORBIWELD TP series offers outstanding features in terms of design and functionality:


An extremely compact design has been achieved thanks to the drive motor that is fully integrated into the housing. The drive concept has made the well-known large and costly drives associated with conventional weld heads unnecessary. For field applications the compact wire feeder on the weld head is more comfortable than a separate, heavy wire feeder.

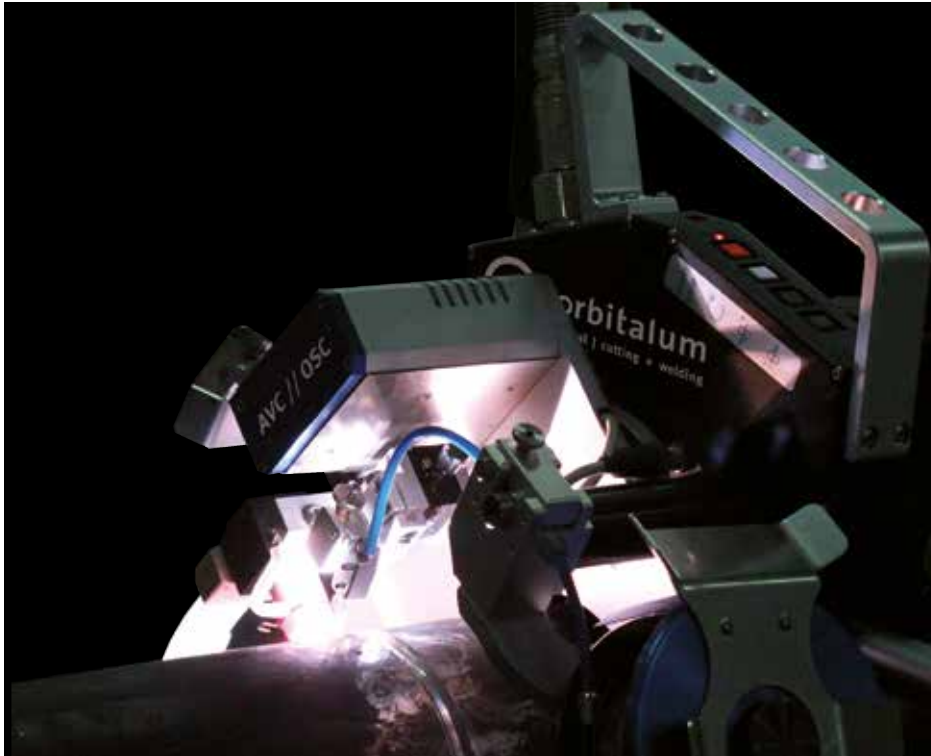

TP 400 AVC/OSC



Clamping unit

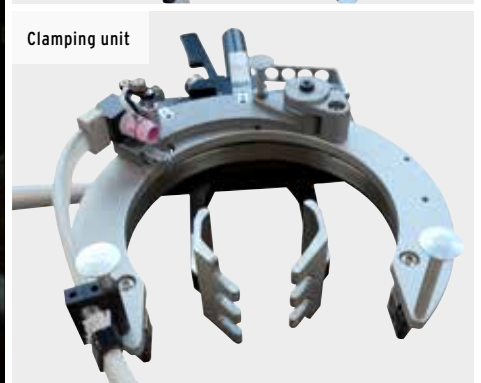

FEATURES OF THE TP SERIES:

- Compact design without any protrusions that would be disturbing in practice
- Applicable with and without cold wire unit
- Cold wire unit retrofittable for all TP weld heads
- With the KD3 versions, the reel for holding the additional wire during TIG cold wire welding is also mounted on the weld head housing. This prevents an irritating twisting of the wire during the joining process
- The cold wire feed nozzle can be adjusted exactly in both a vertical and horizontal direction
- Open arc system
- Infinitely variable clamping mechanism
- Liquid-cooled, continuously adjustable TIG torch head allows fillet welds or short hollowed out tubes to be welded
- The TIG torch head is secured to a slide unit that allows the position of the electrodes to be finely adjusted with great accuracy even during welding

- Simple adjustment of the clamping unit to the pipe diameter without the need for any tools
- The standard equipment of the TP 1000 heads include clamping plates made from tool steel which ensures optimum retention to the pipe surface. The ORBIWELD TP 250, TP 400 and TP 600 are equipped with clamping jaws made of stainless steel (1.4305). Besides increased clamping force, this new clamping system offers improved handling and easier and more precise alignment of the weld head on the pipe. Clamping jaws to extend the clamping range (TP 400) are optionally available. The new clamping unit can be upgraded for older TP 250, TP 400 and TP 600 models.
- TP weld heads are easily centered to the tube and clamped in place with the help of a clamping lever
- No additional remote control is required thanks to the keys integrated directly into the weld head housing

ADDITIONAL FEATURES OF THE TP AVC/OSC:


- With oscillation (OSC) and arc voltage control (AVC) - only applicable in combination with the orbital welding power supply ORBIMAT 300 CA AVC/OSC
- The arc length is kept at a constant gap mechanically; with AVC/OSC versions the constant gap is kept automatically
- Can be used for thick wall pipes (multiple layer welds)
- Including a motorized travel option for the TIG torch across the nominal diameter, so that no additional mechanical basic presetting is required for any change in the tube diameter
- Max. oscillation of the torch: 20 mm (0.787")
- Directly on the weld head mounted cold wire feed unit with retainer for Ø 100 mm/1 kg (3.937"/2.2 lbs) wire coil

MODEL	TP 250	TP 250	TP 400	TP 400	TP 400	TP 600	TP 600	TP 600	TP 1000	TP 1000	TP 1000
With cold wire unit (KD):		KD4		KD3-100	KD3-100		KD3-100	KD3-100		KD3-100	KD3-100
With arc voltage control (AVC) and oscillation (OSC):					AVC/OSC			AVC/OSC			AVC/OSC
Code	811 000 001	811 000 005	812 000 010	812 000 011	812 000 012	813 000 001	813 000 005	813 000 002	814 000 001	814 000 005	814 000 002
Application range	[mm]	8 - 28 28 - 76.2	8 - 28 28 - 76.2	(15)*/30 - 115	(15)*/30 - 115	(15)*/30 - 115	70 - 170	70 - 170	70 - 170	120 - 275	120 - 275
	[inch]	0.315 - 1.102 1.102 - 3.000	0.315 - 1.102 1.102 - 3.000	(0.591)*/ 1.181 - 4.528	(0.591)*/ 1.181 - 4.528	(0.591)*/ 1.181 - 4.528	2.756 - 6.693	2.756 - 6.693	2.756 - 6.693	4.724 - 10.827	4.724 - 10.827
Electrode lengths	[mm]	18 - 32	18 - 32	30 - 55	30 - 55	30 - 55	30 - 55	30 - 55	30 - 55	30 - 55	30 - 55
	[inch]	0.709 - 1.260	0.709 - 1.260	1.181 - 2.165	1.181 - 2.165	1.181 - 2.165	1.181 - 2.165	1.181 - 2.165	1.181 - 2.165	1.181 - 2.165	1.181 - 2.165
Wire diameter*	[mm]	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**	0.8/ 1.0**
	[inch]	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**	0.031/ 0.039**
Weight of machine with hose package	[kg]	7.0	8.9	11.0	12.5	15.2	13.7	15.2	18.9	22.5	28.7
	[lbs]	15.4	19.6	24.3	27.6	33.5	30.2	33.5	41.7	49.6	63.3
Hose package length	[m]	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5	7.5
	[ft]	24.6	24.6	24.6	24.6	24.6	24.6	24.6	24.6	24.6	24.6
Dimension "A":	[mm]	86.00	86.00	108.00	108.00	150.00	147.00	147.00	185.00	215.00	245.00
	[inch]	3.386	3.386	4.252	4.252	5.906	5.787	5.787	7.283	8.465	9.646
Dimension "B" without cold wire unit KD:	[mm]	86.00	86.00	108.00	-	-	147.00	-	-	215.00	-
	[inch]	3.386	3.386	4.252	-	-	5.787	-	-	8.465	-
Dimension "C" with cold wire unit KD:	[mm]	-	-	-	180.00	175.00	-	196.00	215.00	-	237.00
	[inch]	-	-	-	7.087	6.890	-	7.717	8.465	-	9.331
Dimension "D":	[mm]	85.00	85.00	120.00	182.00	182.00	140.00	140.00	186.00	170.00	206.00
	[inch]	3.346	3.346	4.724	7.165	7.165	5.512	5.512	7.323	6.693	8.110
Dimension "E":	[mm]	74.00	74.00	90.00	165.00	165.00	97.00	97.00	172.00	146.00	191.00
	[inch]	2.913	2.913	3.543	6.496	6.496	3.819	3.819	6.772	5.748	7.520
Dimension "F":	[mm]	125.00	125.00	200.00	200.00	200.00	202.00	202.00	202.00	270.00	270.00
	[inch]	4.921	4.921	7.874	7.874	7.874	7.953	7.953	7.953	10.630	10.630
Integrated remote control	●	●	●	●	●	●	●	●	●	●	●
Liquid-cooled torch body	●	●	●	●	●	●	●	●	●	●	●
Pivoting torch body	●	●	●	●	●	●	●	●	●	●	●
Precise adjustment of the electrode position	●	●	●	●	●	●	●	●	●	●	●
Coupling for manual rotation of the rotor	●	●	●	●	●	●	●	●	●	●	●
Infinitely variable clamping mechanism	●	●	●	●	●	●	●	●	●	●	●
Optional extension of the clamping range	●	●	●	●	●	○	○	○	○	○	○
Integrated cold wire feed	○	○	●	●	●	●	●	●	●	●	●
External cold wire feed	●	●	○	○	○	○	○	○	○	○	○
Fine adjustment of the wire position	●	●	●	●	●	●	●	●	●	●	●
AVC arc voltage control***	○	○	○	○	○	○	○	○	○	○	○
OSC oscillation***	○	○	○	○	○	○	○	○	○	○	○

The technical data are not binding. They are not warranted characteristics and are subject to change.

● = feature included ○ = feature not included ● = feature limited included * with accessories ** KD retrofit kits optionally available (page 58) *** only applicable in combination with the orbital welding power supply ORBITAT 300 CA AVC/OSC

DIMENSIONS (VALUES, SEE TABLE):

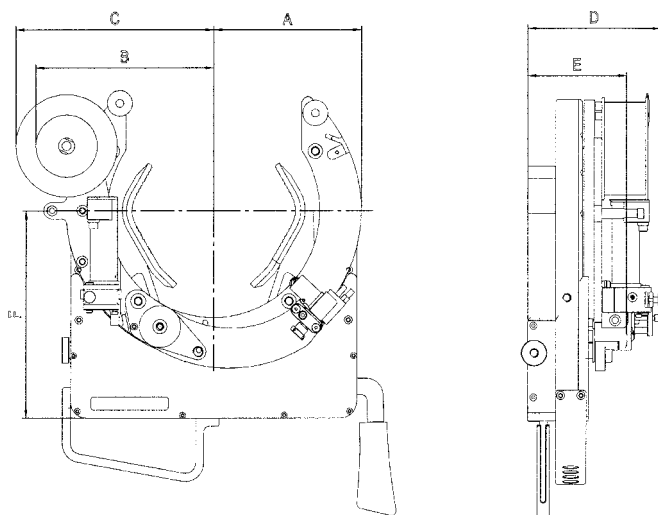

SCOPE OF DELIVERY

Including:	<ul style="list-style-type: none"> 1 Open orbital weld head ORBIWELD TP 1 Durable storage and shipping case 1 Handle (TP 1000: 2 handles) 1 Expansion jaw set of size 8 - 28 mm/0.315" - 1.102" (TP 250 only) 1 Tool set 1 Power connector adapter 1 Operating instructions and spare parts list
Suitable accessories (available option):	<ul style="list-style-type: none"> Clamping units "V2" (retrofit kits) Cold wire feed units "KD" (retrofit kits) Extension kits for for TP 400 Control cable Remote control ESG tungsten grinders ORBmax residual oxygen meter ORBIPURGE forming set Earth cable Hose package extensions WS2 tungsten electrodes

Open orbital weld heads OW TP

ORBIWELD TP 250 ORBIWELD TP 400 (AVC/OSC) ORBIWELD TP 600 (AVC/OSC) ORBIWELD TP 1000 (AVC/OSC)

Features, application range, technical data and scope of delivery, see page 55.

The following accessories are essentially required for operating the TP open orbital weld heads and must be ordered separately:

- Control cable, see page 59
- Earth cable, see page 86

ARTICLE	WITH COLD WIRE UNIT (KD)	CODE		WEIGHT OF MACHINE KG**	DISPATCH WEIGHT KG
Open orbital weld head TP 250	-	811 000 001		7.000	15.600
Open orbital weld head TP 250	KD4	811 000 005		8.900	20.000
Open orbital weld head TP 400	-	812 000 010		11.000	20.000
Open orbital weld head TP 400	KD3-100	812 000 011		12.500	20.000
Open orbital weld head TP 400 AVC/OSC*	KD3-100	812 000 012		15.200	24.800
Open orbital weld head TP 600	-	813 000 001		13.700	23.600
Open orbital weld head TP 600	KD3-100	813 000 005		15.200	30.000
Open orbital weld head TP 600 AVC/OSC*	KD3-100	813 000 002		18.900	33.300
Open orbital weld head TP 1000	-	814 000 001		22.500	38.000
Open orbital weld head TP 1000	KD3-100	814 000 005		24.000	40.900
Open orbital weld head TP 1000 AVC/OSC*	KD3-100	814 000 002		28.700	45.300

* Only applicable in combination with the orbital welding power supply ORBIMAT 300 CA AVC/OSC (see from page 11).

* Machine weight including hose package.

Suitable accessories (available option):

- Clamping units "V2" (retrofit kits), see page 58
- Cold wire feed units "KD" (retrofit kits), see page 58
- Extension kits for clamping jaws for TP 400, see page 59
- Earth cable, see page 86
- Control cable, see page 59
- Remote control, see page 16



ORBIWELD TP 250



ORBIWELD TP 400 KD3-100



ORBIWELD TP 400 AVC/OSC



ORBIWELD TP 600



ORBIWELD TP 1000

OPEN ORBITAL WELD HEADS



KD4 with open lift-off lid



KD3-100 with Ø 100 standard reel



KD retrofit kit



Clamping unit TP 400 complete

Accessories for ORBIWELD TP

Cold wire feed units "KD" (retrofit kits)

Scope of delivery:

- 1 Feed motor for wire Ø 0.8 mm (0.031")
- 1 Wire adjusting unit
- 1 Wire nozzle with wire core (for wire Ø 0.8 mm (0.031"))
- 1 Wire reel retainer for Ø 100 mm/1 kg (3.937"/2.2 lbs) standard wire reels
- 1 External cold wire box (KD4 only)

ARTICLE	APPLICABLE WITH	CODE		KG
Cold wire feed KD4	TP 250	811 050 001		2.110
Cold wire feed KD3-100*	TP 400*	812 050 061		0.680
Cold wire feed KD3-100	TP 600	813 050 001		0.680
Cold wire feed KD3-100	TP 1000	814 050 008		0.720

* For retrofitting the orbital weld head must be sent to the Orbitalum service department.

KD retrofit kits

For retrofitting the cold wire feed unit to wire Ø 1.0 mm (0.039").

ARTICLE	APPLICABLE WITH	CODE		KG
KD retrofit kit to wire Ø 1.0 mm (0.039")	TP 250	811 050 046		0.115
KD retrofit kit to wire Ø 1.0 mm (0.039") V2*	TP 400/600/1000 incl. AVC/OSC	812 050 076		0.115

* Please consider the serial numbers, see above.

Clamping units "V2" (retrofit kits)

Since 11/2013 (ORBIWELD TP 400 and TP 600 (AVC/OSC)) and since 09/2017 (ORBIWELD TP 250) our orbital weld heads are delivered with a new clamping unit. For older models we offer the possibility to retrofit this new clamping unit quickly and easily.

Please submit the respective machine number with the order (see the type plate). The new clamping unit is supplied including a new type plate.

Advantages of the new clamping unit:

- Improved handling, easier and more precise alignment of the weld head
- Increased clamping power
- Includes clamping jaws made of stainless steel (1.4305); clamping jaws for other applications also available (see from page 59)

Scope of delivery:

- 1 Clamping unit with clamping jaws
- 4 Fastening screws M4x20

ARTICLE	CODE		KG
Clamping unit "V2" for TP 250 complete	811 050 050		
Clamping unit "V2" for TP 400 complete	812 050 044		3.785
Clamping unit "V2" for TP 600 complete	813 050 024		4.750

OPEN ORBITAL WELD HEADS

Extension kits for clamping jaws

The extension kits for stainless steel clamping jaws are only available for TP 400 for expanding the clamping range to a pipe OD min. 15.00 mm (0.591").

ARTICLE	VERSION	PIPE OD [MM]	PIPE OD [INCH]	CODE		KG
Extension kit for clamping jaws for TP 400	Stainless steel	15.00 - 30.00	0.591 - 1.181	812 002 005		0.520



Extension kit for clamping jaws for TP 400

Control cable

Suitable for all ORBIWELD TP open orbital weld heads

ARTICLE	LENGTH [M]	LENGTH [INCH]	CODE		KG
Control cable for ORBIWELD TP	7.5	24.6	811 050 003		1.202



Control cable

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- Hose package extensions, see page 86
- WS2 tungsten electrodes, see page 87
- Torch and cold wire consumables, see page 89
- Earth cable, see page 86

OPEN ORBITAL WELD HEADS

Standard-compliant, precise and reproducible weld seam preparation

For more than 40 years construction companies rely on the standard set by Orbitalum in the industrial prefabrication of pipeline systems: With our pipe saws for precise cutting and beveling in just seconds.

Please ask for our separate catalogue to learn more about this and other products for the orbital weld seam preparation:

» Catalogue "Orbital cutting & beveling machines for high-purity process piping"

Tube-to-tube-sheet orbital weld heads




Quality products from Orbitalum Tools - always a good decision!



For our products we choose only the best materials and suitable manufacturing methods and attach great importance during the development phase to ensure a high level of product quality and durability.

Our machines and tools are assembled, configured, tested and packed by hand, with the highest care by our qualified and motivated employees in Singen (Germany).

Our staff are standing for this aim with their expertise and experience.

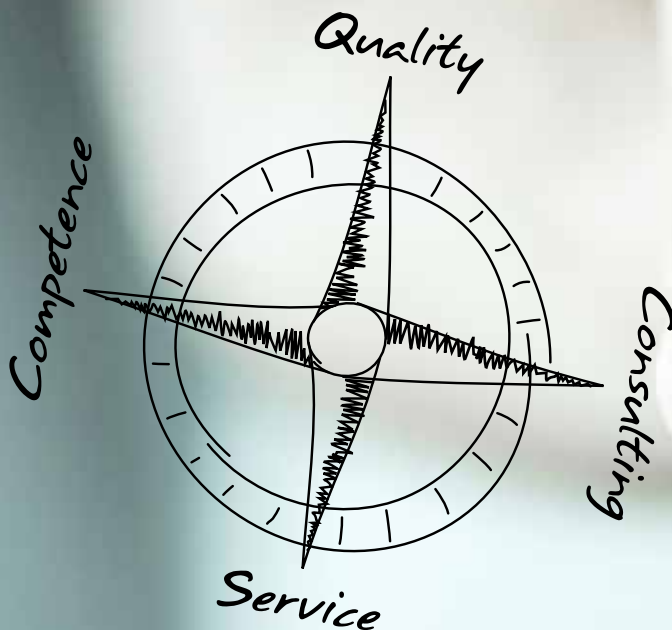

TX 38P

Orbital TIG weld head for
pipe-to-pipe-sheet connections

Tube-to-tube-sheet orbital weld head

The orbital TIG weld head from Orbitalum for manufacturing pipe-to-pipe-sheet connections guarantees extremely short production times of industrial heat exchangers at constantly high reproducible quality. Also excellently suitable for repair, maintenance and servicing work.



Applicable for flush tubes, slightly recessed tubes and protruding tubes



Ideal for repairing and maintaining of large-scaled heat exchanger plants



Precise centering of the weld head in the tube via dimensionally stable clamping mandrels which are available for tube inner diameters 13.8 - 37 mm (0.543" - 1.457")

Welding heat exchanger tubes particular effectively and easily: With our TX 38P for automated TIG orbital welding you can now accurately and precisely weld tube sheets with heat exchanger tubes, such as thousands of welded joints on cooling tubes.

In connection with an ORBITALUM orbital welding power supply, the user is being offered an extremely innovative and economical welding system: All ORBITALUM orbital welding power sources automatically detect the head and its properties so that the operator only has to call up his or her specified joining program and start the joining process before beginning to weld.

To increase productivity, the operator can work with the optionally available switching unit ORBITWIN with up to two weld heads on one machine in an alternating fashion, which reduces welding times and downtimes considerably.

THE ADVANTAGES AT A GLANCE:

- Lightweight, hand-held TIG orbital weld head designed for welding of tubes to tube-sheets
- Precise working in any position to achieve high-quality results on horizontal or vertical tube sheets
- Applicable for flush tubes, slightly recessed tubes and protruding tubes
- Compatible with AML clamping mandrels, model 96
- Service friendly design of the clamping and drive system within the housing
- Self-supporting weld head at the tube sheet via stable clamping mandrels (eyelet for spring balancer available)
- Limit switch for the electrode position; thus, the start position is freely selectable
- Integrated rapid adjustment of the electrode position to the tube diameter
- Constant or pulsating rotor movement possible (CONT-STEP-Mode)
- Sturdy, speed-regulated 24-volt driving motor with a reduction gear

- Liquid-cooled slide contact for transmission of welding current prevents rotary transmission and leakages
- Including highly flexible hose package (length: 7.5 m/24.6 ft) with strain relief to the power source - optionally extendable to up to 20.0 m (64 ft)

These are the highlights of the TX 38P:

- ✓ Pneumatic clamping and centering
- ✓ Liquid-cooled welding head housing
- ✓ One-hand operation
- ✓ Quick change system for arbors
- ✓ Integrated control panel
- ✓ Chambered shielding gas cover



Simple and precise setting of the electrode position




One-hand operation through integrated remote control and pneumatic control via handle



High-quality results at horizontal or vertical pipe sheets



Rapid changing of clamping elements



Optionally available: Ground cable, spring sleeves and diverse clamping segment sizes




The perfect complement: Orbital welding power supplies of the ORBIMAT series

APPLICATION RANGE		TX 38P	
Code		830 000 005	
Tube ID, min. - max.	[mm]	10 - 40	
	[inch]	0.394" - 1.575"	
TECHNICAL DATA			
Welding current, max.,	[Amp DC]	150	
Rotation speed, max.	[U/min]	10	
Drive motor with tachometer	[VDC]	24	
Electrode Ø	[mm]	1.6 (available option: 2.4)	
	[inch]	0.063 (available option: 0.094)	
Gas flow	[l/min]	5 - 20	
Gas type		Argon/Argon-Helium/Argon-Hydrogen	
Water pressure, max.	[bar]	2,5	
Air pressure	[bar]	5 - 7	
Hose package length	[m]	7,5	
	[ft]	25	
Machine weight including hose package	[kg]	7,5	
	[lbs]	16.5	
Type of connection		Fully compatible with all Orbitalum power supplies	
DIMENSIONS			
Dimension "A"	[mm]	65.0	[inch] 2.559
Dimension "B"	[mm]	241.0	[inch] 9.488
Dimension "C"	[mm]	207.0	[inch] 8.150
Dimension "D"	[mm]	36.0	[inch] 1.417
Dimension "E"	[mm]	68.0	[inch] 2.677
Dimension "F"	[mm]	185.0	[inch] 7.283
Dimension "G"	[mm]	110.0	[inch] 4.331

The technical data are not binding. They are not warranted characteristics and are subject to change.

SCOPE OF DELIVERY	
Including:	<ul style="list-style-type: none"> • 1 Tube-to-tube-sheet orbital weld head TX 38P • 1 Hose package, length 7.5 m (25 ft) • 1 Integrated remote control • 1 Durable storage and shipping case • 1 Tool set • 1 Power connector adapter • 1 Operating instructions and spare parts list
The following accessories are essentially required for operating the TX38P:	
To be ordered separately:	<ul style="list-style-type: none"> • Arbors • Spring sleeves • Clamping segments • Tungsten support
FURTHER ACCESSORIES	
Available option:	<ul style="list-style-type: none"> • Spring balancers • ESG Tungsten Grinders • Earth cable • Hose package extensions 5 m / 10 m / 15 m • Pressure regulator • WS2 tungsten electrodes
EQUIPMENT	
Integrated remote control, with control keys:	<ul style="list-style-type: none"> • START/STOP welding process • ON/OFF gas • Motor (rotor movement) • Approaching the end position (home position) • Activating the clamping mandrel pneumatic

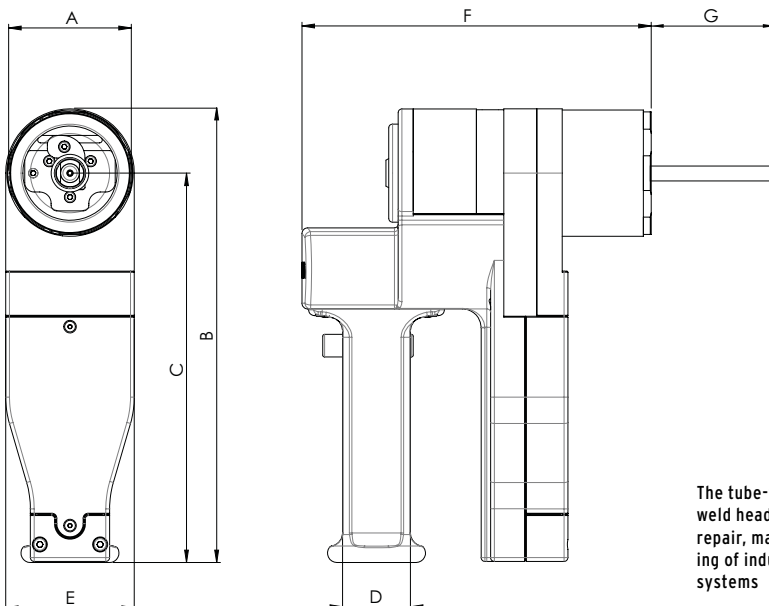

The tube-to-tube-sheet orbital weld head TX 38P: Ideal for the repair, maintenance and servicing of industrial heat exchanging systems

Tube-to-tube-sheet orbital weld head

TX 38P

Features, application range, technical data and scope of delivery, see page 63.

The following accessories are essentially required for operating the tube-to-tube-sheet orbital weld head and must be ordered separately:

- Arbors, see page 66
- Spring sleeves, see page 66
- Clamping segments, see page 66
- Earth cable, see page 86



TX 38P

ARTICLE	CODE		WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Tube-to-tube-sheet orbital weld head TX 38P	830 000 005		7.500	15.600

* Machine weight including hose package

Suitable accessories (available option):

- Arbors, see page 66
- Spring sleeves, see page 66
- Clamping segments, see page 66
- Tungsten support, see page 66
- Earth cable, see page 86
- Spring balancers, see page 86
- Hose package extensions, see page 86
- Power connector adapter set, see page 87

TUBE-TO-TUBE-SHEET ORBITAL WELD HEADS




Arbor TX 38P



Spring sleeve



Clamping segments



Tungsten support

Accessories for TX 38P

Arbors

Base mandrel including insulation sleeve and clamping cone.

ARTICLE	SUITABLE FOR	CODE		KG
Arbor TX 38P, type A	Spring sleeves, type A	830 020 020		0.130
Arbor TX 38P, type B	Clamping segments, type B	830 020 021		0.130

Spring sleeves

Suitable for arbor, type A.

ARTICLE	PIPE ID [MM]	PIPE ID [INCH]	CODE		KG
Spring sleeve TX 38P, type A1	10.0 - 11.3	0.394 - 0.445	830 020 022		0.030
Spring sleeve TX 38P, type A2	11.0 - 12.7	0.433 - 0.500	830 020 019		0.030
Spring sleeve TX 38P, type A3	12.5 - 14.0	0.492 - 0.551	830 020 023		0.030

Clamping segments

Suitable for arbor, type B.
Each set includes a pair of clamping segments.
Differing dimensions on request.

ARTICLE	PIPE ID [MM]	PIPE ID [INCH]	CODE		KG
Clamping segments TX 38P, type B1	13.8 - 16.8	0.543 - 0.661	830 020 024		0.025
Clamping segments TX 38P, type B2	16.6 - 19.6	0.654 - 0.772	830 020 025		0.045
Clamping segments TX 38P, type B3	19.4 - 22.4	0.764 - 0.882	830 020 026		0.065
Clamping segments TX 38P, type B4	22.2 - 25.2	0.874 - 0.992	830 020 027		0.085
Clamping segments TX 38P, type B5	25.0 - 28.0	0.984 - 1.102	830 020 028		0.105
Clamping segments TX 38P, type B6	28.0 - 31.0	1.102 - 1.220	830 020 029		0.130
Clamping segments TX 38P, type B7	31.0 - 34.0	1.220 - 1.339	830 020 030		0.160
Clamping segments TX 38P, type B8	34.0 - 37.0	1.339 - 1.457	830 020 031		0.200
Clamping segments TX 38P, type B9	37.0 - 40.0	1.457 - 1.575	830 020 032		0.200

Tungsten support

ARTICLE	CODE		KG
Tungsten support TX 38P cpl., 2.4 mm (0.094")	830 013 010		

Other accessories for orbital welding

- Earth cable, see page 86
- Pressure regulator, see page 87
- ESG tungsten grinders, see page 79
- WS2 tungsten electrodes, see page 87
- Torch and cold wire consumables, see page 89
- Power connector adapter set, see page 87

TUBE-TO-TUBE-SHEET ORBITAL WELD HEADS

P16, P16 AVC

Tube-to-tube-sheet orbital weld heads

Our P series is characterized by special design features intended to ensure easy handling combined with a high level of economy and functionality.

With extreme precision, these tube-to-tube-sheet orbital weld heads will produce several thousand weld seams at constant quality.

Tube-to-tube-welding on large-scale heat exchanger with highest precision and efficiency



Easy handling and a maximum of functionality



Liquid-cooled weld head up to 30° freely pivotable

With this TIG weld heads, it is no longer a problem to weld tubes to tubesheets with the highest of accuracy and consistent quality

Its liquid cooling is fed right to the TIG burner head, which ensures more precise working and consistent quality of the welding process, as well as extending the power-on time. The burner head can be pivoted freely by up to 30° - this function is valuable, for instance, on tubes that are entering tubesheets at an angle or in restricted spaces.

ADDITIONAL FEATURES:

- Completely liquid-cooled weld head housing
- Burner head can be pivoted freely by up to 30° (reduced diameter range)
- Weld seam geometries: Recessed, flush and protruded tubes
- Current transmission via multi-plate clutch
- Gas/liquid transmission via rotating coupling
- Three-point mounting made of stainless steel
- Manually electrode positioning
Stroke +/- 5 mm
- Special burner heads adaptable, e.g. for boxheader welding or for IBW/internal bore welding (with/without cold wire)
- Positioning on the tube to be welded is by means of a centering tool that is placed on a retaining arbor (available option)

- The weld heads with integrated cold wire unit additionally include a retaining mechanism for Ø 100 mm/1 kg (3.937"/2.2 lbs) standard wire reels
- Revolving wire feed on the rotational axis of the TIG burner prevents the additional wire from twisting when it exits the wire nozzle
- Three-point mounting included
- 7.5 m (24.6 ft) hose package and tool set included

ADDITIONAL FEATURES P16 AVC:

- Equipped with an electric arc voltage control (AVC) - only applicable in combination with the orbital welding power supply ORBITAT 300 CA AVC/OSC





P16



P16 AVC

APPLICATION RANGE		P16	P16 AVC
Code	with cold wire unit	831 000 001	831 000 002
	without cold wire unit	831 000 003	-
From tube ID to tube OD		10 - 78 mm*	12 - 100 mm*
		0.394" - 3.071"*	0.470" - 3.937"*
TECHNICAL DATA		P16	P16 AVC
Weight of machine with hose package	with cold wire unit	17.5 kg	18.3 kg
		38.6 lbs	40.3 lbs
	without cold wire unit	16.2 kg	-
		35.7 lbs	
Weight of cold wire unit		1.0 kg	1.0 kg
		2.2 lbs	2.2 lbs
Cold wire unit Ø		1.0 kg	1.0 kg
		2.2 lbs	2.2 lbs
Hose package length		7.5 m	7.5 m
		24.6 ft	24.6 ft
SCOPE OF DELIVERY			
Including:		<ul style="list-style-type: none"> • 1 Tube-to-tube-sheet orbital weld head P16 or P16 AVC • 1 Three-point mount • 1 Durable storage and shipping case • 1 Tool set • 1 Power connector adapter • 1 Operating instructions and spare parts list 	
Suitable accessories (available option):		<ul style="list-style-type: none"> • Centering tools and retaining arbors • Special torches (e.g. for boxheader or internal bore welding (IBW)) • Quick-change adapter torch equipment • Cold wire feed unit (retrofit kit) • Spring balancer • Closed gas cover • Front cage • ESG tungsten grinders • Earth cable • Hose package extensions • Pressure regulator • WS2 tungsten electrodes 	
DIMENSIONS		P16	P16 AVC
Dimension "A"		182.97 mm 7.204"	187.05 mm 7.364"
Dimension "B"		427.25 mm 16.821"	427.25 mm 16.821"
Dimension "C"		344.00 mm 13.543"	344.00 mm 13.543"
Dimension "D"		80.00 mm 3.150"	80.00 mm 3.150"
Dimension "E"		95.50 mm 3.760"	95.50 mm 3.760"
Dimension "F"		466.00 mm 18.346"	582.00 mm 22.913"

* Smaller and larger dimensions on request.

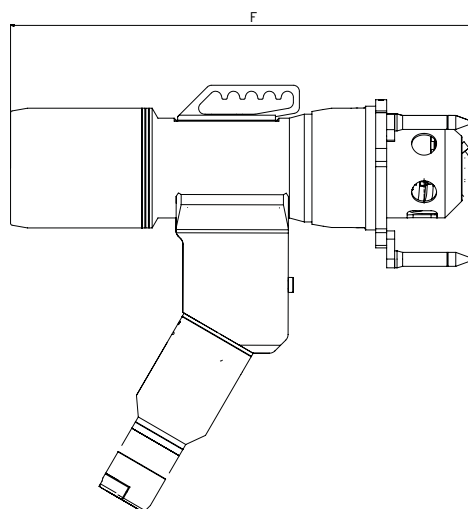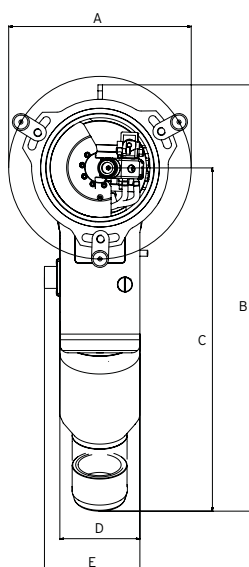

The technical data are not binding. They are not warranted characteristics and are subject to change.

Tube-to-tube-sheet orbital weld heads

P16, P16 AVC

Features, application range, technical data and scope of delivery, see page 67.

The following accessories are essentially required for operating the tube-to-tube-sheet orbital weld heads and must be ordered separately:

- Retaining arbors and centering tools (see from page 72)
- Earth cable (see from page 86)

ARTICLE	CODE		WEIGHT OF MACHINE KG*	DISPATCH WEIGHT KG
Orbital weld head P16 with cold wire unit	831 000 001		17.500	26.500
Orbital weld head P16 without cold wire unit	831 000 003		16.200	25.100
Orbital weld head P16 AVC with cold wire unit	831 000 002		18.300	27.300

* Machine weight including hose package

Suitable accessories (available option):

- Centering tools and retaining arbors, see page 72
- Earth cable, see page 86
- Special torches (e.g. for boxheader or internal bore welding (IBW)), see page 70
- Quick-change adapter torch equipment, see page 70
- Spring balancer, see page 71
- Closed gas cover, see page 71
- Front cage, see page 71
- Torch and cold wire consumables, see page 89
- Remote control, see page 16



P16



P16 AVC

TUBE-TO-TUBE-SHEET ORBITAL WELD HEADS



Accessories for P16, P16 AVC


Special torches

Special torches for the following welding positions are available on request:

Boxheader welding torch



Internal bore welding torch
(IBW):
For welding of recessed tubes
and back sheet applications

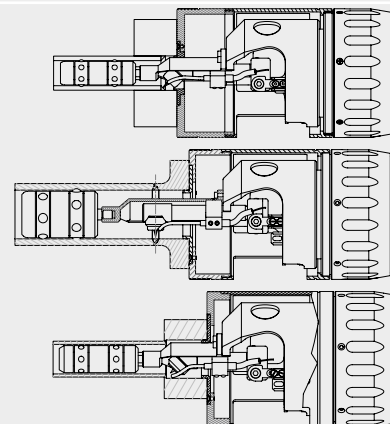

ARTICLE	CODE	KG
Boxheader welding torch	on request	
Internal bore welding torch (IBW)	on request	



Quick-change adapter torch equipment

Quick-change adapter torch equipment

Through this quick-change adapter the torch equipment of the tube-to-tube-sheet orbital weld heads P16 and P16 AVC, can be set up comfortably and exchanged faster, irrespective of the torch.

ARTICLE	CODE	KG
Quick-change adapter torch equipment	831 050 019	0.012

Cold wire feed unit "KD" (retrofit kit)

For upgrading tube-to-tube-sheet orbital weld heads without cold wire unit.
Including wire reel retainer for Ø 100 mm/1 kg (3.937"/2.2 lbs) standard wire reels.

ARTICLE	CODE	KG
Cold wire feed P16 / P16 AVC	831 001 116	1.500

Spring balancer

For load-free suspension of tube-to-tube-sheet orbital weld heads.

ARTICLE	TENSILE LOAD MAX. [KG]	CODE		KG
Spring balancer for P16	10 - 14	832 030 002		3.800



Spring balancers

Closed gas cover

For welding titanium tubes under a full gas cover.

ARTICLE	CODE		KG
Closed gas cover for P16	831 001 101		1.300



Closed gas cover

Front cage

With bearing ring.
Ideal for welding of flush and recessed tubes.

ARTICLE	CODE		KG
Front cage for P16	831 050 001		0.360



Front cage

TUBE-TO-TUBE-SHEET ORBITAL WELD HEADS



Centering tools



Retaining arbor

Centering tools and retaining arbors

The tube diameter is required to select the correct centering tool. Smaller and larger dimensions on request.

When ordering, please consider the correct centering tool/retaining arbor combination.

ARTICLE	GROUP	CARTRIDGE SIZE/NO.	PIPE ID* [MM]	PIPE ID* [INCH]	CODE		KG
Retaining arbor for centering tools for group A					832 020 003		0.060
Centering tool	A	1	10.0 - 10.5	0.394 - 0.413	832 020 004		0.040
Centering tool	A	2	10.5 - 11.0	0.413 - 0.433	832 020 005		0.050
Centering tool	A	3	11.0 - 11.5	0.433 - 0.452	832 020 006		0.070
Centering tool	A	4	11.5 - 12.0	0.452 - 0.472	832 020 007		0.070
Centering tool	A	5	12.0 - 12.5	0.472 - 0.492	832 020 008		0.080
Centering tool	A	6	12.5 - 13.0	0.492 - 0.512	832 020 009		0.100
Centering tool	A	7	12.8 - 14.0	0.504 - 0.551	832 020 011		0.110
Retaining arbor for centering tools for group B					832 020 010		0.070
Centering tool	B	8	13.8 - 15.0	0.543 - 0.591	832 020 012		0.120
Centering tool	B	9	14.8 - 16.0	0.583 - 0.630	832 020 013		0.140
Centering tool	B	10	15.8 - 17.0	0.622 - 0.669	832 020 014		0.150
Centering tool	B	11	16.8 - 18.0	0.661 - 0.709	832 020 015		0.180
Centering tool	B	12	17.8 - 19.0	0.701 - 0.748	832 020 016		0.190
Centering tool	B	13	18.8 - 20.5	0.740 - 0.807	832 020 017		0.200
Centering tool	B	14	19.8 - 22.5	0.780 - 0.886	832 020 018		0.250
Retaining arbor for centering tools for group C					832 020 019		0.115
Centering tool	C	15	22.3 - 25.0	0.878 - 0.984	832 020 020		0.340
Centering tool	C	16	24.5 - 27.0	0.965 - 1.063	832 020 021		0.350
Centering tool	C	17	26.5 - 29.0	1.043 - 1.142	832 020 022		0.360
Centering tool	C	18	28.5 - 31.0	1.122 - 1.220	832 020 023		0.400
Centering tool	C	19	30.5 - 33.0	1.201 - 1.299	832 020 024		0.500
Centering tool	C	20	32.5 - 36.0	1.280 - 1.417	832 020 025		0.510
Centering tool	C	21	35.5 - 39.0	1.397 - 1.535	832 020 026		0.530
Centering tool	C	22	38.5 - 42.0	1.516 - 1.654	832 020 027		0.550
Centering tool	C	23	41.5 - 45.0	1.634 - 1.772	832 020 028		0.560
Centering tool	C	24	44.5 - 48.0	1.752 - 1.890	832 020 029		1.000
Centering tool	C	25	47.5 - 51.0	1.870 - 2.008	832 020 030		1.200
Retaining arbor for centering tools for group D					832 020 031		0.215
Centering tool	D	26	50.5 - 54.0	1.988 - 2.126	832 020 032		1.500
Centering tool	D	27	53.5 - 58.0	2.106 - 2.283	832 020 033		1.800
Centering tool	D	28	57.5 - 62.0	2.264 - 2.441	832 020 034		1.900
Centering tool	D	29	61.5 - 66.0	2.421 - 2.598	832 020 035		2.100
Centering tool	D	30	65.5 - 70.0	2.579 - 2.756	832 020 036		2.400
Centering tool	D	31	69.5 - 74.0	2.736 - 2.913	832 020 037		2.600
Centering tool	D	33	77.5 - 82.0	3.051 - 3.228	832 020 039		3.100
Centering tool	D	34	82.0 - 87.0	3.228 - 3.425	832 020 045		3.100
Centering tool	D	36	91.0 - 95.0	3.582 - 3.740	832 020 047		3.300
Centering tool	D	37	95.0 - 99.0	3.740 - 3.897	832 020 048		3.960

* Smaller pipe dimensions on request.

Other accessories for orbital welding

- Earth cable, see page 86
- ESG tungsten grinders, see page 79
- WS2 tungsten electrodes, see page 87
- Torch and cold wire consumables, see page 89

TUBE-TO-TUBE-SHEET ORBITAL WELD HEADS

DVR


Turntables for
TIG orbital welding

Welding turntables

The turning gears of Orbitalum for the mechanical TIG orbital welding are a reliable and efficient solution for the welding of rotating workpieces, short molded parts and fittings.



Welding turntable DVR 100
with ORBITAT 165 CA power
source

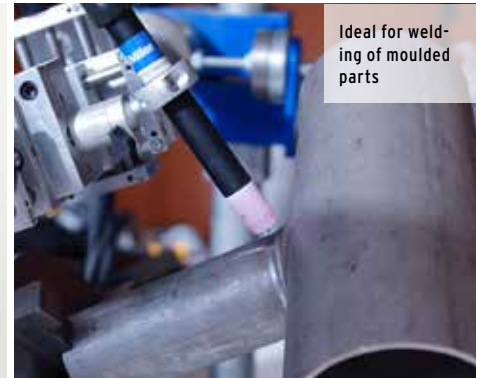

Ideal for weld-
ing of moulded
parts



Welding turntable DVR 50

Three-jaw chuck for exact
positioning and fixating
of the workpiece

Compact turntables for industrial manufacturing or for flexible workshop use – in combination with a power source of the ORBITAT series a welding system of the highest precision and nevertheless extremely simple handling.

All orbital welding power sources from Orbitalum automatically detect the turntables and their properties so that the operator only has to call up his or her specified welding program and start the process before beginning to weld.

The welding turntables are available in different versions and can be equipped with various options as required. Thanks to the stable construction even massive workpieces can be positioned without any problems. In the process the powerful clamping is carried out without any deformation of the workpiece.

While the quality of the weld seam remains at a constantly high level, the physical burden for the operator is reduced significantly. The result: Maximum safety and productivity.

The advantages at a glance:

- Turntable can be tilted steplessly from 0 to 90°
- Centered clamping three-jaw chuck made of hardened and polished steel
- Three-jaw lathe chuck available for different clamping ranges
- Robust steel structure, excellently suited for use even under extreme process conditions
- Stable, swivel torch stand
- Three-coordinate torch support
- Ball-joint holder for TIG machine welding torch
- Liquid-cooled TIG torch head (200 A)
- Remote controls for higher operator comfort (available optionally)
- Cold-wire supply for wire Ø 0.8 mm (0.031") and 1.0 mm (0.039") for welding with cold wire (available optionally)


- Modern functional design
- Arc gap control unit for automatic controlling and holding of the arc gap (AVC = Arc Voltage Control)
- Shorter welding times at constant high quality
- Compatible with all power sources of the ORBITAT series

The most important advantages of the DVR turntables:

- ✓ Stepless tilting up to 90°
- ✓ High-quality three-jaw chuck
- ✓ 3-axis torch support
- ✓ Modular extendable structure
- ✓ Direction of rotation selection
- ✓ Cold wire retrofitted optionally
- ✓ Wire equipping quick change system
- ✓ Liquid-cooled torch



Robust steel structure, excellently suited for use even under extreme process conditions



Liquid-cooled torch



Three-jaw lathe chuck (available separately)



Control cable and ground cable (available separately)



Remote controls for higher operator comfort (available separately)



Cold-wire supplies DVR (retrofitting kits) for welding with cold wire including feed motor and wire adjusting unit

FEATURES & TECHNICAL DATA		DVR 50	DVR 50 AVC	DVR 100	DVR 100 AVC
Code		855 000 011	855 000 012	855 000 001	855 000 002
WELDING TURNTABLES		DVR 50	DVR 50 AVC	DVR 100	DVR 100 AVC
Max. load in horizontal position (workpiece + lathe chuck), max.:		50 kg (110 lbs)	50 kg (110 lbs)	100 kg (220 lbs)	100 kg (220 lbs)
Dimensions:		300 x 300 x 395 mm (11.8" x 11.8" x 15.6")	300 x 300 x 395 mm (11.8" x 11.8" x 15.6")	600 x 570 x 695 mm (23.6" x 22.4" x 27.4")	600 x 570 x 695 mm (23.6" x 22.4" x 27.4")
Distance floor to rotating axis:		279 mm (11")	279 mm (11")	590 mm (23.2")	590 mm (23.2")
Turntable can be tilted steplessly from 0 to 90°		●	●	●	●
Locking via two clamping levers		●	●	●	●
Turning plate-Ø OD:		300 mm (11.81")	300 mm (11.81")	400 mm (15.75")	400 mm (15.75")
Hollow shafts-Ø ID:		30 mm (1.18")	30 mm (1.18")	125 mm (4.9")	125 mm (4.9")
Built-in weld power coupling for mass transfer to turning plate		●	●	●	●
Weld current built-in plug for ground cable connection		●	●	●	●
Limit switch for zero setting and speed calibration		●	●	●	●
Stand console for mounting the stand directly on the turntable		○	○	●	●
Mounting holes for floor fastening		●	●	●	●
Signal distribution box with connecting option for control cable ORBIMAT-DVR, turntable motor, limit switch, cold wire supply and remote control OWH BASIC		●	●	●	●
Tilt lever for selecting the direction of rotation		●	●	●	●
STAND		DVR 50	DVR 50 AVC	DVR 100	DVR 100 AVC
Weld torch stand mounted on console		○	○	●	●
Weld torch stand to be fastened separately		●	●	○	○
Base clamp with mounting holes for fastening at point of use		●	●	○	○
Dimensions stand tube OD x L:		50 x 1200 mm (2" x 47.2")	50 x 1200 mm (2" x 47.2")	50 x 1200 mm (2" x 47.2")	50 x 1200 mm (2" x 47.2")
Dimensions extension arm OD x L:		50 x 800 mm (2" x 31.5")	50 x 800 mm (2" x 31.5")	50 x 800 mm (2" x 31.5")	50 x 800 mm (2" x 31.5")
Extension swivel unit with magnetic stop for locking the welding position		●	●	●	●
Rough adjustment possible without tools via clamping lever, incl. cross-clamping unit		●	●	●	●
Three-coordinate support for torch fine adjustment. Linear adjustment path: 50 mm (2") each		●	●	●	●
Torch holder with ball head		●	○	●	○
MACHINE TORCH		DVR 50	DVR 50 AVC	DVR 100	DVR 100 AVC
Liquid-cooled machine torch with hose package length 4 m (13.12 ft)		●	●	●	●
Current carrying capacity DC: 250 A, AC: 180 A at 100% ED		●	●	●	●
Incl. standard torch equipment for electrode diameter 2.4 mm (0.09")		●	●	●	●
AVC LINEAR UNIT*		DVR 50	DVR 50 AVC	DVR 100	DVR 100 AVC
Arc gap control unit for automatic controlling and holding of the arc gap		○	●	○	●
Linear stroke: 55 mm		○	●	○	●
SCOPE OF DELIVERY		DVR 50	DVR 50 AVC	DVR 100	DVR 100 AVC
Welding turntable of the DVR series (without lathe chuck)	Pc.	1	1	1	1
Stand	Pc.	1	1	1	1
Signal distribution box	Pc.	1	1	-	-
Machine torch with equipment	Pc.	1	1	1	1
AVC linear unit	Pc.	-	1	-	1
Power connector adapter	Pc.	1	1	1	1
Operating instructions and spare parts list	Set	1	1	1	1

The technical data are not binding. They are not warranted characteristics and are subject to change.

● = feature included

○ = feature not included

◐ = feature limited included

* only applicable in combination with the orbital welding power supply ORBIMAT 300 CA AVC/OSC as well as the ground cable for 300 CA AVC/OSC power sources

Welding turntables

DVR

Features, application range, technical data and scope of delivery, see from page 73.

The following accessory is essentially required for operating the DVR welding turntables and must be ordered separately:

- Control cable (see page 76)
- Earth cable (see page 76)
- Three-jaw lathe chuck (see page 76)

ARTICLE	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
Welding turntable DVR 50	855 000 011		45.000	
Welding turntable DVR 50 AVC*	855 000 012		50.000	
Welding turntable DVR 100	855 000 001		100.000	
Welding turntable DVR 100 AVC*	855 000 002		105.000	

* Only applicable in combination with the orbital welding power supply ORBIMAT 300 CA AVC/OSC (see from page 11).

Suitable accessories (available option):

- Three-jaw lathe chuck, see page 76
- Control cable, see page 76
- Earth cable, see page 76
- Remote control OWH BASIC, see page 77
- Remote control ORBIMAT, see page 16
- Cold wire feed units DVR, see page 77
- Power connector adapter set, see page 87



Welding turntable DVR 50




Welding turntable DVR 100

WELDING TURNABLES



Three-jaw lathe chuck

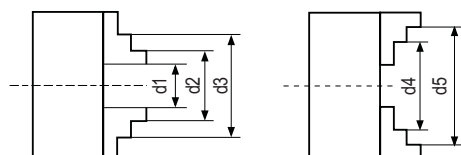

Clamping range three-jaw lathe chuck

Accessories for DVR

Three-jaw lathe chuck

Centered clamping three-jaw chuck made of hardened and polished steel. With cylindrical retainer for clamping the pipe.

Scope of delivery:

- 1 Three-jaw lathe chuck
- 1 three-jaw lathe chuck
- 1 adapter plate for the clamping turning plate
- 1 chuck key
- 1 set each of turning and drilling jaws, graded to the inside and outside

CLAMPING RANGE	D1		D2		D3 MAX.		D4 MAX.		D5 MAX.	
	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]	[MM]	[INCH]
Three-jaw lathe chuck DVR 50	4-90	0.16-3.54	52-135	2.05-5.31	120-202	4.72-7.95	60-145	2.36-5.71	130-200	5.12-7.87
Three-jaw lathe chuck DVR 100	5-118	0.20-4.65	62-174	2.44-6.85	145-256	5.71-10.18	77-188	3.03-7.40	160-250	6.30-9.84
Three-jaw lathe chuck DVR 100	10-131	0.39-5.16	78-200	3.07-7.87	172-299	6.77-11.77	90-215	3.54-8.46	190-315	7.48-12.40

ARTICLE	OUTER Ø CHUCK		INNER Ø HOLE		CODE		KG
	[MM]	[INCH]	[MM]	[INCH]			
Three-jaw lathe chuck DVR 50	200.0	7.874	55.0	2.175	890 030 050		14.500
Three-jaw lathe chuck DVR 100	250.0	9.842	76.0	2.992	890 030 054		25.700
Three-jaw lathe chuck DVR 100	315.0	12.402	103.0	4.055	890 030 051		44.200

Control cable

Required for use with DVR welding turntables.

ARTICLE	LENGTH [M]	LENGTH [FT]	CODE		KG
Control cable for welding turntables DVR	5.0	16.4	890 030 022		1.170



Control cable for welding turntables DVR

Earth cable

Required for use with DVR welding turntables.

ARTICLE	SUITABLE FOR ORBITAL	LENGTH [M]	LENGTH [FT]	CODE		KG
Earth cable for welding turntable DVR	165/180/300	5.0	16.4	890 030 015		2.500
Earth cable for welding turntable DVR	300 AVC	5.0	16.4	890 030 017		2.885



Earth cable for welding turntable DVR

Remote control OWH BASIC

Can be used with all DVR turntables without AVC/OSC function.

For advanced functions such as the **AVC/OSC control**, etc. please order our **remote control ORBIMAT**, see page 16.

For even more operator comfort the DVR welding turntables can be controlled with this "OWH BASIC" remote control. The remote control is connected directly to the turntable and disposes of the following standard functions:

- Start/Stop button
- Direction of rotation
- Wire feed
- Wire withdrawal

ARTICLE	CABLE LENGTH [M]	CABLE LENGTH [INCH]	CODE		KG
Remote control OWH BASIC	7.5	24.6	871 050 035		0.368

Cold wire feed units DVR

For welding with cold wire. Can be retrofitted to all DVR turntables.

The cold wire unit can be adjusted individually in four axes.

Retooling of the wire diameter is carried out completely without tools.

Scope of delivery:

- 1 Feed motor
- 1 Wire adjusting unit
- 2 Wire nozzles with wire core
- 1 Wire reel retainer
- Fastening material

TECHNICAL DATA	WIRE FEED QUANTITY MAX.	WIRE Ø		WIRE COIL Ø		WEIGHT WIRE COIL	
	[MM/MIN.]	[MM]	[INCH]	[MM]	[INCH]	[KG]	[LBS]
Cold wire feed unit DVR 50/100	1300	0.8 / 1.0	0.031 / 0.039	100.0	3.937	1.0	2.2
Cold wire feed unit DVR 100	1300	0.8 / 1.0	0.031 / 0.039	300.0	11.811	15.0	33.0

ARTICLE	APPLICABLE WITH	CODE		KG
Cold wire feed unit DVR 50	DVR 50 (AVC)*	855 050 008		
Cold wire feed unit DVR 100	DVR 100 (AVC)	855 050 005		


* Can also be used with DVR 100

Other accessories for orbital welding

- ESG tungsten grinders, see page 79
- ORBmax residual oxygen meter, see page 83
- ORBIPURGE forming set, see page 86
- WS2 tungsten electrodes, see page 87
- Torch and cold wire consumables, see page 89
- Power connector adapter set, see page 87



Remote control OWH BASIC

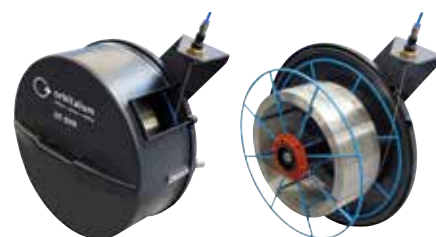


Cold wire feed unit DVR 100 (with and without cover hood)



Adjusting unit and feed motor

Accessories & consumables for orbital welding

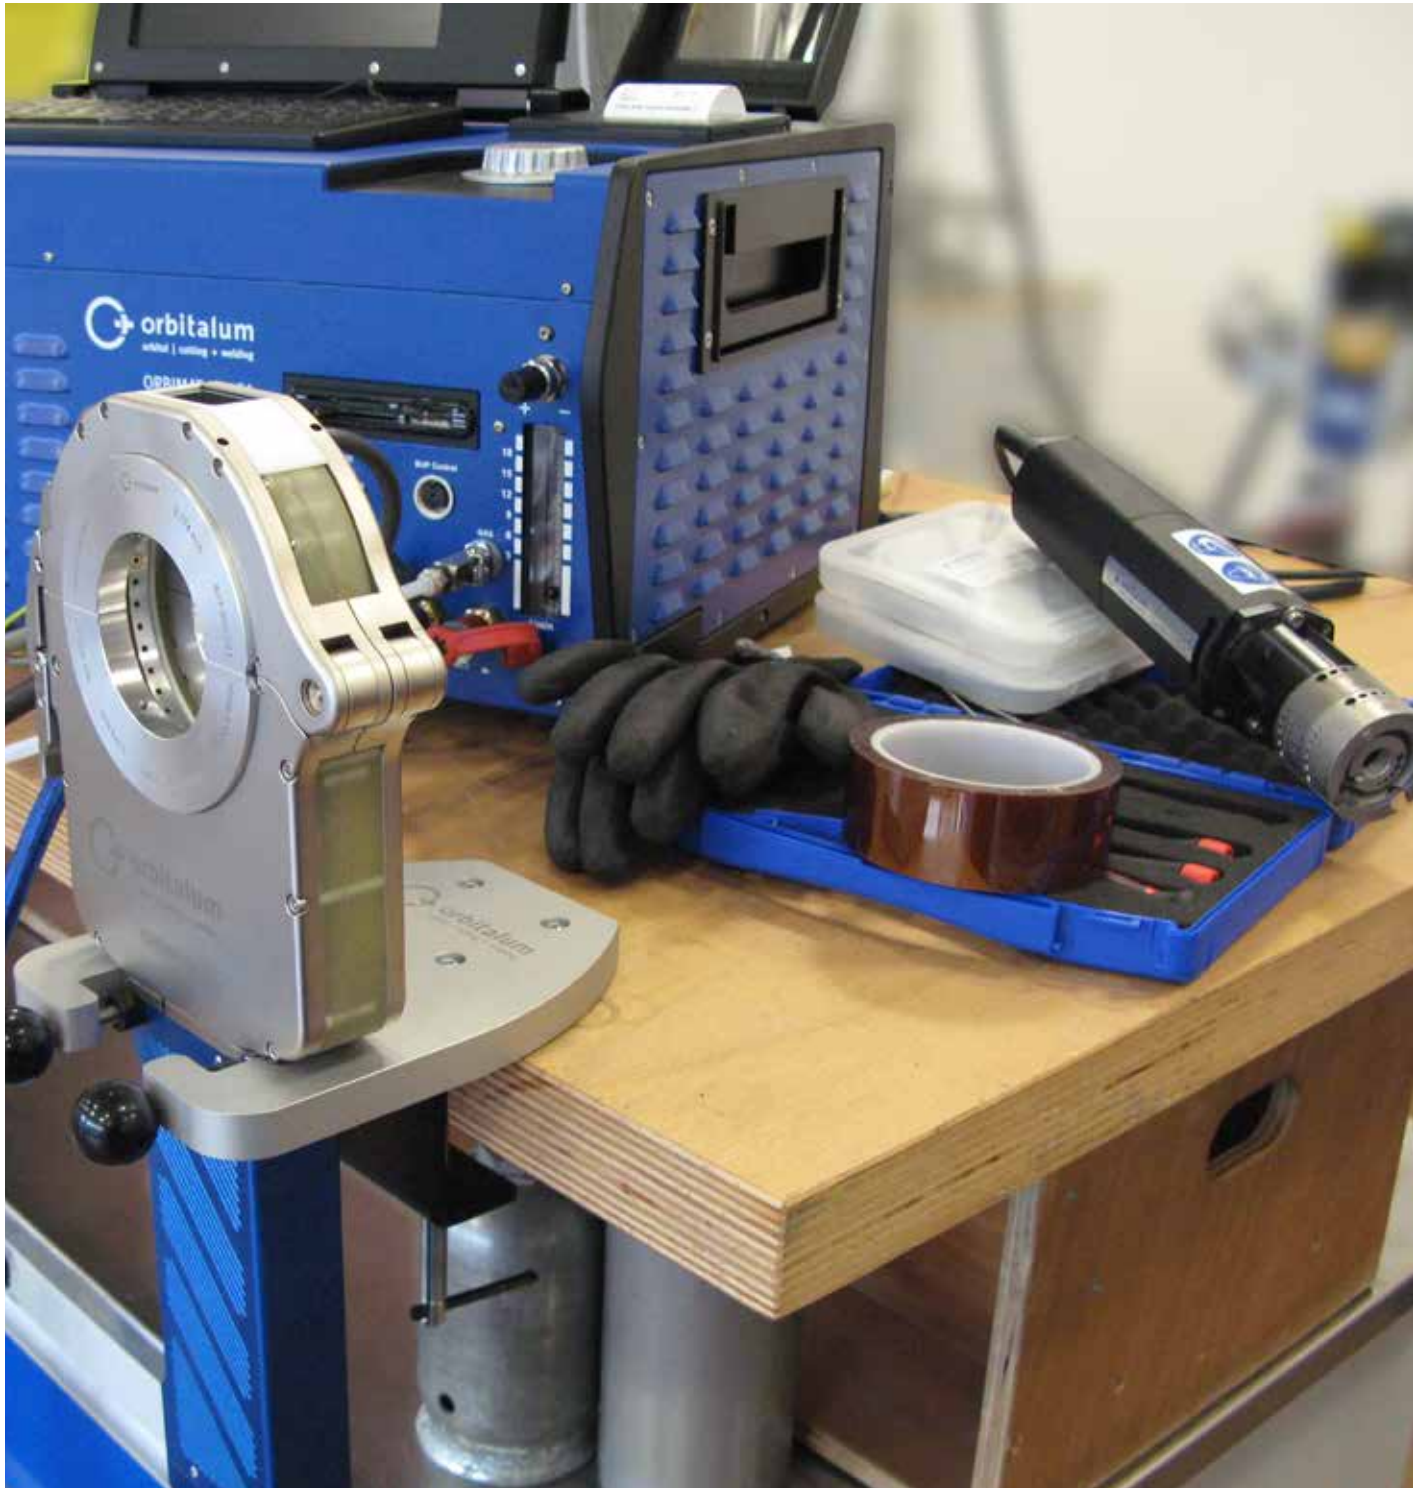

ESG Plus, ESG Plus²

Tungsten Grinders

The best solution for a precise and fast preparation of tungsten electrodes.

The perfect hand-held grinder for cutting, grinding and planing electrodes which are used in WIG/TIG welding machines.



Repeatable points every time due to preset grinding angles	✓
Easy and fast to use	✓
Optimum preparation for orbital and manual welding	✓
Longitudinal grinding for optimum arc ignition and excellent arc stability	✓
Guarantees longer tool life and ease of ignition of the tungsten electrode	✓
Specially designed for one-off jobs on site	✓
Compact design, optimum resilience and perfect reproducibility	✓
Functional design	✓
Precise orbital grinding	✓

The powerful Hand-Tungsten-Grinder for grinding, facing and cutting.

One machine - complete electrode preparation:

- Grinding electrodes:
 - 4 different angles
 - 6 different electrode sizes
- Facing electrodes
- Cutting electrodes


The machines are available with a high-quality and powerful drive with 230 Volt and/or 110 Volt. Machines and accessories are delivered in a durable storage and shipping case.

FURTHER ADVANTAGES:

- Facility for easy trimming of the electrodes (optional)
- External dust extractor can be easily adapted
- Short preparation times with high grinding performance
- No adjustment needs to be done before operation

ADDITIONAL FEATURES ESG PLUS²:

- Portable tungsten grinder with two different grinding wheels. This allows the electrode to be pre-ground with the coarse diamond wheel then finished with the fine diamond wheel.

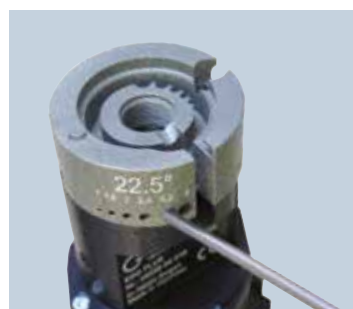

Grinding electrodes:
4 different angles and 6 different electrode
sizes



Facing electrodes



Cutting electrodes



Replaceable grinding wheel diamond-coated
on both sides for optimal performance



SCOPE OF DELIVERY / APPLICATION RANGE		ESG PLUS	ESG PLUS ²
Code	[230 V]	790 052 485 (15°/18°/22.5°/30°)	790 052 585 (15°/18°/22.5°/30°)
		790 052 545 (15°/30°/45°/60°)	790 052 546 (15°/30°/45°/60°)
	[110 V]	790 052 486 (15°/18°/22.5°/30°)	790 052 586 (15°/18°/22.5°/30°)
		790 052 645 (15°/30°/45°/60°)	790 052 646 (15°/30°/45°/60°)
Tungsten grinder	Pc.	1	1
Durable storage and shipping case	Pc.	1	1
Grinding head for electrodes Ø 1.0 - 1.6 - 2.0 - 2.4 - 3.2 - 4.0 mm (0.04" - 1/16" - 0.08" - 3/32" - 1/8" - 5/32")	Pc.	1	1
Grinding head for grinding angle 15° - 18° - 22.5° - 30° or 15° - 30° - 45° - 60°	Pc.	1	1
Diamond grinding wheel Fine (790 052 487)	Pc.	-	1
Diamond grinding wheel Medium (790 052 488)	Pc.	1	-
Diamond grinding wheel Coarse (790 052 550)	Pc.	-	1
Tool to replace the grinding wheel	Pc.	1	1
Operating instructions and spare parts list	Set	1	1
TECHNICAL DATA		ESG PLUS	ESG PLUS ²
Dimensions (including motor)	[mm]	Ø 65 x 350	Ø 65 x 350
	[inch]	Ø 2.56 x 13.78	Ø 2.56 x 13.78
Power	[W]	500	500
Power-on time	[%]	100	100
Speed (Rotary speed)	[rpm]	30.000	30.000
Main supply cable (length)	[m]	3	3
	[inch]	118.1	118.1
Vibration level (EN 28662, part 1)	[m/s ²]	< 2.5	< 2.5
Noise level at the workplace (Idle running), approx.	[dB (A)]	83	83

The technical data are not binding. They are not warranted characteristics and are subject to change. Please consult our general conditions of supply.

Tungsten Grinders ESG

ESG Plus, ESG Plus²

Features, application range, technical data and scope of delivery, see from page 79.

ARTICLE	VERSION	GRINDING ANGLES [°]	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
ESG Plus	230 V, 50/60 Hz EU	15 / 18 / 22.5 / 30	790 052 485		1.430	3.560
ESG Plus	110 V, 50/60 Hz EU/US	15 / 18 / 22.5 / 30	790 052 486		1.430	3.560
ESG Plus	230 V, 50/60 Hz EU	15 / 30 / 45 / 60	790 052 545		1.430	3.560
ESG Plus	110 V, 50/60 Hz EU/US	15 / 30 / 45 / 60	790 052 645		1.430	3.560
ESG Plus ²	230 V, 50/60 Hz EU	15 / 18 / 22.5 / 30	790 052 585		1.520	3.825
ESG Plus ²	110 V, 50/60 Hz EU/US	15 / 18 / 22.5 / 30	790 052 586		1.520	3.825
ESG Plus ²	230 V, 50/60 Hz EU	15 / 30 / 45 / 60	790 052 546		1.520	3.825
ESG Plus ²	110 V, 50/60 Hz EU/US	15 / 30 / 45 / 60	790 052 646		1.520	3.825



ESG Plus



ESG Plus²

Diamond grinding wheels

Replaceable grinding wheel diamond-coated on both sides for optimal performance.

For 1.0 and 1.6 mm (0.039"/0.063") electrodes we recommend the standard grinding wheel. For 2.0 and 2.4 mm (0.078"/0.094") electrodes a medium grained grinding wheel and for 3.2 and 4.0 mm (0.126"/0.157") a coarse grained grinding wheel is advisable.

ARTICLE	APPLICABLE WITH	GRAIN	WHEEL Ø		S		CODE	KG
			[MM]	[INCH]	[MM]	[INCH]		
Diamond grinding wheel	ESG 4	Standard	32.00	1.290	1.2	0.047	790 052 460	0.005
Diamond grinding wheel	ESG Plus, ESG Plus ²	Fine	33.50	1.319	2.2	0.087	790 052 487	0.010
Diamond grinding wheel	ESG Plus, ESG Plus ²	Medium	33.50	1.319	2.2	0.087	790 052 488	0.011
Diamond grinding wheel	ESG Plus, ESG Plus ²	Coarse	33.50	1.319	2.2	0.087	790 052 550	0.011



Diamond grinding wheels

Cutting device

For simple separating of the electrodes.

Applicable up to an electrode diameter of 2.4 mm (0.094").

ARTICLE	SETTING	CUTTING LENGTHS		CODE	KG
		[MM]	[INCH]		
Cutting device	fixed	12.0	0.472	790 052 513	0.030
		13.0	0.512		
		15.0	0.591		
		17.0	0.669		



Cutting device

TUNGSTEN GRINDING TECHNOLOGY




Electrode holder with collet



Spare collet



Wall-/table-/vice-mounting plate



Protective cover



Double-Decker Kit

Electrode holder

For machining smaller electrodes.

The electrode holder is supplied including 1 flexible collet.

ARTICLE	SETTING	ELECTRODE Ø		CODE		KG
		[MM]	[INCH]			
Electrode holder with collet	continuous	1.0 - 3.2	0.039 - 0.126	790 052 457		0.023
Spare collet	continuous	1.0 - 3.2	0.039 - 0.126	790 052 481		0.002

Wall-/table-/vice-mounting plate

For stationary use of the ESG Plus and ESG Plus².

Simple and rapid mounting to a wall, a table or a vice.

ARTICLE	CODE		KG
Wall-/table-/vice-mounting plate	790 052 483		0.102

Protective cover

Easy to adapt on the ESG Plus head.

With integrated retainer for suction units.

For use on electrodes with thorium.

Consider country-specific regulations, standards and guidelines.

ARTICLE	CODE		KG
Protective cover ESG Plus	790 052 496		0.170
Protective cover ESG Plus ²	790 052 596		0.220

Double-Decker Kit

Easy to mount to the ESG Plus.

This attachment makes it possible to use 2 different grinding wheels at the same time.

Including:

- 1 grinding head
- 1 diamond grinding wheel (Coarse)
- 1 cylinder-head screw with collar (M4x34)
- 1 shaft extension.


ARTICLE	APPLICABLE WITH	GRINDING ANGLES [°]	CODE		KG
Double-Decker Kit	ESG Plus	15 / 18 / 22.5 / 30	790 052 490		0.160
Double-Decker Kit	ESG Plus	15 / 30 / 45 / 60	790 052 390		0.100

ORBmax

Residual oxygen meter

This ORBmax residual oxygen meter sets a milestone for fast, exact detection of residual oxygen, and with it complete documentation of these parameters. At the same time, the new measuring method results in greater efficiency and higher quality.

The ORBmax does not require any heating-up time. It recognizes the oxygen percentage reliably, rapidly and precisely during the entire welding process.

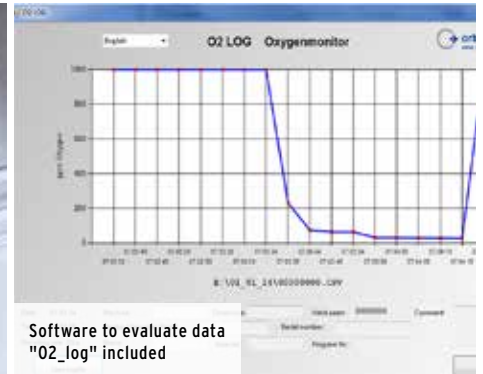

The "Optical oxygen measurement via fluorescence extinction" method for welding technology is far superior to the conventional methods, using zirconium sensors: It requires no warm-up time whatsoever; reliably, quickly and precisely detects the oxygen share in the gas; unchecked alleged increasing of the measured value due to the formation of ozone is eliminated; the measurement is possible in all gas mixtures without manual switch-over (even with forming gas with a variable percentage of hydrogen).

The exact, fast detection of the oxygen content reduces the otherwise long flooding time of the forming gas. The operator can start the safe welding process considerably earlier. As a result, precious working time is saved and the gas consumption reduced. In addition, ORBmax requires no maintenance of any kind. Calibration once a year in accordance with the standard ISO 9001 is sufficient.

For welding pipes in plant and equipment construction for the food processing, beverage, cosmetics and pharmaceuticals industries, medical and bio-technology as well as fine chemicals, comprehensive quality assurance is required and a procedure qualification is specified for the welded seams. For quality certification, not only the values from the power source, but also the residual oxygen values can be documented with the ORBmax. When used as a stand-alone solution, ORBmax records a digital log with a time stamp. In conjunction with the ORBIMAT welding power source, the welding process can be monitored in real-time and automatically switched off when increased oxygen content occurs.

- No warm-up time required
- Quick response
- High measurement accuracy
- Measurement of residual oxygen level during the welding process

- No uncontrolled increase of the measurement during the welding process
- Measurement of forming gas with variable hydrogen content without mode change
- Measurement of the residual oxygen value in all gas mixtures
- Measured value recording on SD card
- User-friendly touchscreen
- Liquid-resistant sensor
- Alarm mode with beeper and changing colour of the display (green/red)
- Protection class IP32
- Setable alarm value and saving interval
- Multirange power supply
- Software to evaluate data
- Can be connected with an ORBIMAT Orbital Welding Power Source
- Maintenance-free sensor
- Pleasant and handy design
- Transportation case with IP67 protection



ORBmax



Practical protective cover included

Residual oxygen meter

ORBmax

Features, see page 83.

TECHNICAL DATA	ORBMAX
Dimensions (l x w x h)	215 x 200 x 74 mm 8.46" x 7.87" x 2.91"
Weight, approx.	2 kg 4.4 lbs
Protection class device	IP32
Protection class transport case	IP67
Power connection	AC 100 - 240 V, 50 - 60 Hz
Measuring range	1 - 999 ppm
SCOPE OF DELIVERY	<ul style="list-style-type: none"> • 1 ORBmax residual oxygen meter • 1 Durable storage and shipping case • 1 power unit supply set 100 - 240 VAC / 12 VDC • 1 measuring hose (with test tip and filter) • 1 SD card including evaluation software "O2_log" • 1 interface cable ORBmax/ORBIMAT CA • 1 interface cable ORBmax/ORBIMAT SW • 2 reserve filter inserts • 1 operating instructions

ARTICLE	VERSION	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
ORBmax	100 - 240 V, 50/60 Hz	882 000 002		2.000	4.775

Interface cable ORBmax/ORBIMAT SW

For retrofitting older ORBmax devices.

Allows the connection to ORBIMAT 180 SW power supplies.

At newer ORBmax devices this interface cable is already included in the scope of delivery.

ARTICLE	CODE		KG
Interface cable ORBmax - ORBIMAT SW	850 040 031		0.065

Consumables for ORBmax

All individual parts are already included in the scope of delivery of the ORBmax.



Measuring hose set (Individual parts)

ARTICLE	CODE		KG
Measuring hose set, including:	882 050 006		0.081
• 1 hose*			
• 1 filter housing including filter insert (1 unit)			
• 1 test tip			
• 1 hose connector			
Hose*	882 012 010		0.050
Filter housing including filter insert (1 unit)	882 020 003		0.021
Filter inserts (5 pieces per packing unit)	882 030 002		0.003
Test tip	882 012 011		0.004
Plastic connector test tip - hose	882 012 012		0.001

* Please specify the hose length in meters when ordering.

OTHER ACCESSORIES FOR ORBITAL WELDING

Comprehensive training program.

We as Orbitalum emphasize on the safe operation of our equipment as it has the utmost priority.

We generally recommend a product safety and user training to clearly understand the proper usage of the equipment and in order to avoid any possible dangers and accidents.

We offer:

- Training on daily or weekly basis
- At any location
- Skilled trainers
- Certification after successful participation
- Fully equipped training centre in Singen
- State-of-the-art training equipment

If you would like to learn more about our comprehensive training program or if you need information about our next user trainings then please contact our service team. Via phone:

+49 (0) 77 31 792-200

Or per e-mail to:

training@itw-ocw.com

Other accessories for orbital welding

ORBIPURGE forming set

Complete with Teflon gas hose and rapid-action couplings.
The ORBIPURGE forming set for tube internal diameters 12 - 110 mm (0.472" - 4.331") includes all accessories for fast and efficient internal forming during orbital welding.

Forming plugs for larger diameters are separately available.

- Suitable for all common materials
- The various stoppers match the internal diameter of the tube exactly and therefore from a continuous sealing
- The complete set is supplied in a durable plastic carrying case
- The scope of delivery includes 2 forming plugs in each size, a Teflon gas hose, and a set of rapid-action couplings
- Particularly suitable where there are very high demands for purity in the forming atmosphere and is an ideal addition to our residual oxygen meter ORBmax (see page 83)
- The included rapid-action couplings allow a simple connection and separation of the gas hose

Inert gas outlets for ORBIPURGE forming plugs:

Suitable for all ORBIPURGE forming plugs.



ORBIPURGE forming set



Inert gas outlets



Earth cable



Hose package extensions

Earth cable

For use in combination with an orbital welding power supply of the ORBIMAT series.

ARTICLE	LENGTH [M]	LENGTH [FT]	CODE	KG
Earth cable for ORBIMAT 165/180/300 welding power supplies	5.0	16.4	811 050 005	2.400
Earth cable for ORBIMAT 300 CA AVC/OSC welding power supplies	5.0	16.4	812 050 046	2.850

Hose package extensions

Suitable for all Orbitalum orbital weld heads, with the exception of the ORBIWELD TP AVC/OSC heads.

Other lengths on request.

ARTICLE	LENGTH [M]	LENGTH [FT]	CODE	KG
Hose package extension 5 m (16 ft)	5	16	871 050 011	7.600
Hose package extension 10 m (32 ft)	10	32	871 050 012	14.600
Hose package extension 15 m (49 ft)	15	49	871 050 013	22.000
Hose package extension 20 m (64 ft)	20	64	871 050 016	28.700


OTHER ACCESSORIES FOR ORBITAL WELDING

Pressure regulator

With 2 adjustable flow displays and option to connect welding and forming gas.

TECHNICAL DATA	ARGON/HYDROGEN	ARGON
Inlet pressure (max.)	200 bar	230 bar
Flow indicator	up to 50 L/min.	up to 30 L/min.
Gas cylinder connection	W21.8x1/14" LH	W21.8x1/14"
Hose connection	G 3/8 LH	G 1/4

ARTICLE	VERSION	CODE	KG
Pressure regulator	Argon	888 000 001	1.850
Pressure regulator	Argon/Hydrogen	888 000 002	1.870
Spare seals for pressure regulator		888 000 005	0.002



Pressure regulator

Bar pressure regulator "Argon"

For HX 16P, see page 52.



Bar pressure regulator "Argon"

WS2 tungsten electrodes

WS electrodes are used for DC and AC welding and are a completely satisfactory replacement for the WT electrodes.

Benefits:

- High ignition safety
- Low combustion
- Long service life
- High arc quality

Content: 10 pieces

Length: 175 mm (6.890")

Composition: WS2 = Rare earths (mixed oxides)

Color code: Turquoise

ARTICLE	ELECTRODE Ø [MM]	ELECTRODE Ø [INCH]	CODE	KG
WS2 tungsten electrodes	1.0	0.039	826 004 018	0.006
WS2 tungsten electrodes	1.6	0.063	826 004 019	0.010
WS2 tungsten electrodes	2.4	0.094	826 004 020	0.018



WS2 tungsten electrodes

Power connector adapter set

Easy to use, safe, robust and durable.

For use with older Orbitalum welding power supplies and weld heads with green "Superior" connectors. Newer models are already equipped with the DINSE compatible connectors.

ARTIKEL	CODE	KG
Power connector adapter set for socket & plug	850 030 004	
Power connector adapter for plug	850 030 002	
Power connector adapter for socket	850 030 003	



Power connector adapter set

OTHER ACCESSORIES FOR ORBITAL WELDING



TIG manual welding torch for ORBIMAT

TIG manual welding torch for ORBIMAT

The TIG manual welding torch for ORBIMAT orbital welding power supplies is a high productive welding torch for tacking and manual welding. The liquid-cooled hand torch allows an ideal heat conduction and a long operating life. The compact design, the flexible hose package and the integrated operation control results in a high user-friendliness.

A durable storage and shipping case and a consumable spares kit are included.

Features:

- Liquid-cooled DC 250 A, AC 200 A
- Superflex hose package
- Flexible torch body
- Ergonomic handle

Scope of delivery:

- 1 TIG manual welding torch
- 1 Durable storage and shipping case
- Torch consumable spares kit

The following accessory is essentially required for operating the TIG manual welding torch and must be ordered separately:


- Earth cable, see page 86

ARTICLE	HOSE PACKAGE LENGTH [M]	HOSE PACKAGE LENGTH [FT]	CODE		WEIGHT OF MACHINE KG	DISPATCH WEIGHT KG
TIG manual welding torch for ORBIMAT	4.0	13.0	890 013 010		2.425	6.405

OTHER ACCESSORIES FOR ORBITAL WELDING



Torch and cold wire consumables

ACCESSORIES	CLAMP SLEEVES FOR ELECTRODES			CLAMP SLEEVES FOR PLUNGER			TORCH ISOLATORS		
Picture									
APPLICABLE WITH:	CODE		KG	CODE		KG	CODE		KG
TP 250	811 020 018		0.001	812 005 002		0.003	811 013 001		0.001
TP 400 KD4-100	812 020 024		0.002				812 005 001		0.002
TP 400 KD3-62 (AVC/OSC)	812 020 024		0.002						
TP 600 (AVC/OSC)									
TP 1000 (AVC/OSC)									
P16	831 001 058		0.010	-		-	831 001 007		0.005
P16 AVC									
TIG manual welding torch	812 020 024		0.002	812 020 059		0.005	812 020 060		0.002
DVR welding turntables (Standard)	890 020 039		0.005	890 020 046		0.009	890 020 041		0.002
DVR welding turntables (Jumbo)	-		-	-		-	812 020 065		0.012

ACCESSORIES	WIRE CORES																
Picture																	
Version	TP wire cores 0.8 mm (0.031")			TP wire cores 1.0 mm / 1.2 mm (0.039" / 0.047")			Front wire cores (long) 0.8 mm (0.031")		Rear wire cores (short) 0.8 mm (0.031")								
APPLICABLE WITH:	CODE		KG	CODE		KG	CODE		KG	CODE		KG					
TP 250	811 020 030		0.074	811 002 006			-		-	-		-					
TP 400 KD4-100	812 020 041		0.009	811 002 005		0.009											
TP 400 KD3-62 (AVC/OSC)																	
TP 600 (AVC/OSC)																	
TP 1000 (AVC/OSC)																	
P16	-		-	-		-	831 001 022		0.005	831 001 015		0.005					
P16 AVC																	
TIG manual welding torch							-		-	-	-						
DVR welding turntables	890 020 055		0.020	890 020 056		0.020	-		-	-		-					

ACCESSORIES	HF SPIRALS			TORCH SEAL			GAS NOZZLES			GAS LENSES			
Picture													
APPLICABLE WITH:	CODE		KG	CODE		KG	CODE		KG	CODE		KG	
TP 250	831 001 027		0.003	811 005 020		0.003	811 020 017		0.004	811 020 016		0.004	
TP 400 KD4-100	811 050 011		0.002	-		-	812 020 023		0.010	812 020 022		0.010	
TP 400 KD3-62 (AVC/OSC)	831 001 027		0.003										
TP 600 (AVC/OSC)													
TP 1000 (AVC/OSC)													
P16	811 050 011		0.002	-		-	831 001 060		0.020	831 001 161		0.009	
P16 AVC													
TIG manual welding torch							-	-	812 020 023		0.010	812 020 022	
DVR welding turntables (Standar)	-	-	-	-	-	-	812 020 023		0.010	812 020 022		0.010	
DVR welding turntables (Jumbo)	-	-	-	-	-	-	812 020 064		0.039	812 020 063		0.048	

OTHER ACCESSORIES FOR ORBITAL WELDING

ACCESSORIES		WIRE NOZZLES											
Picture													
Version		Wire nozzle for wire Ø 0.8 mm (0.031")			Wire nozzle for wire Ø 1.0 mm (0.039")			Wire nozzle tip for wire Ø 0.8 mm (0.031")			Wire nozzle tip for wire Ø 1.0 mm (0.039")		
APPLICABLE WITH:		CODE		KG	CODE		KG	CODE		KG	CODE		KG
TP 250		811 018 010		0.004	811 018 011		-	-		-	-		-
TP 400 KD4-100		812 018 045		0.002	812 018 046		0.002	812 018 050		-	812 018 051		-
TP 400 KD3-62 (AVC/OSC)													
TP 600 (AVC/OSC)													
TP 1000 (AVC/OSC)		831 001 031		0.020	831 001 039		0.005			-	-		-
P16													
P16 AVC		831 018 051		0.003	-		-	-		-	-		-
TIG manual welding torch		-		-	-		-	-		-	-		-
DVR welding turntables		855 018 003		-	855 018 004		-	812 018 050		-	812 018 051		-

Notes:



About us

For the finest in pipe & tube cutting, beveling and orbital welding products.

For more than 50 years construction companies rely on the standard in the industrial prefabrication of pipeline systems set by the market leader Orbitalum.

Orbitalum Tools based in Singen, Germany and E.H. Wachs based in Lincolnshire, Illinois, USA are operating jointly as **ITW Orbital Cutting & Welding**, a division of the US industrial group ITW.

Orbitalum Tools is a global leader in providing complete solutions for the industrial prefabrication, installation and maintenance of pipeline systems – for everything from cutting pipes and preparing weld seams to orbital welding for process and plant engineering.

With its high-quality, nearly indestructible, portable and user-friendly pipe processing machines for cutting and beveling, **E.H. Wachs** has established itself in many industries. For example, in the oil and gas industry, the chemical industry and in pipeline and ship construction – in the preproduction, maintenance, repair and dismantling of installations.

ITW (Illinois Tool Works, www.itw.com) is a US Fortune 200 global industrial manufacturer of consumables, specialty equipment and related service businesses headquartered in Glenview, Illinois. ITW Orbital Cutting & Welding is part of the ITW Welding Group, which is world market leader in welding products (e.g. MILLER ELECTRIC, HOBART BROTHERS).

When you partner with us you're not only partnering with the industry leader in portable weld preparation machine tools and orbital welding systems, you're partnering with ITW, the industry leader in advanced welding technologies.

The ITW Orbital Cutting & Welding group stands for the best, most efficient technology for all aspects of orbital cutting and welding around the globe.

As ITW OCW we provide an almost unique product availability, a worldwide customer service and technical support as well as a sales network at local level. A partnership with ITW OCW involves:

- Acclaimed state-of-the-art technology, competent contact partners
- Fast, comprehensive delivery service
- Reliable product support
- Large stocks at local level
- Comprehensive OEM spare parts and consumables
- Strategically ideal located sales locations, service and rental centers
- Excellently factory-trained and certified technicians
- Practical trainings – at our site or at your location
- Certified company

ITW Orbital Cutting & Welding continues the Orbitalum and E.H. WACHS tradition of offering world class products, combined with exceptional service and support, to keep ITW-OCW the supplier of choice for tools used to cut - prep - weld - all from one source.

Waste disposal / environmental protection



Disposal of electrical (electronic) devices

(RL 2012/19/EU)

Electrical (electronic) devices which are marked with the symbol above, may not be disposed of with household waste in accordance to the EU directive 2002/96/EC.

By actively using the offered return and collection systems, you actively contribute to the reuse, recycling and utilisation of electrical (electronic) devices.

Electrical (electronic) used devices contain parts which must be handled selectively according to the EU directive. Separate collection and selective treatment is the basis for environment-friendly disposal and the protection of human health.

Our products that were sold to you after August 13th, 2005 are taken back and treated according to legal standards. These products have to be sent free of charge.

The return of used devices which pose a health or safety risk for human beings due to contamination during use may be refused.

The legally compliant disposal of electrical (electronic) devices that were placed on the market before August 13th, 2005 are in the responsibility of the end-user.



Returning of batteries

Some of our products work with batteries. Batteries which are marked with the symbol above may not be disposed of together with household waste according to the applicable EU directive 2006/66/EU. With batteries containing hazardous substances, the chemical symbol for the heavy metal content is indicated below the waste bin:

Cd = Cadmium
Hg = Mercury
Pb = Lead

The ITW ORBITAL CUTTING & WELDING group provides global customers one source for the finest in pipe & tube cutting, beveling and orbital welding products.



Certified management system according to ISO 9001:2015



Authorized Economic Operator (AEO)

worldwide | sales + service

NORTH AMERICA

USA

E.H. Wachs
600 Knightsbridge Parkway
Lincolnshire, IL 60069
USA
Tel. +1 847 537 8800
Fax +1 847 520 1147
Toll Free 800 323 8185

NORTHEAST

Sales, Service & Rental Center
E.H. Wachs
1001 Lower Landing Road, Suite 208
Blackwood, New Jersey 08012
USA
Tel. +1 856 579 8747
Fax +1 856 579 8748

SOUTHEAST

Sales, Service & Rental Center
E.H. Wachs
171 Johns Road, Unit A
Greer, South Carolina 29650
USA
Tel. +1 864 655 4771
Fax +1 864 655 4772

NORTHWEST

Sales, Service & Rental Center
E.H. Wachs
2079 NE Alcock Drive, Suite 1010
Hillsboro, Oregon 97124
USA
Tel. +1 503 941 9270
Fax +1 971 727 8936

GULF COAST

Sales, Service & Rental Center
E.H. Wachs
2220 South Philippe Avenue
Gonzales, LA 70737
USA
Tel. +1 225 644 7780
Fax +1 225 644 7785

HOUSTON SOUTH

Sales, Service & Rental Center
E.H. Wachs
3327 Daisy Street
Pasadena, Texas 77505
USA
Tel. +1 713 983 0784
Fax +1 713 983 0703

CANADA

Wachs Canada Ltd
Eastern Canada Sales, Service & Rental Center
1250 Journey's End Circle, Unit 5
Newmarket, Ontario L3Y 0B9
Canada
Tel. +1 905 830 8888
Fax +1 905 830 6050
Toll Free: 888 785 2000

Wachs Canada Ltd
Western Canada Sales, Service & Rental Center
5411 82 Ave NW
Edmonton, Alberta T6B 2J6
Canada
Tel. +1 780 469 6402
Fax +1 780 463 0654
Toll Free 800 661 4235

EUROPE

GERMANY

Orbitalum Tools GmbH
Josef-Schuetz-Str. 17
78224 Singen
Germany
Tel. +49 (0) 77 31 - 792 0
Fax +49 (0) 77 31 - 792 500

UNITED KINGDOM

Wachs UK
UK Sales, Rental & Service Centre
Units 4 & 5 Navigation Park
Road One, Winsford Industrial Estate
Winsford, Cheshire CW7 3 RL
United Kingdom
Tel. +44 (0) 1606 861 423
Fax +44 (0) 1606 556 364

ASIA

CHINA

Orbitalum Tools
New Caohejing International
Business Centre
Room 2801-B, Building B
No 391 Gui Ping Road
Shanghai 200052
China
Mob. +86 (0) 186 2183 5518
Tel. +86 (0) 512 5016 7813
Fax +86 (0) 512 5016 7820


INDIA

ITW India Pvt. Ltd.
Sr.no. 234/235 & 245
Plot no. 8, Gala #7
Indialand Global Industrial Park
Hinjawadi-Phase-1
Tal-Mulshi, Pune 411057
India
Tel. +91 (0) 20 32 00 25 39
Mob. +91 (0) 91 00 99 45 78

AFRICA & MIDDLE EAST

UNITED ARAB EMIRATES

Wachs Middle East & Africa Operations
PO Box 262543
Free Zone South FZS 5, AC06
Jebel Ali Free Zone (South-5), Dubai
United Arab Emirates
Tel. +971 4 88 65 211
Fax +971 4 88 65 212

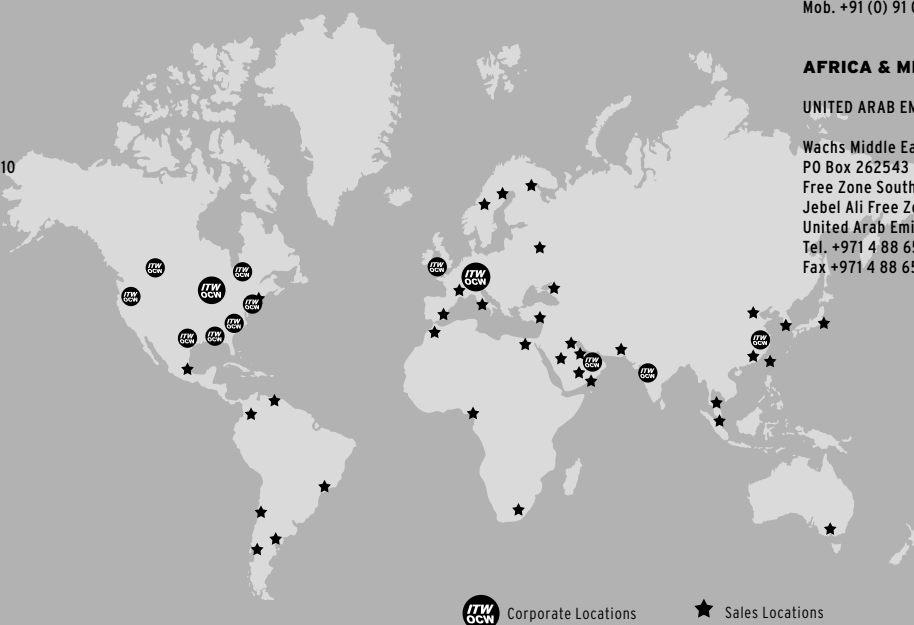

ITW OCN Corporate Locations

★ Sales Locations

© Orbitalum Tools GmbH | EN | 890 700 012 | Rev. 0420 | Subject to change. Our general terms and conditions apply.